



US008205618B2

(12) **United States Patent**  
**Berghash et al.**

(10) **Patent No.:** **US 8,205,618 B2**  
(45) **Date of Patent:** **Jun. 26, 2012**

(54) **MOUTHGUARD**  
(75) Inventors: **Robert Berghash**, Williamsville, NY (US); **Daniel D'Arcy**, Lancaster, NY (US)  
(73) Assignee: **Shield Manufacturing, Inc.**, Tonawanda, NY (US)  
(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 449 days.

4,738,259 A 4/1988 Brown et al.  
4,765,324 A 8/1988 Lake, Jr.  
4,781,709 A 11/1988 Grubman  
4,791,941 A 12/1988 Schaefer  
4,848,365 A 7/1989 Guarlotti et al.  
4,955,393 A 9/1990 Adell  
4,977,905 A 12/1990 Kittelsen et al.  
4,979,516 A 12/1990 Abraham, II  
5,016,649 A 5/1991 Johnson  
5,031,638 A 7/1991 Castaldi  
5,033,480 A 7/1991 Wiley et al.  
5,063,940 A 11/1991 Adell et al.  
5,082,007 A 1/1992 Adell  
5,103,838 A 4/1992 Yousif  
5,152,300 A 10/1992 Horst  
5,152,301 A 10/1992 Kittelsen et al.  
5,165,423 A 11/1992 Fowler et al.  
5,174,284 A 12/1992 Jackson  
5,203,351 A 4/1993 Adell  
5,234,005 A 8/1993 Kittelsen et al.  
5,235,991 A 8/1993 Minneman  
5,277,203 A 1/1994 Hays  
D343,928 S 2/1994 Kittelsen

(21) Appl. No.: **12/075,185**  
(22) Filed: **Mar. 10, 2008**

(65) **Prior Publication Data**  
US 2009/0223526 A1 Sep. 10, 2009


(51) **Int. Cl.**  
**A61C 5/14** (2006.01)  
**A61C 3/00** (2006.01)  
**A61F 5/56** (2006.01)  
(52) **U.S. Cl.** ..... **128/861**; 128/859; 128/848; 128/862; 433/6  
(58) **Field of Classification Search** ..... 128/861, 128/859, 848, 862; 433/6  
See application file for complete search history.

(56) **References Cited**  
U.S. PATENT DOCUMENTS  
D243,127 S 1/1977 Farquharson  
4,041,937 A 8/1977 Diaz  
4,044,762 A 8/1977 Jacobs  
4,063,552 A 12/1977 Going et al.  
4,114,614 A 9/1978 Kesling  
4,337,765 A 7/1982 Zimmerman  
4,471,771 A 9/1984 Brown et al.  
4,502,478 A 3/1985 Lifton  
4,640,273 A 2/1987 Greene et al.

*Primary Examiner* — Patricia Bianco  
*Assistant Examiner* — Victoria J Hicks  
(74) *Attorney, Agent, or Firm* — Simpson & Simpson, PLLC

(57) **ABSTRACT**  
The present invention is a mouthguard to be used in sports to protect the mouth and teeth from blows to the face and head. The mouthguard has a three layer laminate construction and is fabricated from thermoplastic material that may be softened in hot water to enable a user to form it to the contours of his or her mouth. The mouthguard is formed from an upper portion shaped into a channel with holes distributed on the channel floor and a lower platform with posts aligned to fit into the holes. A part of the posts extend from the upper portion to the platform to form gaps between the upper portion and the platform with the gaps acting as air cushions. In one embodiment, a strap is attached to the assembled mouthguard.

**16 Claims, 18 Drawing Sheets**

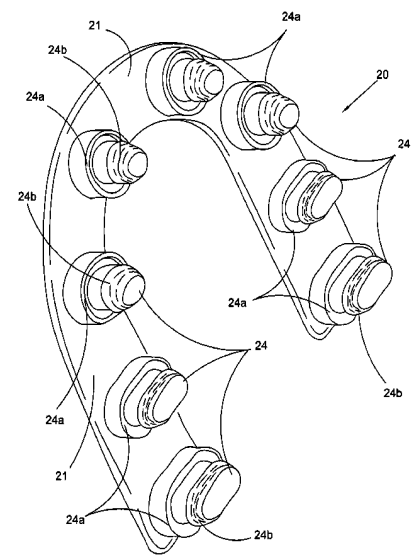

U.S. PATENT DOCUMENTS							
5,293,880	A	3/1994	Levitt	6,851,424	B2	2/2005	Scopton
5,318,043	A	6/1994	Burr et al.	D502,787	S	3/2005	Liu
5,320,114	A	6/1994	Kittelsen et al.	6,886,567	B1	5/2005	Liu
5,339,832	A	8/1994	Kittelsen et al.	D509,028	S	8/2005	Farrell
5,353,810	A	10/1994	Kittelsen et al.	6,932,087	B1	8/2005	Burns
5,365,946	A	11/1994	McMillan	6,932,088	B1	8/2005	Berghash
5,385,155	A	1/1995	Kittelsen et al.	6,935,857	B1	8/2005	Farrell
5,406,963	A	4/1995	Adell	6,941,952	B1	9/2005	Rush, III
5,447,168	A	9/1995	Bancroft	6,951,678	B2	10/2005	Takeshita et al.
5,462,067	A	10/1995	Shapiro	6,986,354	B1	1/2006	Burns
5,469,865	A	11/1995	Minneman	D520,189	S	5/2006	Hillman
D368,329	S	3/1996	Parada	D523,994	S	6/2006	Manzo
5,533,524	A	7/1996	Minneman	D525,749	S	7/2006	Manzo et al.
5,566,684	A	10/1996	Wagner	D526,093	S	8/2006	Manzo et al.
5,582,187	A	12/1996	Hussey	D526,095	S	8/2006	Manzo et al.
5,586,562	A	12/1996	Matz	D527,848	S	9/2006	Manzo et al.
5,636,379	A	6/1997	Williams	D530,863	S	10/2006	Manzo et al.
D382,965	S	8/1997	Wagner	7,128,072	B2	10/2006	Bancroft
5,692,523	A	12/1997	Croll et al.	D532,559	S	11/2006	Manzo et al.
5,718,240	A	2/1998	Dunlop	D533,686	S	12/2006	Hillman
5,718,243	A	2/1998	Weatherford et al.	D536,834	S	2/2007	Hillman
5,720,302	A	2/1998	Belfer	D537,210	S	2/2007	Hillman
5,730,599	A	3/1998	Pak	D537,572	S	2/2007	Hillman
5,746,221	A	5/1998	Jones et al.	7,178,520	B2	2/2007	Scopton
5,785,052	A	7/1998	Johnson	7,182,086	B2	2/2007	Fujieda et al.
5,794,627	A	* 8/1998	Frantz et al. .... 128/848	D537,986	S	3/2007	Manzo et al.
5,810,013	A	9/1998	Belfer	D537,987	S	3/2007	Manzo et al.
5,816,255	A	10/1998	Fishman et al.	D539,484	S	3/2007	Hillman
5,823,193	A	* 10/1998	Singer et al. .... 128/848	D541,481	S	4/2007	Farrell
5,921,241	A	7/1999	Belfer	7,210,483	B1	5/2007	Lesniak et
5,931,164	A	8/1999	Kiely et al.	2002/0134391	A1	9/2002	Karasic
5,941,246	A	8/1999	Roopchand	2002/0139376	A1	10/2002	Waddy
5,954,500	A	9/1999	Spriggs	2002/0144687	A1	10/2002	Kittelsen et al.
5,970,981	A	10/1999	Oched	2002/0144688	A1	10/2002	Kittelsen et al.
6,003,515	A	12/1999	Maness	2002/0144689	A1	10/2002	Kittelsen et al.
6,036,487	A	3/2000	Westerman	2002/0144690	A1	10/2002	Kittelsen et al.
6,039,046	A	3/2000	Swartz et al.	2002/0144691	A1	10/2002	Kittelsen et al.
6,076,526	A	6/2000	Abdelmessih	2002/0144692	A1	10/2002	Kittelsen et al.
6,080,923	A	6/2000	Austin	2002/0144693	A1	10/2002	Kittelsen et al.
6,082,363	A	7/2000	Washburn	2002/0144694	A1	10/2002	Kittelsen et al.
6,092,524	A	7/2000	Barnes, Sr.	2003/0019497	A1	1/2003	Farrell
6,109,266	A	8/2000	Turchetti	2003/0056796	A1	3/2003	Conklin
D434,501	S	11/2000	Redhage	2003/0075184	A1	4/2003	Persichetti
6,178,967	B1	1/2001	Barnes, Sr.	2003/0089371	A1	5/2003	Robertson et al.
6,241,518	B1	6/2001	Sullivan	2003/0101999	A1	6/2003	Kittelsen et al.
6,257,238	B1	7/2001	Meah	2003/0111083	A1	6/2003	Bancroft
6,302,110	B1	10/2001	Yoshida	2003/0136416	A1	7/2003	White
6,314,960	B1	11/2001	Vines	2003/0145863	A1	8/2003	Fischer et al.
6,318,371	B1	11/2001	Tyszkiewicz	2003/0205234	A1	11/2003	Bardach et al.
6,321,752	B1	11/2001	Spottiswoode	2003/0230311	A1	12/2003	Raymond
D452,011	S	12/2001	Redhage	2004/0025887	A1	2/2004	Scopton
6,397,848	B1	6/2002	Kagekata et al.	2004/0103905	A1	6/2004	Farrell
6,491,037	B1	12/2002	Mortenson	2004/0107970	A1	6/2004	Kittelsen et al.
6,491,521	B1	12/2002	Fowler, Jr.	2004/0144393	A1	7/2004	Conklin
6,494,210	B1	12/2002	Mams	2004/0149292	A1	8/2004	Fujieda et al.
6,505,626	B2	1/2003	Kittelsen et al.	2004/0154625	A1	8/2004	Foley
6,505,627	B2	1/2003	Kittelsen et al.	2004/0154626	A1	8/2004	Washburn et al.
6,505,628	B2	1/2003	Kittelsen et al.	2004/0244805	A1	12/2004	Cook et al.
6,508,251	B2	1/2003	Kittelsen et al.	2004/0250817	A1	12/2004	Kittelsen et al.
6,510,853	B1	1/2003	Kittelsen et al.	2004/0250818	A1	12/2004	Cook et al.
D473,976	S	4/2003	Wilkins	2005/0109348	A1	5/2005	Liu
6,584,978	B1	7/2003	Brett et al.	2005/0115571	A1	6/2005	Jacobs
6,588,430	B2	7/2003	Kittelsen et al.	2005/0241650	A1	11/2005	Lombardi
6,637,436	B2	10/2003	Farrell	2005/0284489	A1	12/2005	Ambis, Jr.
6,675,804	B1	1/2004	Pivovarov	2006/0065277	A1	3/2006	Jacobs
6,675,806	B2	1/2004	Kittelsen et al.	2006/0112962	A1	6/2006	Tebbutt et al.
6,675,807	B2	1/2004	Kittelsen et al.	2006/0130851	A1	6/2006	Mathias
6,675,808	B2	1/2004	Karasic	2006/0157062	A1	7/2006	Raymond
6,691,710	B2	2/2004	Kittelsen et al.	2006/0219250	A1	10/2006	Farrell
D493,578	S	7/2004	Manzo et al.	2006/0237020	A1	10/2006	Morgan et al.
D493,920	S	8/2004	Hillman	2006/0278238	A1	12/2006	Borody
6,790,036	B2	9/2004	Graham	2007/0023055	A1	2/2007	Roth
6,805,127	B1	10/2004	Karasic	2007/0079835	A1	4/2007	Croll
D500,895	S	1/2005	Manzo et al.	2007/0084472	A1	4/2007	Berghash

\* cited by examiner

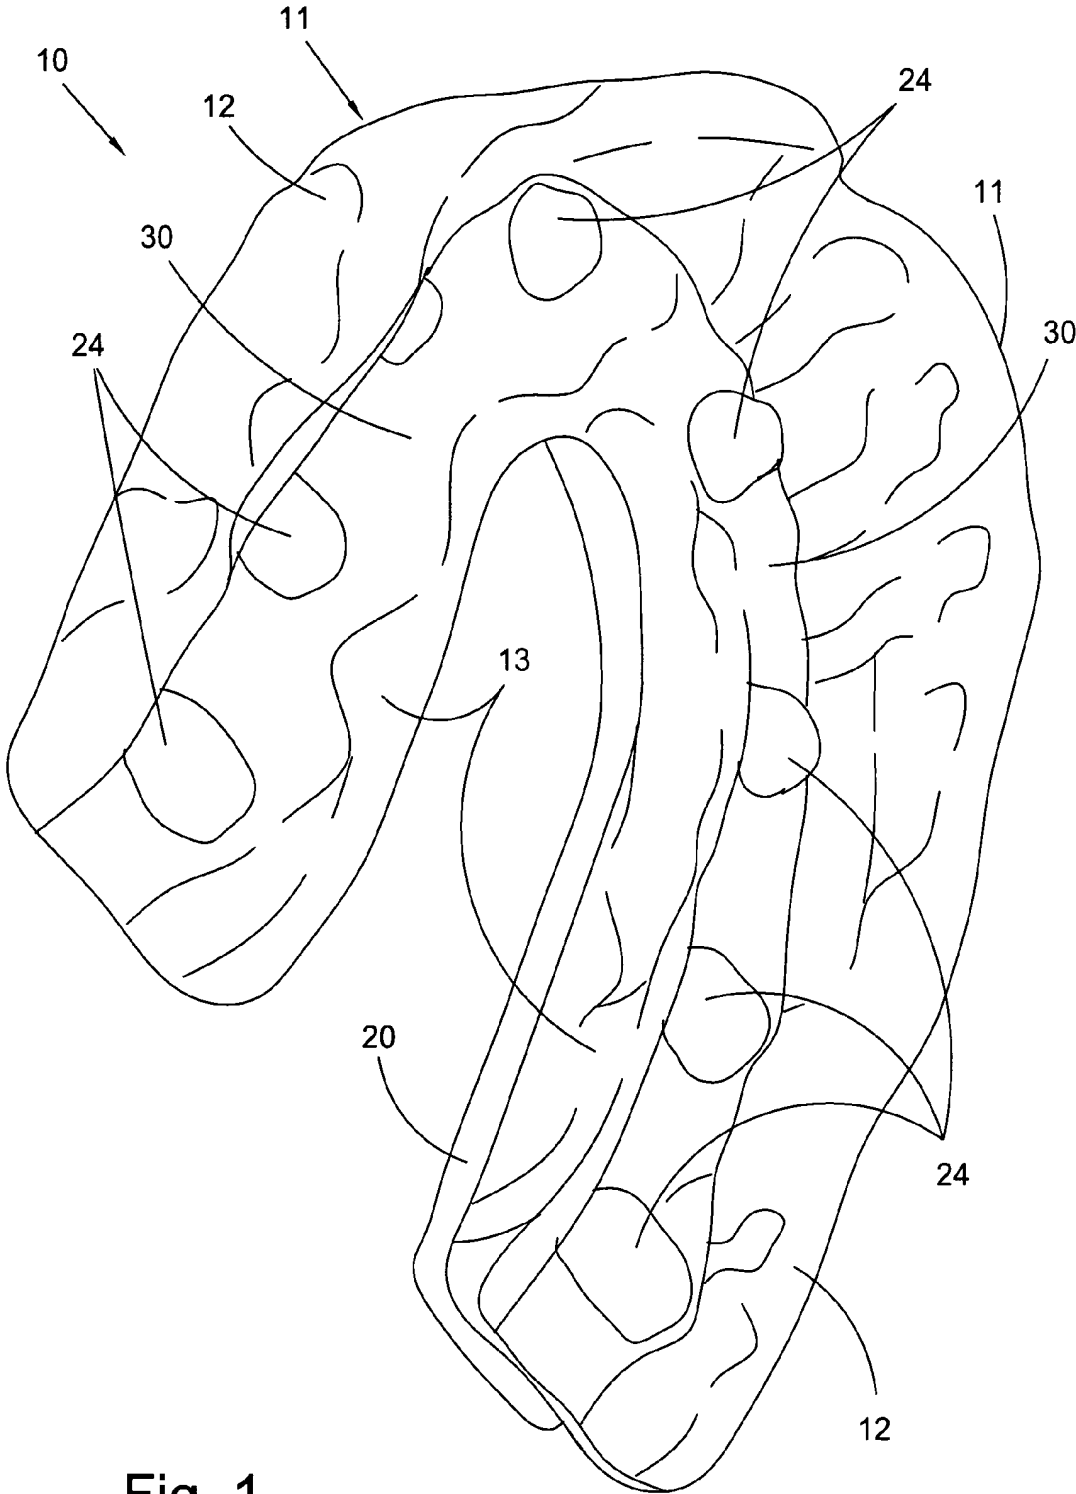


Fig. 1

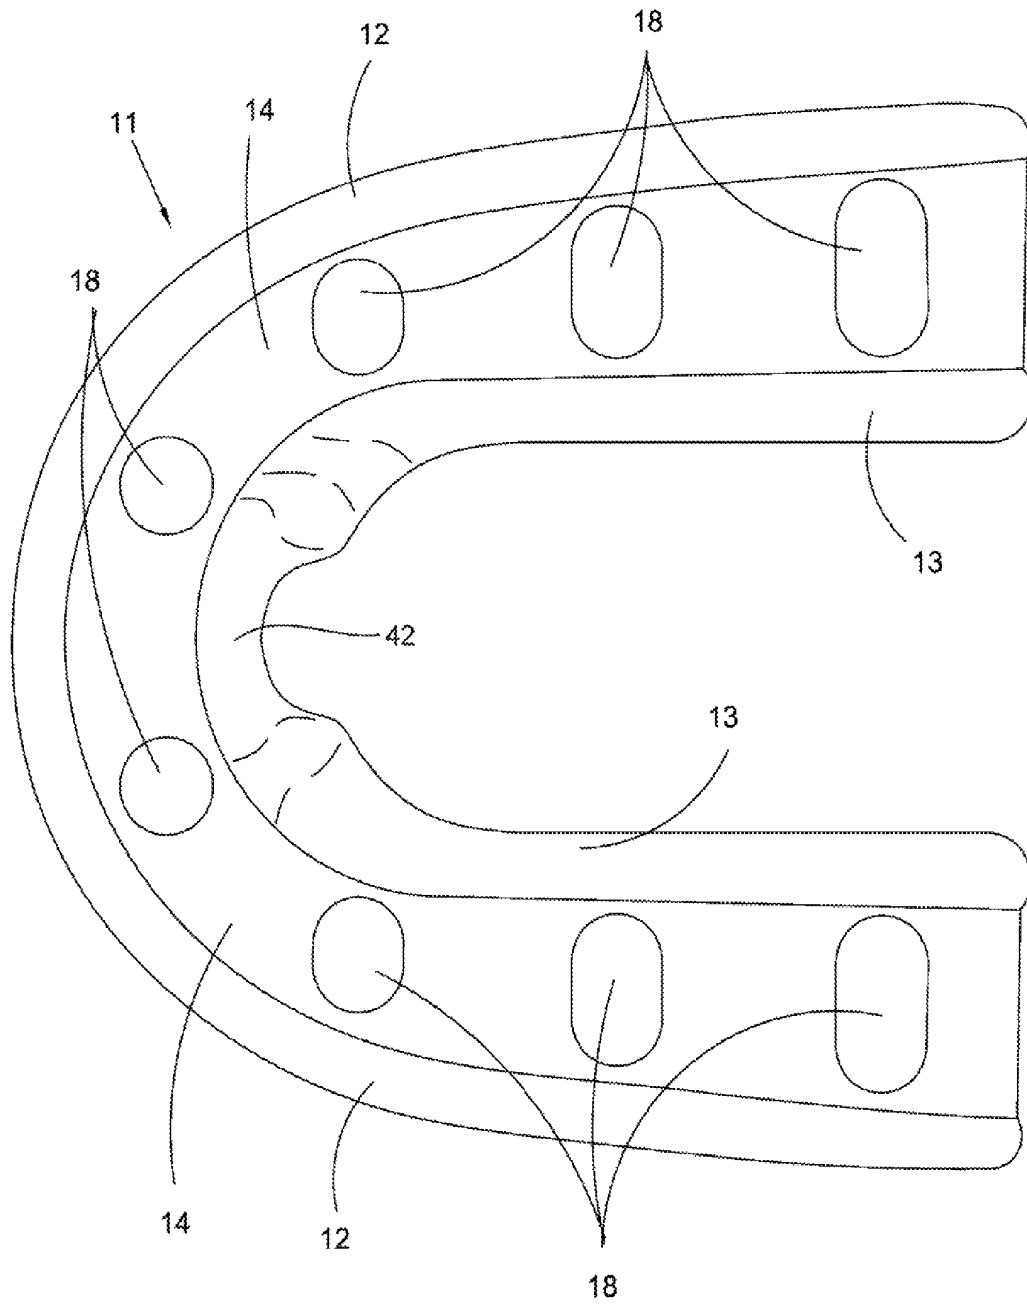


Fig. 2

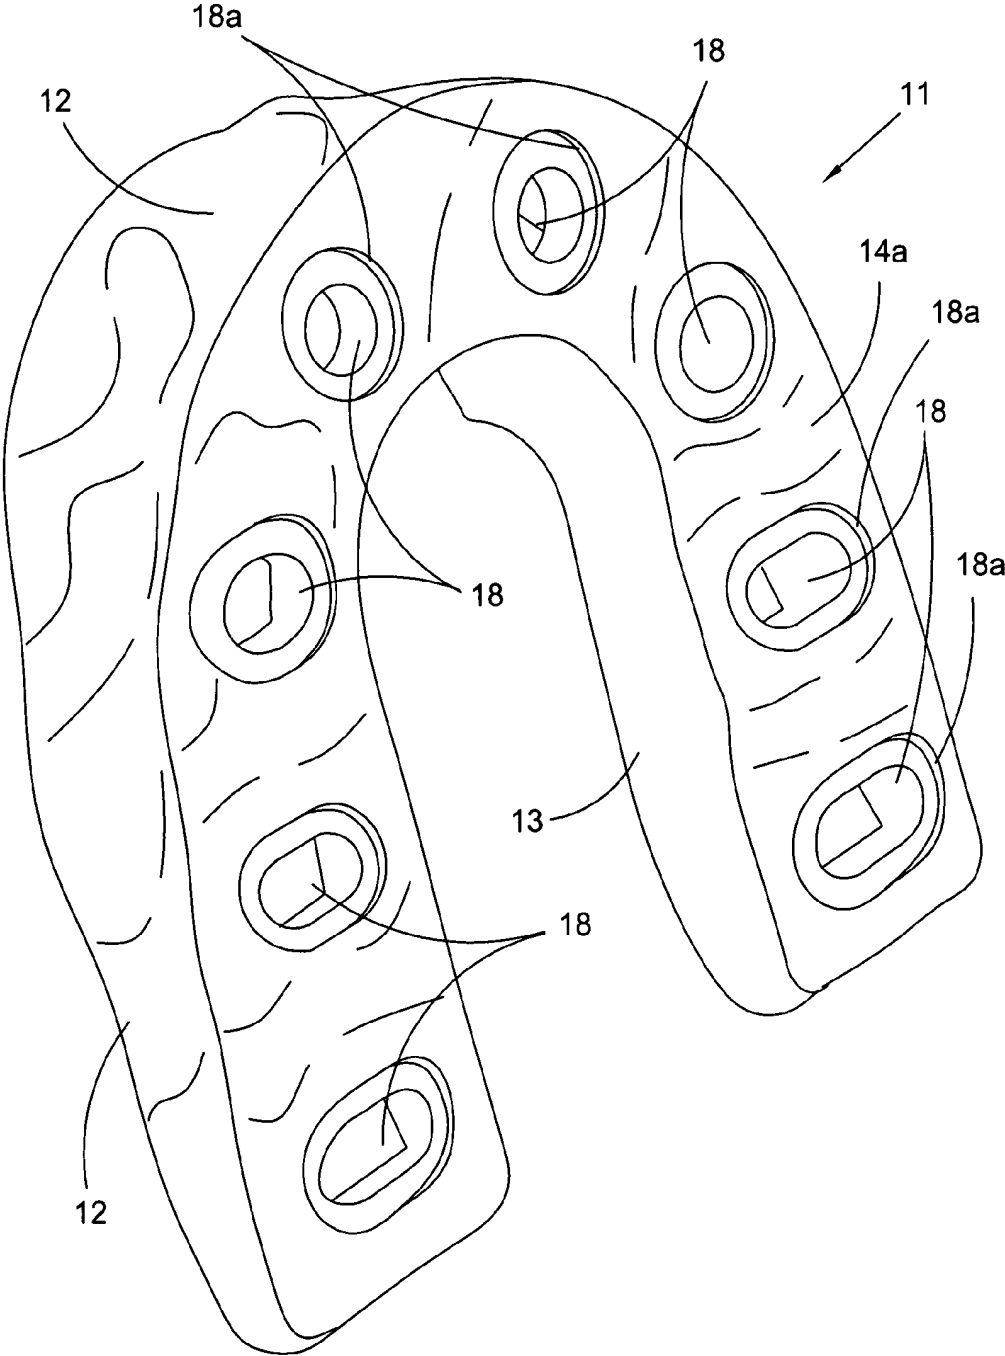


Fig. 3

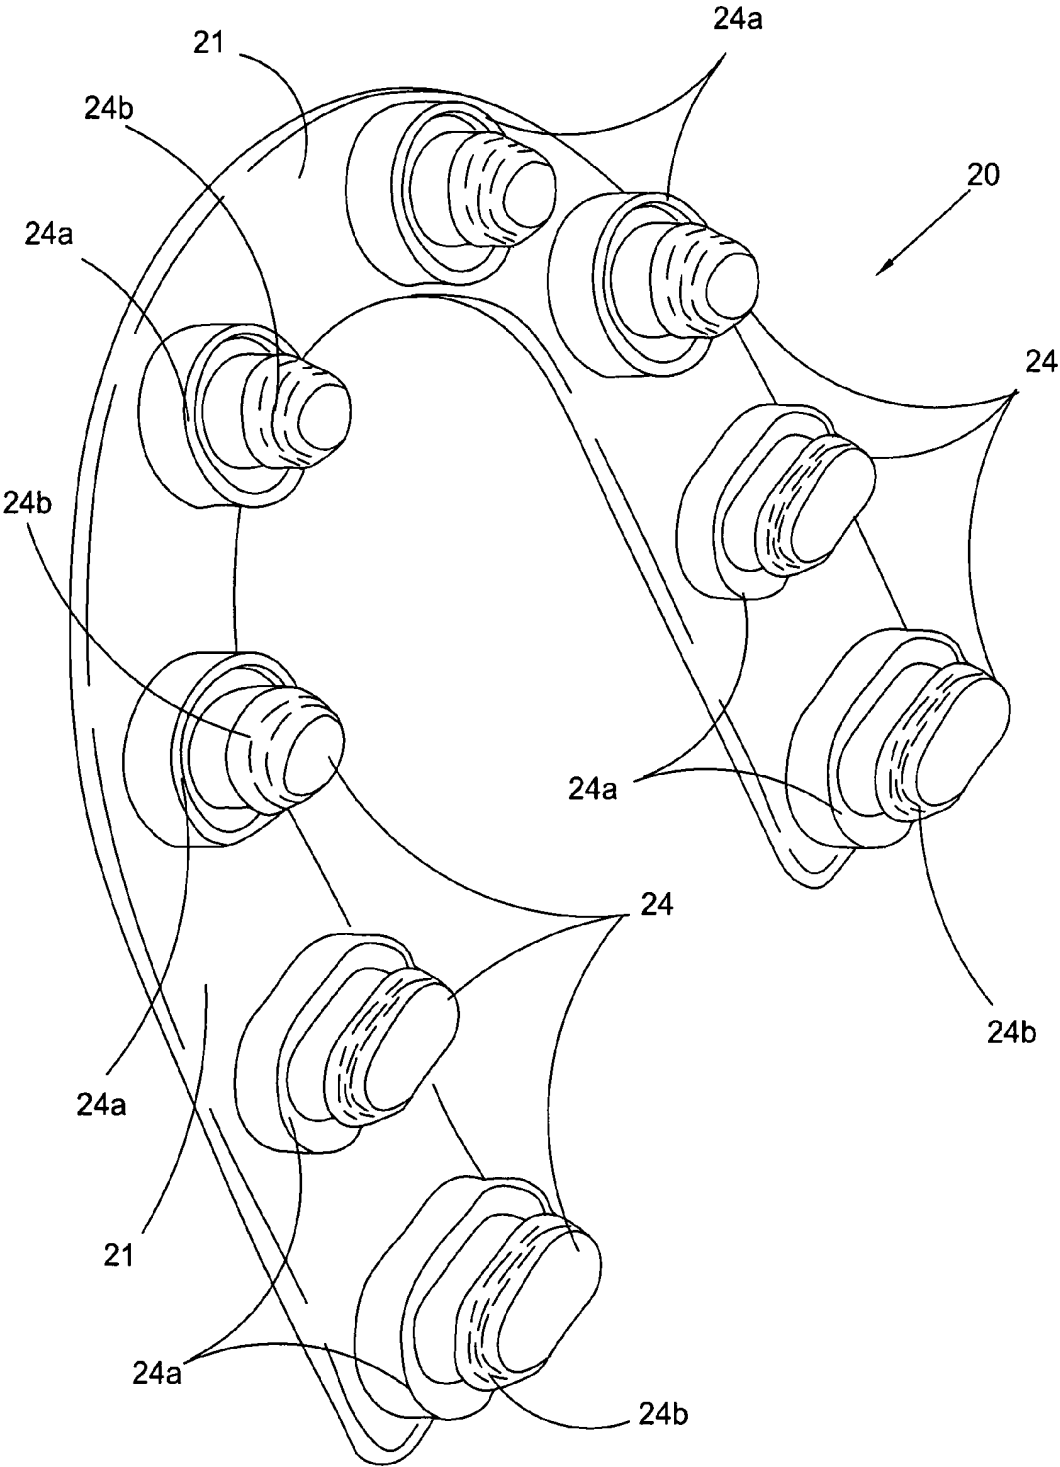


Fig. 4

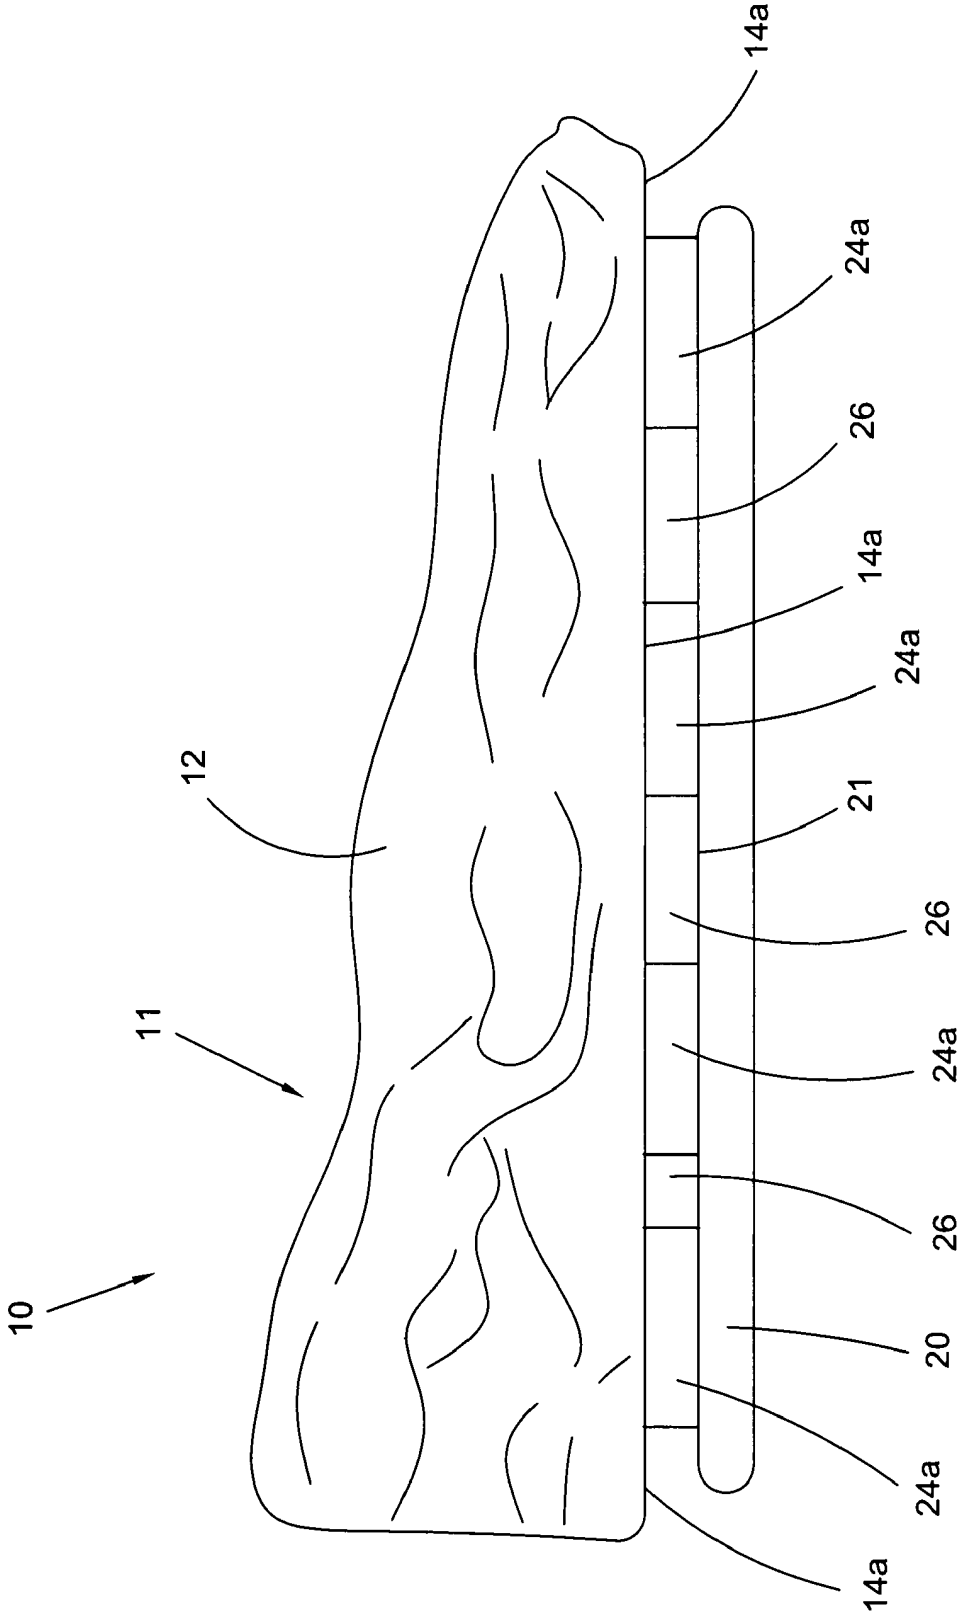


Fig. 5

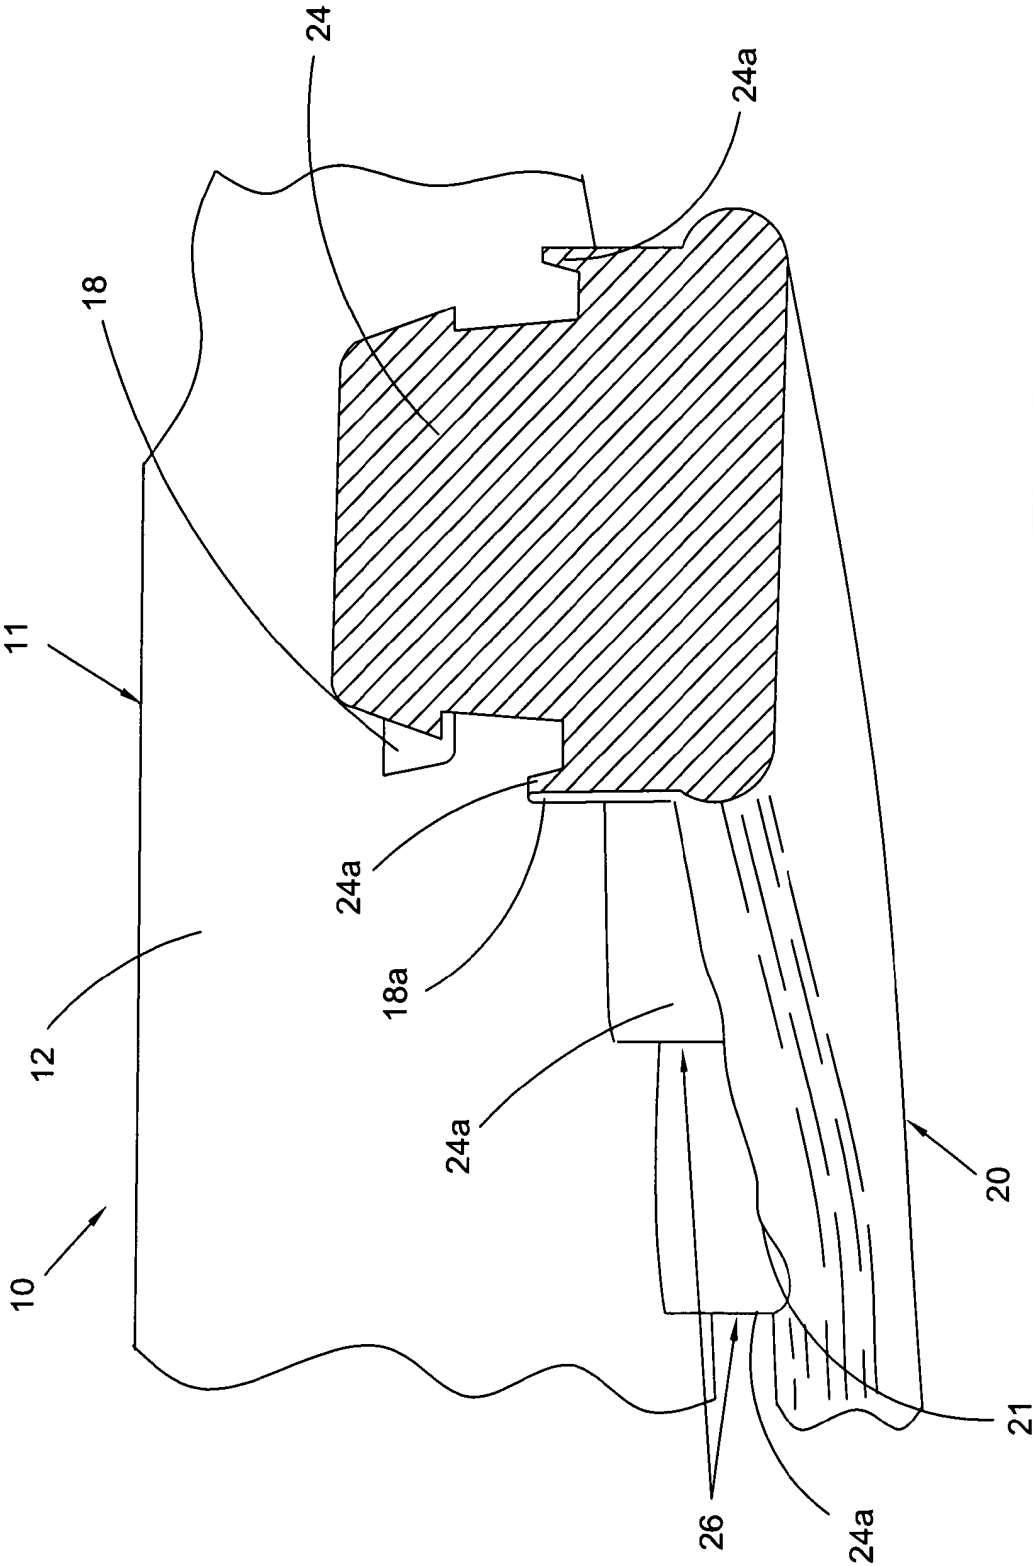


Fig. 6



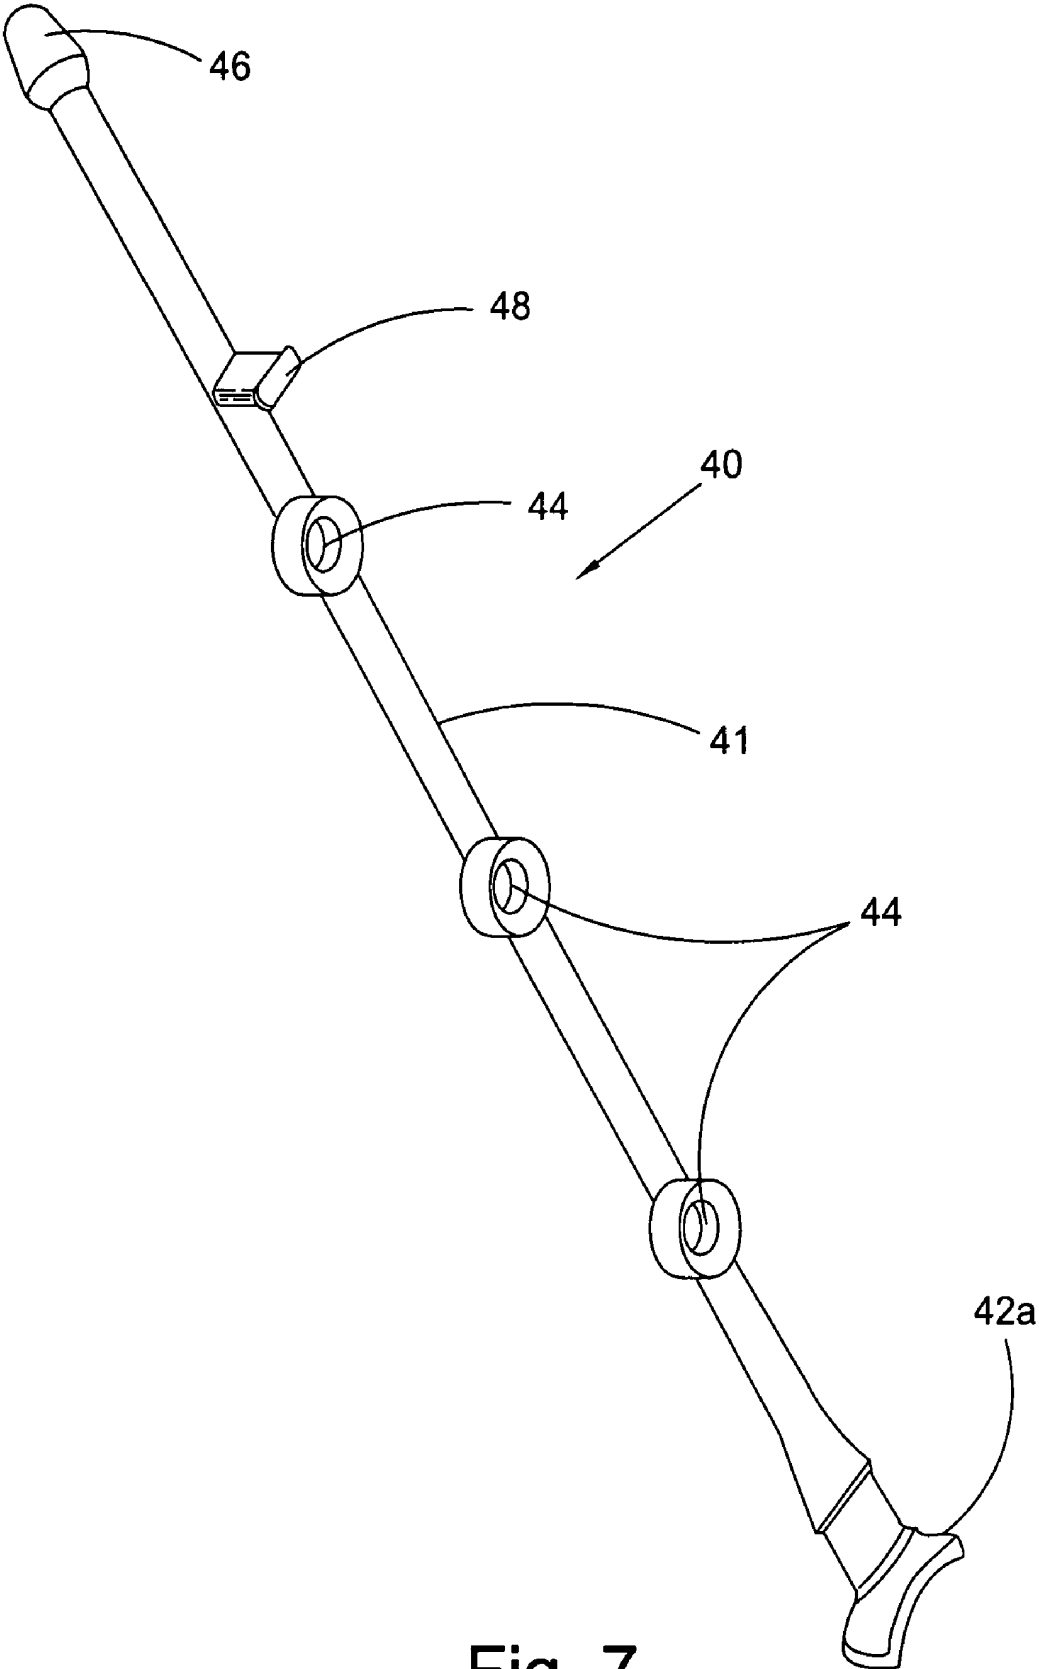


Fig. 7

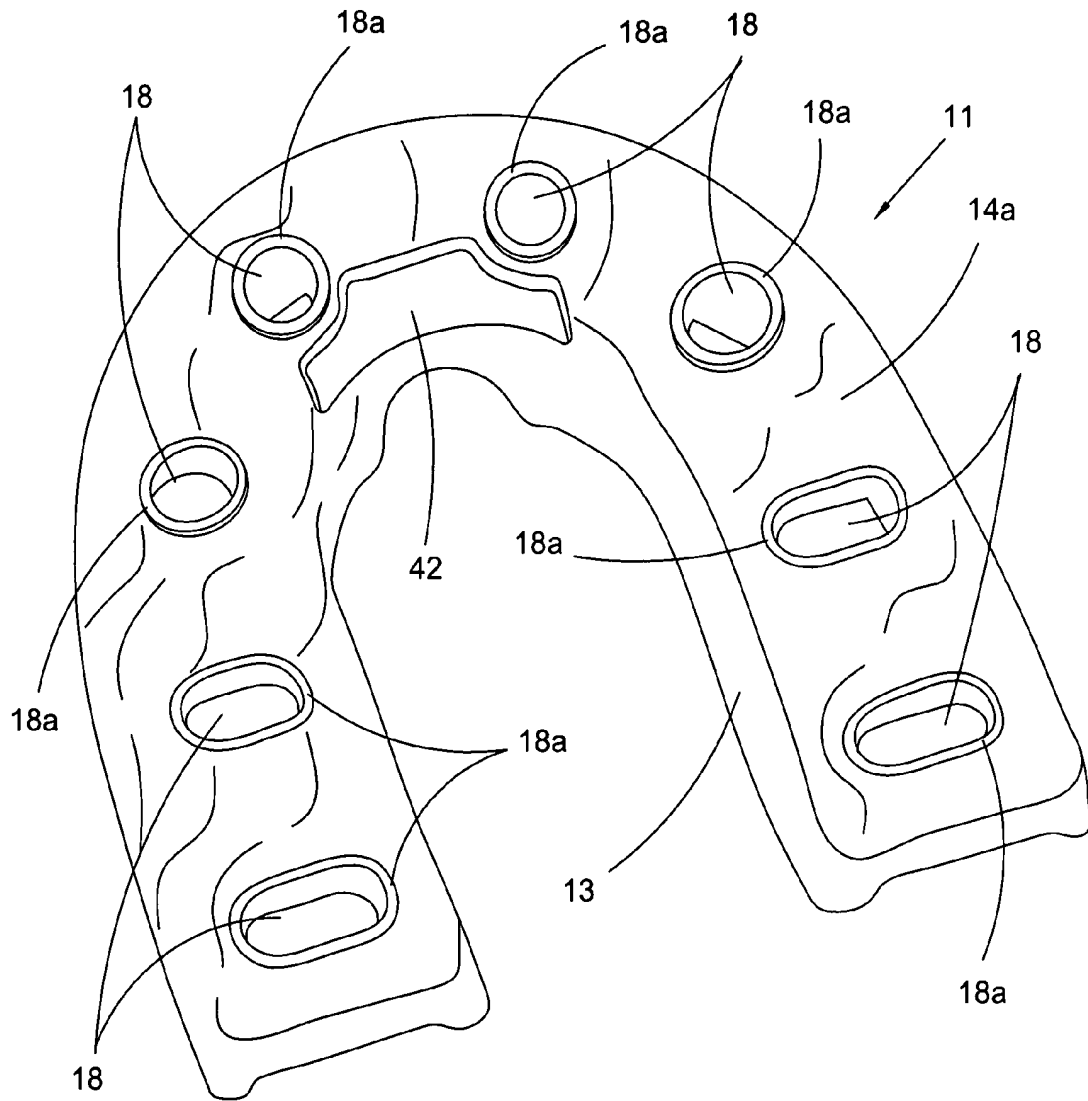


Fig. 8

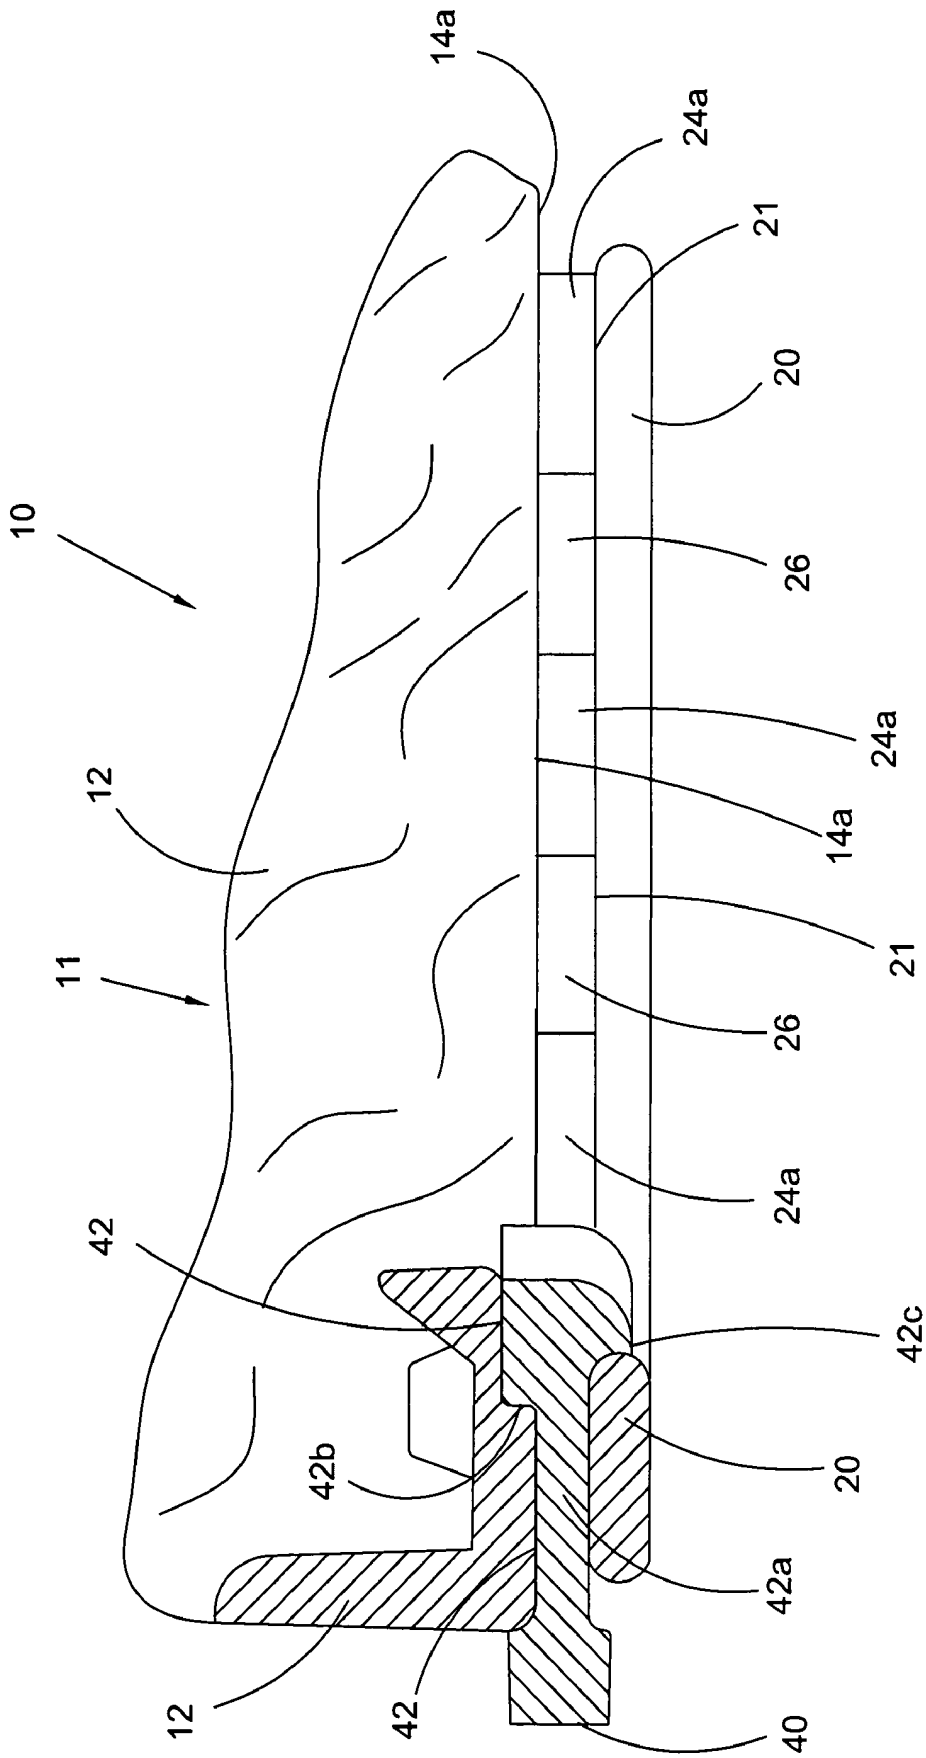


Fig. 9

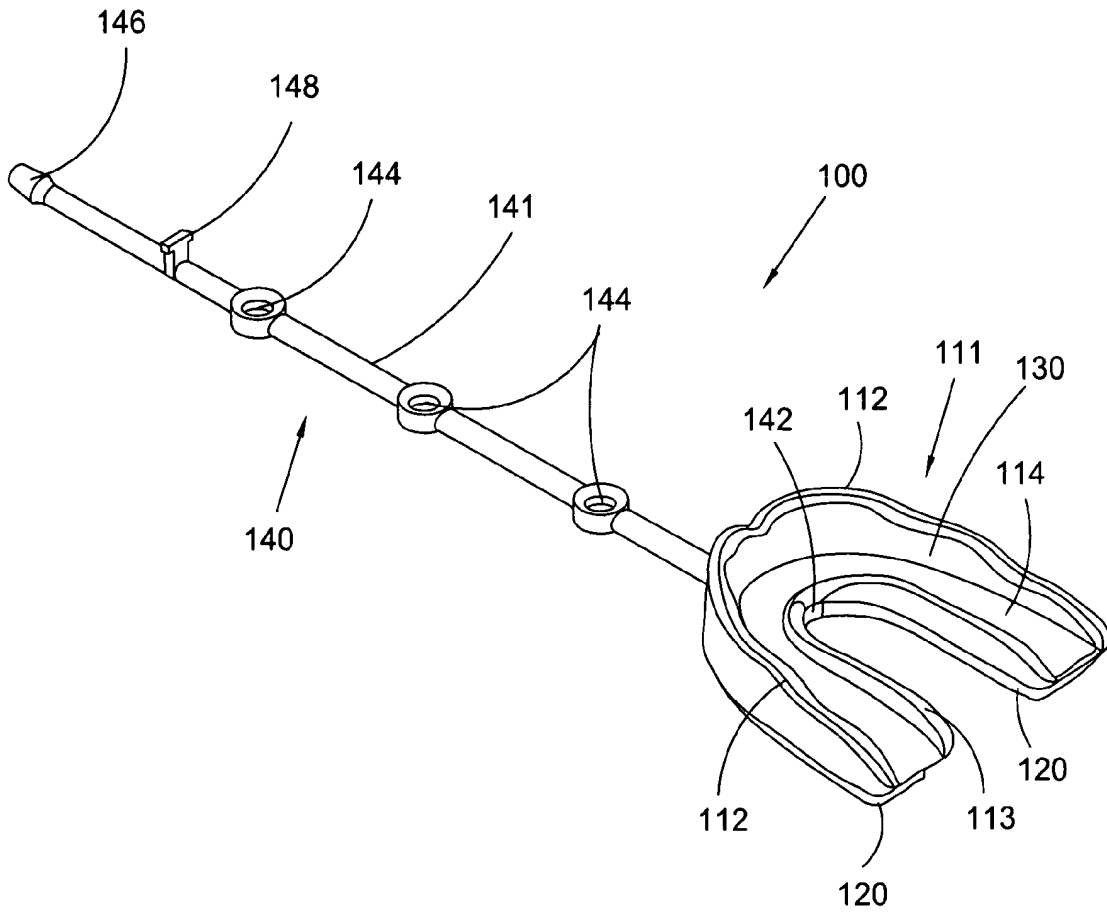


Fig. 10

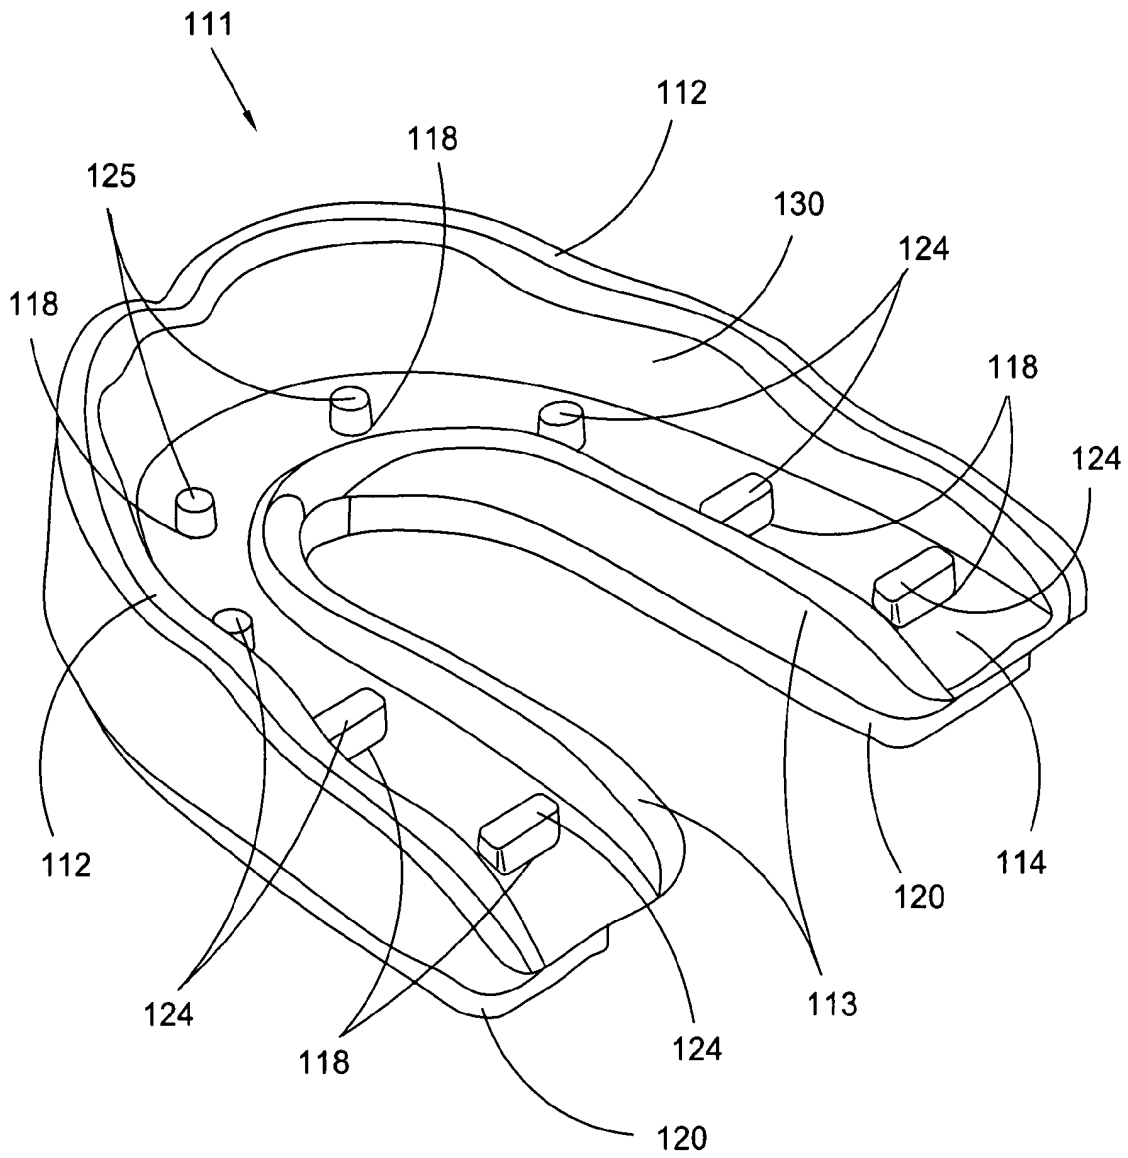


Fig. 11

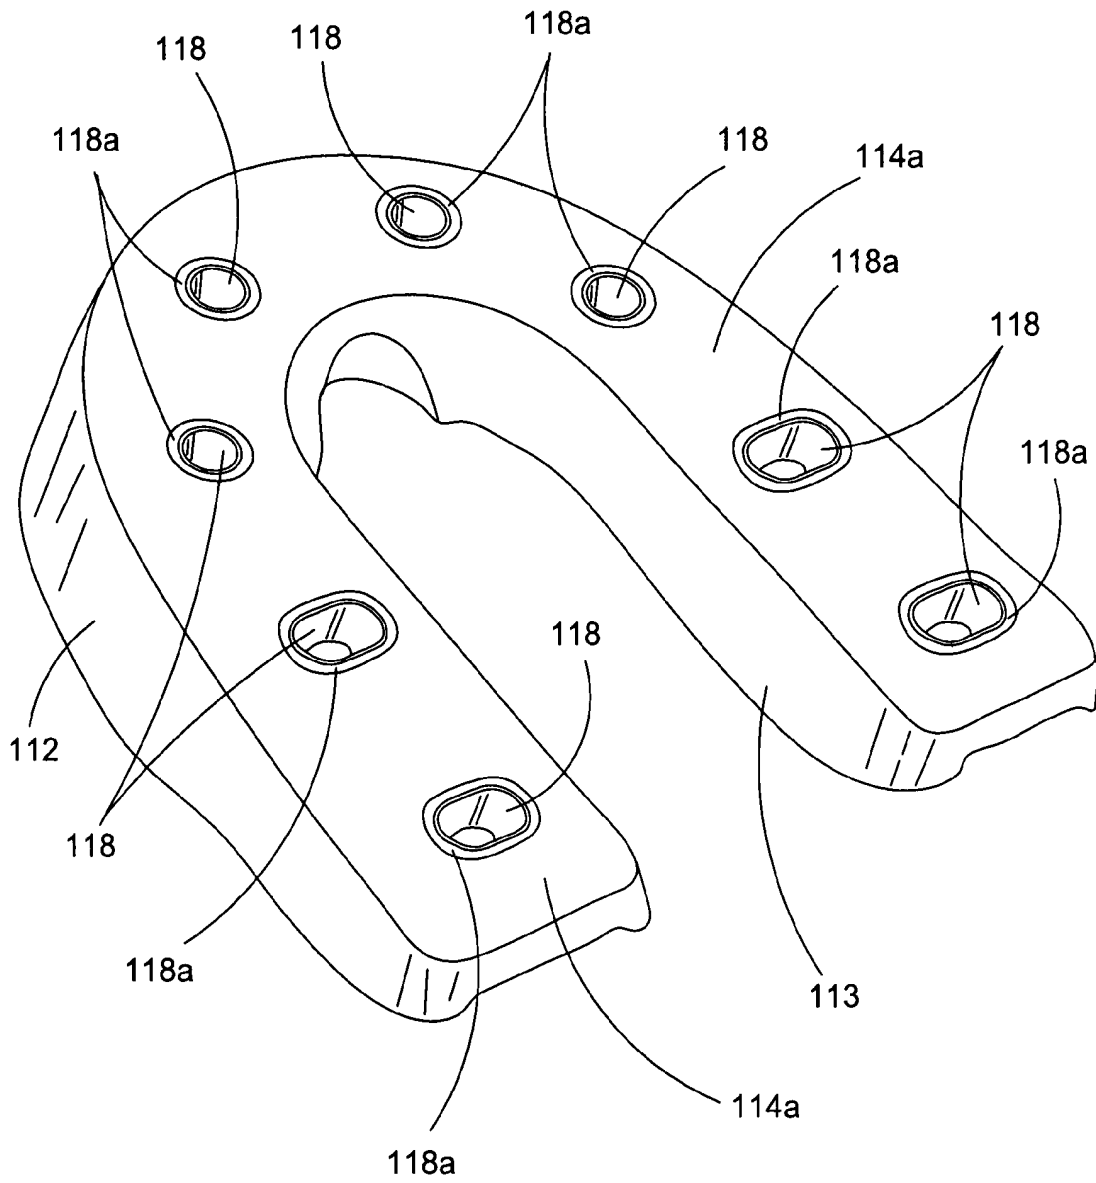


Fig. 12

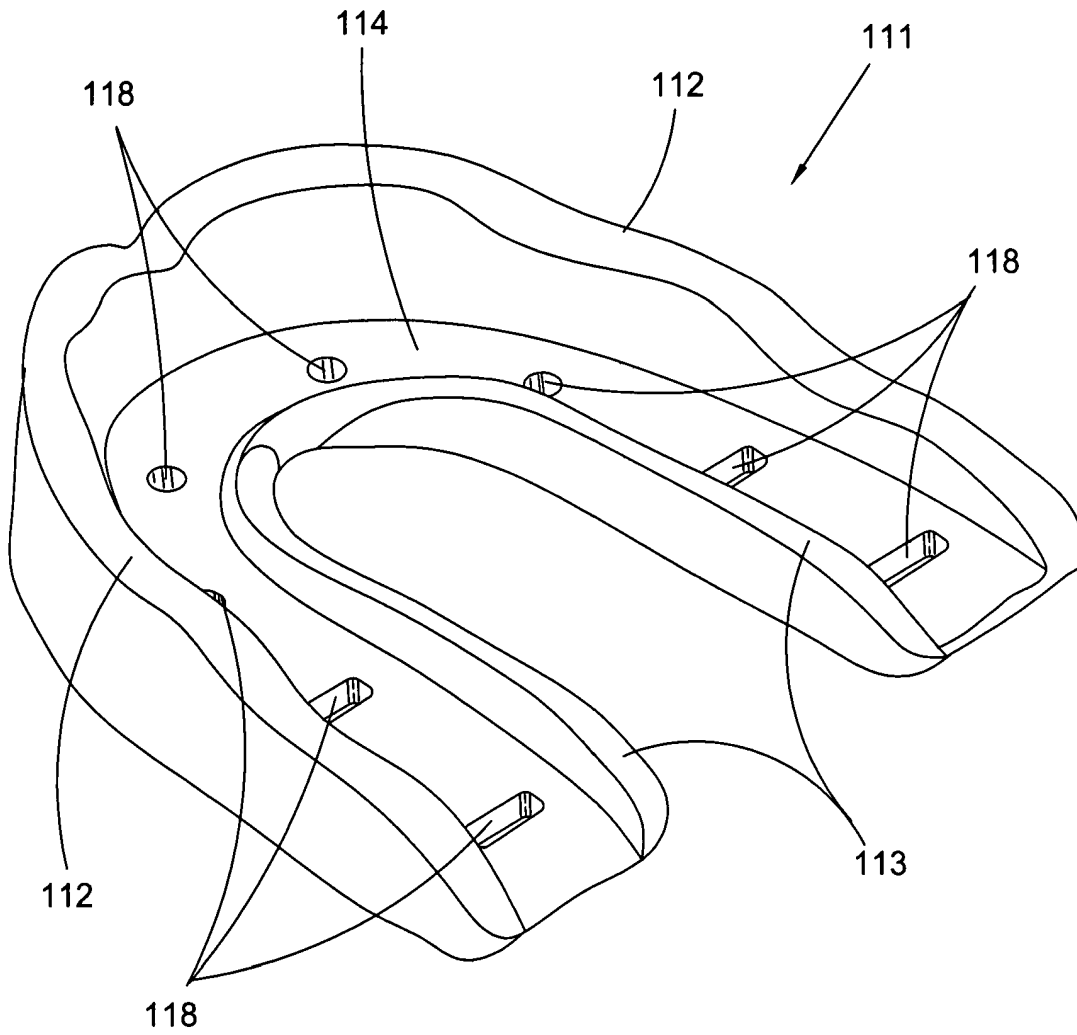


Fig. 13

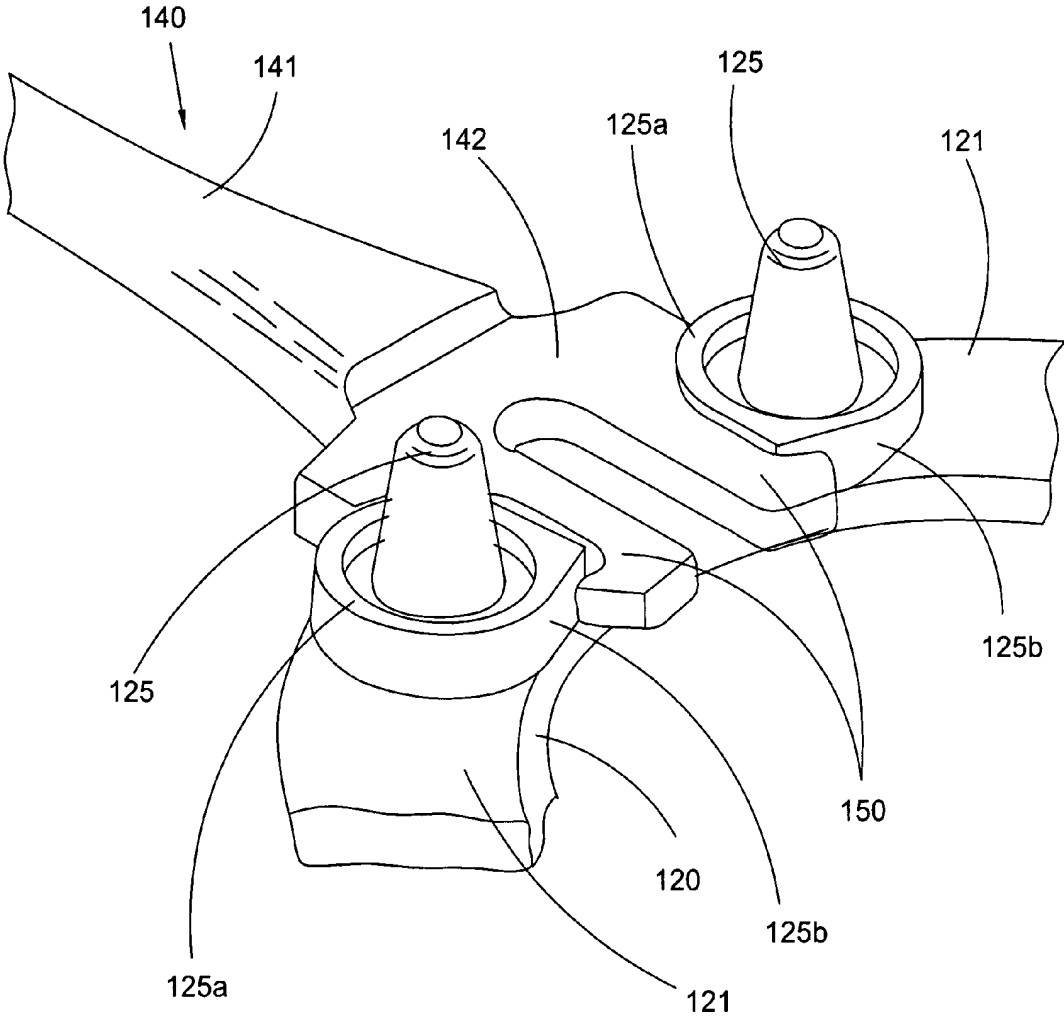


Fig. 14



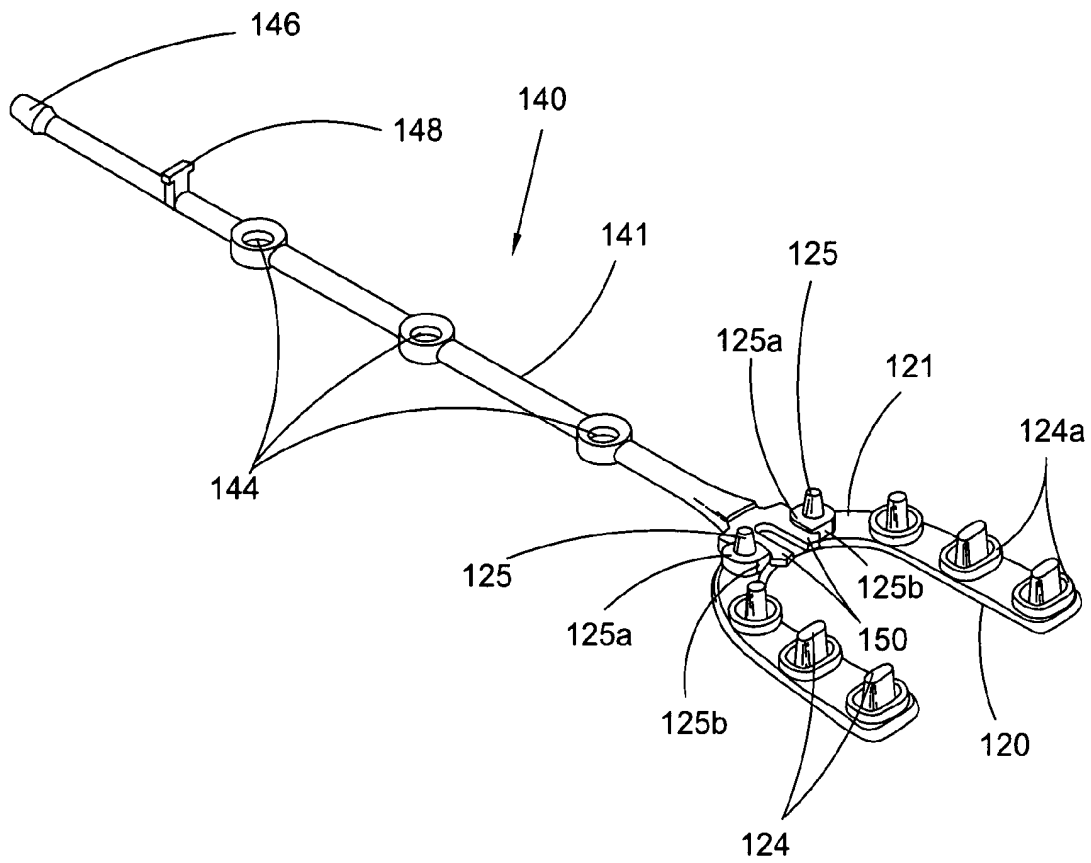


Fig. 15

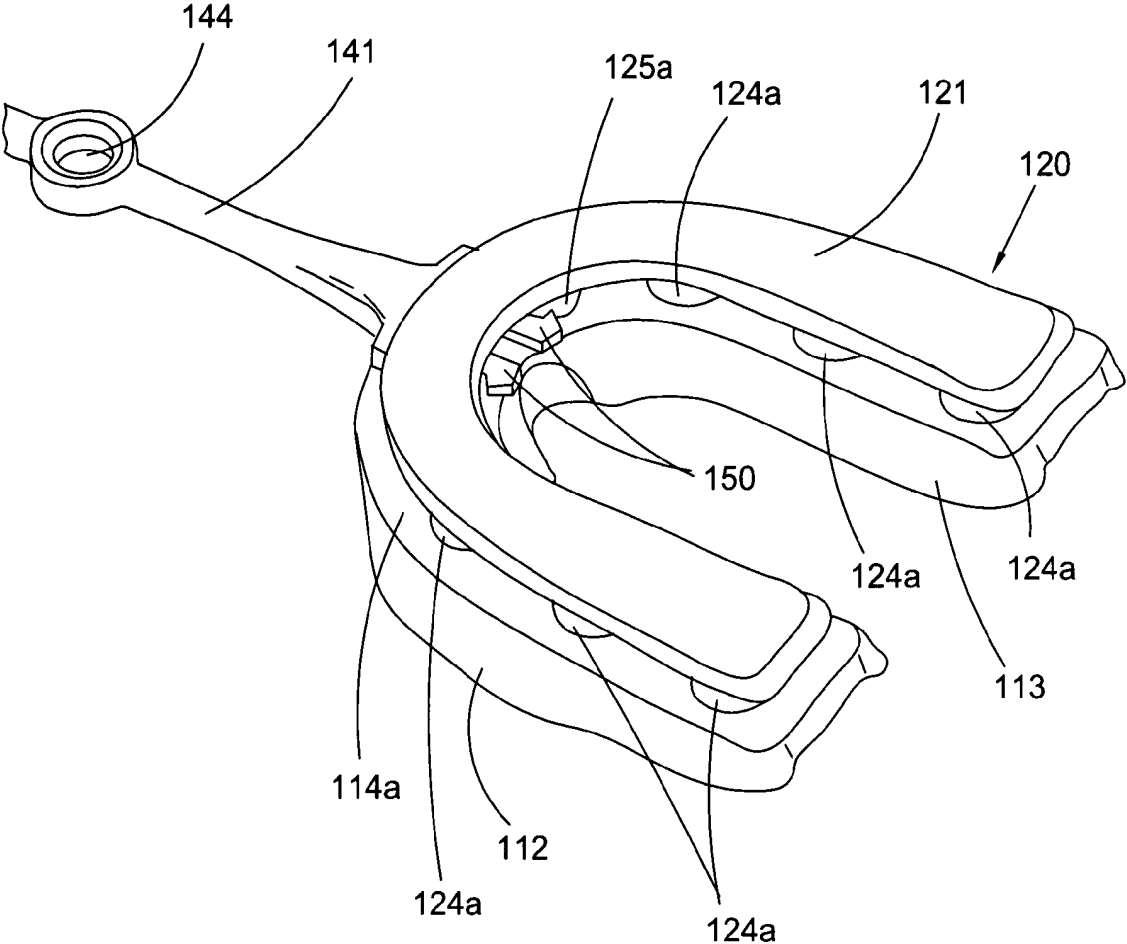


Fig. 16

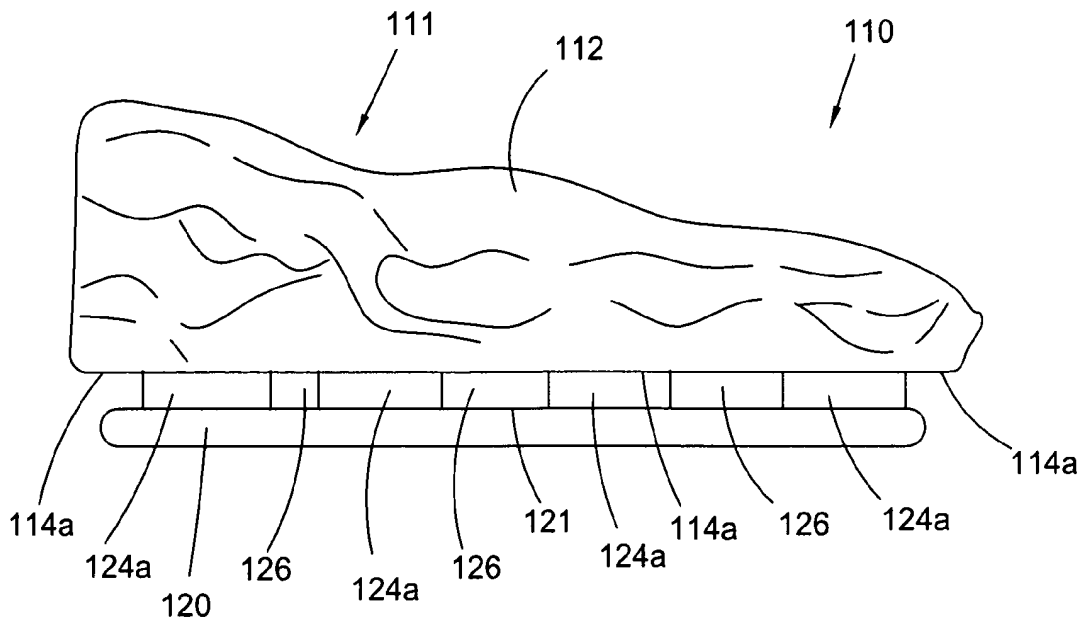


Fig. 17

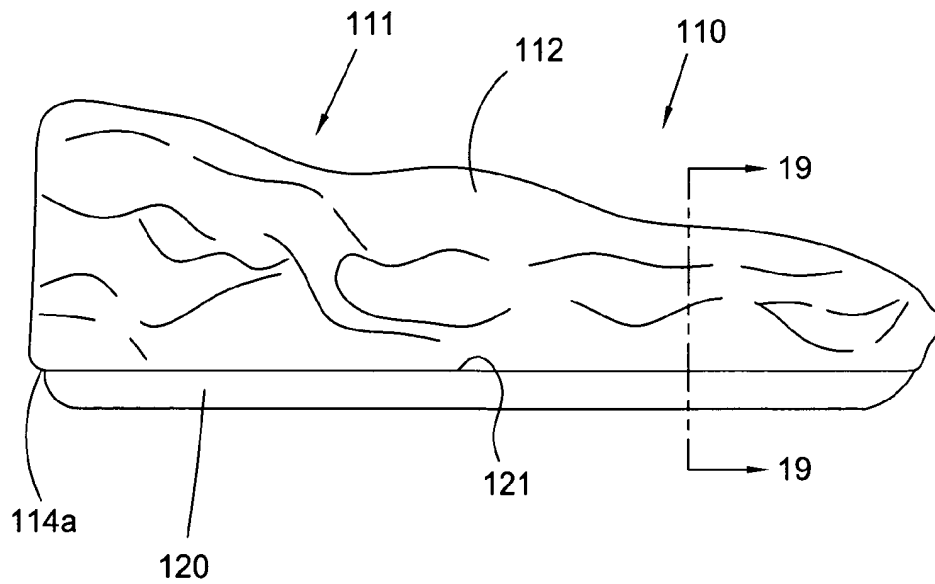


Fig. 18

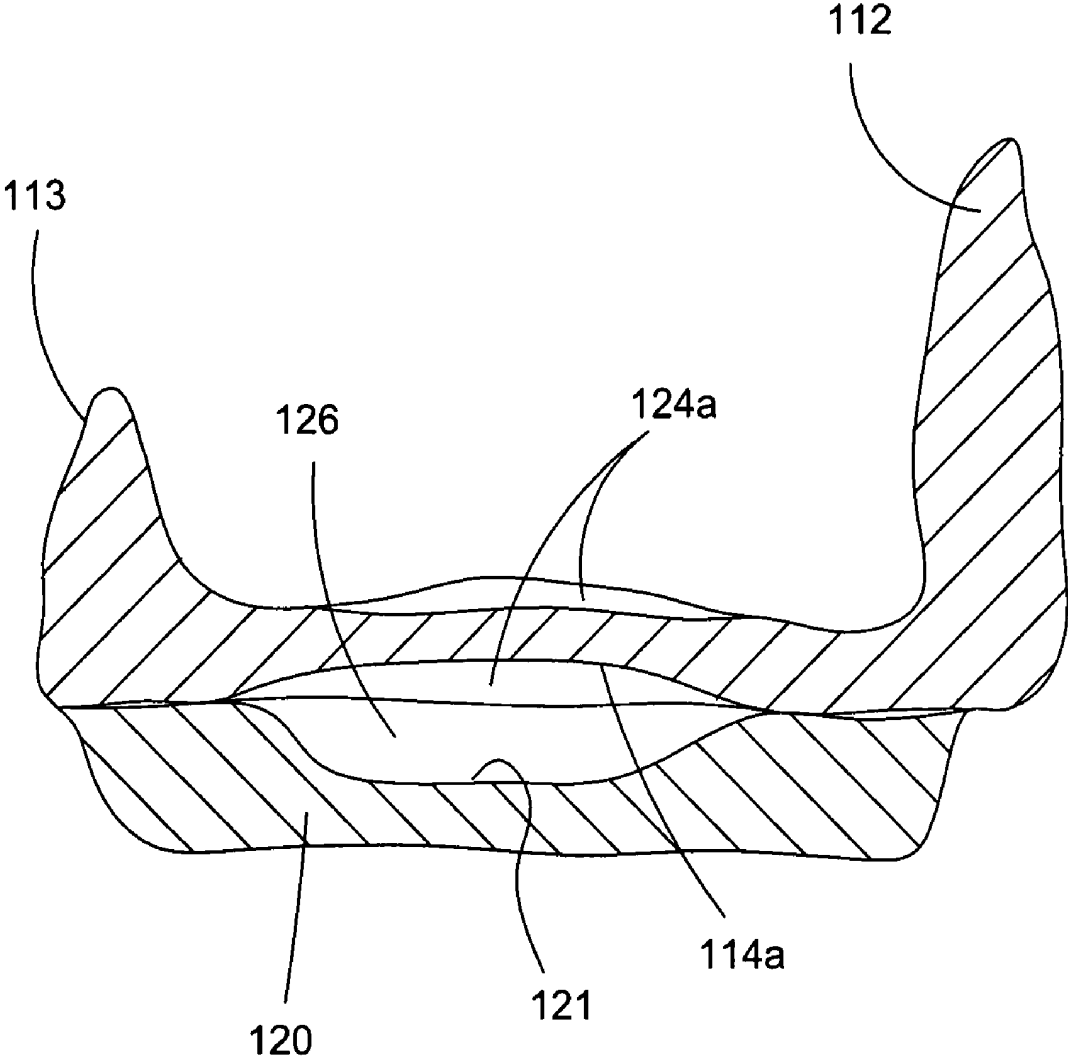


Fig. 19

# 1

## MOUTHGUARD

### FIELD OF THE INVENTION

The present invention relates to the field of safety, more particularly to the prevention and/or reduction of damage caused by impact injuries. More specifically, the invention pertains to the use of mouthguards in the field of oral and dental safety.

### BACKGROUND OF THE INVENTION

Mouthguards are used in a variety of environments to prevent or reduce injuries to the inside of the mouth, teeth, and the jaw by absorbing some or all of the impact of blows to the face and head. The use of mouthguards is especially well known in such sports as football, hockey, boxing and other contact sports in which blows to the face and head are expected. Within the past few years, the use of mouthguards has extended to other sports such as basketball in which accidental blows can occur. Mouthguards can prevent concussions, tissue damage to the mouth, loosening of teeth, and misalignment and dislocations of the temporal-mandibular joint.

Two main factors are important in fabricating a mouthguard. First, the mouthguard must be able to absorb the shock of blows to the head, face, and teeth to prevent the injuries described above. Second, the mouthguard must be comfortable in the user's mouth. These two factors can often be conflicting as harder more rigid materials may absorb blows more effectively but are more uncomfortable when worn as they do not easily conform to the contours of the mouth. Conversely, a softer mouthguard may be more comfortable but less able to absorb blows sufficiently to prevent injuries. In addition, it is important to shape the mouthguard to allow the user to breath easily and without obstruction when playing a particular sport and to enable a user to easily keep the mouthguard in his or her mouth.

Kittelsen, et al. are inventors of a family of patents disclosing a mouthguard in which a nonsoftenable frame is covered by a skin of softenable substance. U.S. Pat. Nos. 6,588,430, 6,691,710, and 6,675,807 all disclose a mouthguard that also includes a detached lower part with projections that fit into aligned holes in the upper portion. The mouthguard is formed by placing it in boiling water to soften and then biting down on the guard. One drawback is that the softenable material is only a skin and thus may not be thick enough to both provide protection from impact and still be comfortable to wear.

Therefore, there remains in the field a need for a mouthguard fabricated from thermoplastic materials that can be softened and molded by the user of the mouthguard.

### SUMMARY OF THE INVENTION

The present invention broadly comprises a mouthguard that comprises an upper portion in the form of a u-shaped channel having an inner wall, an outer wall, and a floor with the floor of the u-shaped channel defining a plurality of holes, a lower u-shaped platform in the form of a u-shaped base having a plurality of posts distributed on the u-shaped base and extending therefrom, and a filler material molded to the inside the u-shaped channel of the upper portion. Each of the plurality of posts is aligned with one of the plurality of holes such that at least a portion of the length of each of the posts extends through the aligned slot or hole when the lower portion is joined with the upper portion. In one embodiment, the mouthguard includes an attachment strap.

# 2

One object of the present invention is to provide a mouthguard having a three layer laminate construction.

A second object of the present invention is to supply a mouthguard that possesses at least one air cushion.

A third object of the present invention is to disclose a mouthguard in which all the materials of construction are softened and become moldable when dipped into heated water.

An additional object of the present invention is to provide a mouthguard that can be formed with or without a fixedly attached strap.

### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

The nature and mode of the operation of the present invention will now be more fully described in the following detailed description of the invention taken with the accompanying drawing Figures, in which:

FIG. 1 is a top perspective of the mouthguard of the present invention;

FIG. 2 is a top view of the upper portion of the mouthguard of the present invention;

FIG. 3 is a bottom perspective view of the upper portion showing the grooves around the perimeter of the holes defined by the floor of the upper portion;

FIG. 4 is a top perspective view of the platform of the mouthguard of the present invention;

FIG. 5 is a side view of the assembled mouthguard of the present invention;

FIG. 6 is a cross section view of a portion of the assembled mouthguard through a post pressed into a hole of the upper portion of the mouthguard;

FIG. 7 is a top perspective view of a strap to be used to attach the mouthguard to a helmet;

FIG. 8 is a bottom perspective view of an alternate embodiment of the upper portion of the mouthguard of the present invention;

FIG. 9 is a cross section view of the alternate embodiment of the mouthguard of the present invention showing the strap attached to the mouthguard between the upper portion and the bottom platform;

FIG. 10 is a top perspective view of an alternate embodiment of the mouthguard of the present invention;

FIG. 11 is a top perspective view of the alternate embodiment of the mouthguard of the present invention showing posts extending from the platform into the u-shaped channel;

FIG. 12 is a bottom perspective view of the bottom surface of the upper portion of the alternate embodiment of the mouthguard;

FIG. 13 is a top perspective view of the upper portion of the alternate embodiment of the mouthguard;

FIG. 14 is a top perspective view of one mode for attaching the strap to the alternate embodiment of the mouthguard;

FIG. 15 is a top perspective of view of the alternate embodiment of the mouthguard of the present invention showing the strap extending from the platform and attached to post undercuts by prongs formed from the strap header;

FIG. 16 is a bottom perspective view of the alternate embodiment of the assembled mouthguard in which the strap is attached to the undercuts surrounding the front posts of the u-shaped platform;

FIG. 17 is a side view of a variation of the alternate embodiment of the mouthguard in which the strap is not attached;

FIG. 18 is a side view of mouthguard 100 after the molding process is performed; and,

3

FIG. 19 is a cross section view of mouthguard 100 taken along 19-19 of FIG. 18 showing an air cushion enclosed within the molded mouthguard.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

At the outset, it should be appreciated that like drawing numbers on different drawing views identify identical structural elements of the invention. It also should be appreciated that figure proportions and angles are not always to scale in order to clearly portray the attributes of the present invention.

While the present invention is described with respect to what is presently considered to be the preferred embodiments, it is understood that the invention is not limited to the disclosed embodiments. The present invention is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

Adverting to the drawings, FIG. 1 is a top perspective view of mouthguard 10 of the present invention. FIG. 1 depicts mouthguard 10 in an assembled condition without an attachment strap. Upper portion 11 is a u-shaped channel that includes outer wall 12 and inner wall 13 connected to floor 14 (not seen in FIG. 1) on the outer perimeter and inner perimeter, respectively, to form an integral unit. Walls 12 and 13 may each extend as one continuous wall around floor 14 or may each comprise two or more walls distributed around floor 14. Preferably, walls 12 and 13 and floor 14 are joined into an integral unit during a suitable molding process. Such molding processes are well known to those with skill in the art.

Mouthguard 10 also comprises lower u-shaped platform 20 seen attached to the bottom of upper portion 11. At least part of the length of posts 24 extends through holes 18 (not seen in FIG. 1). Filler material 30 is molded into the inside of upper portion 11. Filler 30, upper portion 11, and platform 20 together form a three layer laminate device.

FIG. 2 is a top view of upper portion 11 of mouthguard 10 before assembly with platform 20 and before addition of filler material 30. U-shaped floor 14 is seen extending the length of upper portion 11. Floor 14 is flanked on either side by outer wall 12 and inner wall 13. In the embodiment shown, inner wall 13 comprises two walls that extend from the end of each leg of the "U" and taper toward floor 14 near the start of the curve of the u shape. As explained below, in one embodiment, a groove between each of inner walls 13 forms part of a header orifice. As explained below, groove 42 is configured to receive strap 40 when mouthguard 10 is finally assembled. In an alternate embodiment, inner wall 13 may extend as a single wall around the inner perimeter of floor 14 with groove 42 absent from floor 14. Holes 18 are defined by floor 14.

FIG. 3 is a bottom perspective view of upper portion 11. Holes 18 extend through floor 14. In a preferred embodiment, at least one perimeter groove 18a is formed into bottom surface 14a to surround the perimeter of each hole 18. In the embodiment shown, holes 18 are shaped into round orifices or oval shaped slots and grooves 18a are around each hole 18.

FIG. 4 is a top perspective view of platform 20. Platform 20 is also u-shaped similar to upper portion 11. U-shaped base 21 supports a plurality of posts 24 distributed around base 21. It is readily seen that posts 24 are shaped to fit into a corresponding hole 18 in upper portion 11 as described below. In a preferred embodiment, the upper ends 24b of posts 24 are tapered, while the bottom portion is substantially straight. More preferably, undercuts 24a are in direct contact with platform 20 and extend from platform 20 to surround posts 24 and are sized and shaped to fit into grooves 18a on the underside of upper portion 11. As seen in FIG. 4, each of the

4

undercuts 24a is shorter than the post 24 that it surrounds as measured from the u-shaped base 21. This is also seen in FIG. 6 which shows the top of post 24 as higher than the top of undercut 24a as measured from u-shaped base 21.

FIG. 5 is a side view of assembled mouthguard 10. Undercuts 24a are seen extending from base 21 to bottom surface 14a of upper portion 11. In the embodiment shown, each of posts 24 is aligned with one of holes 18. The assembly of mouthguard 10 is performed by pressing posts 24 of platform 20 into holes 18 of upper portion 11. Preferably, the shape of each post 24 conforms to the shape of corresponding (aligned) hole 18. For example, as seen in FIGS. 2-4, the round posts 24 are pressed into round orifices 18, while oval posts 24 are pressed into oval slots 18. While mouthguard 10 may be formed using posts 24 without undercuts 24a, preferably undercuts 24a are shaped to fit into corresponding grooves 18a. When pressed together, platform 20 is attached to upper portion 11. FIG. 6 is a cross section through a post 24 pressed into hole 18 with undercut 24a fitting into groove 18a.

Also seen in FIG. 5 is the plurality of gaps 26 formed between undercuts 24a or, alternatively, posts 24. Each gap 26 is defined by bottom surface 14a, base 21, and two succeeding undercuts 24a or posts 24. By succeeding is meant posts 24 or undercuts 24a that follow immediately in sequence in distribution around platform 20. Gaps 26 act as air cushions between upper portion 11 and platform 20 that help to dissipate and lessen the force of a blow to the head or face.

FIG. 7 is a top perspective view of strap 40. As described below, in an alternate embodiment, strap 40 is attached to mouthguard 10 to enable mouthguard 10 to be easily accessible to the user by attaching it to a helmet such as a football helmet or lacrosse helmet. Header 42a is positioned at one end of strap 40. Leader 46 is at the end opposite of header 42a. Strap 40 defines a plurality of strap holes 44. In one embodiment of strap 40, lug 48 is positioned on strap 40 to be removably pressed into one of receiving holes 44 when the strap is folded for packaging. Strap 40 may be attached to helmet by wrapping it around a helmet face mask and inserting leader 46 into one of strap holes 44.

In one embodiment of mouthguard 10, header 42a fits into groove 42 on platform 20. When platform 20 is pressed together with upper portion 11, head 42a is trapped or wedged between upper portion 11 and platform 20 thereby attaching strap 40 to mouthguard 10. When the strap-mouthguard assembly is placed in boiling or near boiling water, as described below, strap 40 becomes fixedly attached to mouthguard 10 after the user bites down on the softened mouthguard.

FIG. 8 is a bottom perspective view of an alternate embodiment of upper portion 11. Groove 42 is formed at the bottom of the curve of the u-shaped upper portion. Most preferably, the outline of groove 42 possesses the same shape and size as header 42a of strap 40 to allow for a snug fit of header 42a into groove 42.

FIG. 9 is a cross section view of the alternate embodiment of mouthguard 10 showing strap 40 attached to mouthguard 10. Header 42a is seen positioned in groove 42 and pressed between wall 12 and platform 20. Shoulders 42b and 42c rest against complementary shoulders in header orifice 42 and platform 20 to hold header 42a in place.

To assemble mouthguard 10 and customize it to a particular user's mouth cavity, holes 18 of upper portion 11 and posts 24 of platform 20 are aligned and the two pieces are pressed together so that at least part of the length of each of posts 24 extends through holes 18 and, in a preferred embodiment, undercuts 24a fit snugly into grooves 18a. Assembled mouthguard 10 is then dipped into hot water. Preferably, the water is

5

brought to a boil after which the heat is removed from the water for about 30 seconds. Assembled mouthguard **10** is then held in the “near boiling” water for about 30 seconds. After shaking off the excess water, the user bites into the mouthguard. Because the boiling water presoftens mouthguard **10**, it will form around the wearer’s particular upper jaw and bite configuration. In addition, the wearer may suck on mouthguard **10** while biting to remove air from the softened material.

In shaping the embodiment that includes strap **40**, upper portion **11** and platform **20** are pressed together as described above. Before placing assembled mouthguard **10** into the boiling or near boiling water, strap **40** is inserted through groove **42** from the inside of the curve of the u-shaped mouthguard **10** so that header **42a** rests in groove **42** and leader **46** extends from mouthguard **10**. Using strap **40** as a handle, mouthguard **10** is dipped into the boiling or near boiling water for about 30 seconds. Excess water is then shaken off after which the wearer bites down on the softened mouthguard **10** to form it into the shape of the wearer’s mouth. Because header **42a** is softened with upper portion **11** and platform **20**, upper portion **11** and platform **20** are molded around header **42a** to fixedly or permanently attach strap **40** to mouthguard **10**.

FIG. **10** is a top perspective view of a second embodiment **100** of the mouthguard of the present invention. Upper portion **111** is seen attached to strap **140**. Upper portion **111** is formed into a u-shaped channel including outer wall **112**, inner wall **113**, and floor **114**. Filler material **130** covers floor **114** and posts **124** (not seen in FIG. **10**). Filler material **130** is molded into the inside of upper portion **111**. Filler **130**, upper portion **111**, and platform **120** together form a three layer laminate device. In some embodiments, posts **124** will be visible through filler **130** depending on the filler material used. As explained below, platform **120** is attached to upper portion **111** in a manner similar to assembled mouthguard **10**. A portion of strap header **142** is seen at the curve portion of mouthguard **100**.

FIG. **11** is a top perspective view of mouthguard **100** showing posts **124** extending from platform **120** through holes **118** into the u-shaped channel as seen through filler **130**. As described below, posts **125**, positioned in the front of mouthguard **100** at the curve of the u-shaped platform **120**, are specifically shaped to receive header **142**.

FIG. **12** is a bottom perspective view of the bottom of upper portion **111**. Similar to mouthguard **10** discussed above, bottom surface **114a** of floor **114** defines holes **118**. Grooves **118a** surround the perimeter of holes **118**. FIG. **13** is a top perspective view of upper portion **111** of mouthguard **100**. Similar to holes **18** of mouthguard **10**, holes **118** are preferably shaped to receive posts **124** having a complementary shape in order to create a snug fit when platform **120** is joined to upper portion **111**.

FIG. **14** is a top perspective view of an alternate mode for attaching strap **140** to mouthguard **100**. Header **142** includes two prongs **150** shaped to fit closely around undercuts **125a** that each surround posts **125**. Preferably, undercuts **125a** are shaped so that prongs **150** are attached by snapping them into position to form a tight fit. For example, as seen in FIG. **14**, undercuts **125a** include a flat facing **125b** shaped to conform to the shape of prongs **150**. In an alternate embodiment, prongs **150** may be configured or sized to be about as thick as undercuts **124a** surrounding posts **124** on platform **120** and may be attached directly to posts **125**. The added thickness would enable prongs **150** to act similar to undercuts **124a** to form gaps or air cushions **126** (not seen in FIG. **14**). FIG. **15** is a top perspective view of mouthguard **100** showing strap

6

**140** extending from platform **120** and attached to undercuts **125a** by prongs **150**. It will be recognized by those skilled in the art that other attachment designs may be used to attach strap **140** to posts **125** and/or undercuts **125a**.

FIG. **16** is a bottom perspective view of assembled mouthguard **100** in which strap **140** is attached to undercuts **125a** using prongs **150**. Platform **120** is attached to upper portion **111** similar to mouthguard **10** in that posts **124** and **125** are pushed through holes **118** in upper portion **111**. In the preferred embodiment shown, undercuts **124a** and **125a** fit into one or more of grooves **118a**. Prongs **150** of strap header **142** are fit next to or around undercuts **125a** and held in place by a snap-fit or other suitable attachment method. By snap-fit is meant that prongs **150** and/or posts **125** or undercuts **125a** are sized to require a slight flexion to fit prong **150** around an undercut or post. After placing it around a post or undercut, prong **150** will attempt to flex back to its original shape, thereby forcing a tight fit with either post **125** or undercut **125a**. FIG. **17** is a side view of another embodiment of mouthguard **100** in which strap **140** is not attached. Similar to mouthguard **10** discussed above, mouthguard **100** may be assembled and molded with or without strap **140**. In both modes, assembled mouthguard **100** includes gaps **126** between undercuts **124a** and/or undercuts **125a**. Similar to mouthguard **10**, gaps (air cushions) **126** are defined by undercuts **124a** and/or **125a** (not seen in FIG. **17**), platform base **121**, and undersurface **114a**. In a different embodiment, posts **124** and/or **125** may replace undercuts **124a** and/or **125a**.

A method similar, if not identical, the assembly and molding method for mouthguard **10** is used to shape mouthguard **100**. As with mouthguard, the same method is used when strap **140** is attached to front undercuts **125a**. Upper portion **111** and platform **120** are pressed together as described above with or without strap **140**. Before placing assembled mouthguard **100** into the boiling or near boiling water, strap **140** is attached to posts **125** or undercuts **125a**. Using strap **140** as a handle, if attached, mouthguard **100** is dipped into the boiling or near boiling water for about 30 seconds, excess water is shaken off after which the wearer bites down on the softened mouthguard **100** to form it into the shape of the wearer’s mouth. Preferably heat is removed from boiling water for about 30 seconds before mouthguard is placed in the water. Because header **142** is softened with upper portion **111** and platform **120**, upper portion **111** and platform **120** are molded around header **142** to fixedly or permanently attach strap **140** to mouthguard **100**.

FIG. **18** is a side view of mouthguard **100** after the molding process is performed. The material used to fabricate the mouthguard is softened sufficiently to compress the posts and/or undercuts so that air cushions are enclosed by upper portion **111** and platform **120**. FIG. **19** is a cross section view of mouthguard **100** taken along **19-19** of FIG. **18**. The cross section is taken through one of air cushions **126** after the molding (fitting) process. Air cushion **126** is present after fitting and is enclosed by compressed undercut **124a**, bottom surface **114a**, and base **121**. Mouthguard **10** and air cushions **26** are compressed in a similar manner during the fitting process.

Although a variety of materials may be used to fabricate mouthguards **10** and **100**, ethyl vinyl acetate (EVA) is preferred as it readily softens in boiling water and remains soft after water immersion for a sufficient time to allow molding in the wearer’s mouth to occur. In a more preferred embodiment, the material for fillers **30** and **130** is made from a softer or “low melt” grade of EVA than upper portions **11** and **111** and platforms **20** and **120**. Other materials that may be used in

a similar manner include Kraton styrene polymer material, PVC, and ENGAGE™, a polyethylene polymer product produced by Dow Chemical.

Thus it is seen that the objects of the invention are efficiently obtained, although changes and modifications to the invention should be readily apparent to those having ordinary skill in the art, which changes would not depart from the spirit and scope of the invention as claimed.

We claim:

- 1. A mouthguard comprising:
  - an upper portion in the form of a u-shaped channel having an inner wall, an outer wall and a floor, said floor of said u-shaped channel defining a plurality of holes;
  - a lower platform having a u-shaped base and a plurality of posts distributed on said u-shaped base and extending therefrom; and,
  - a filler material molded to the inside of said u-shaped channel of said upper portion;
 wherein said each of said plurality of posts is aligned with one of said plurality of holes such that at least a portion of the length of each of said plurality of said posts extends through said aligned hole when said lower platform is joined with said upper portion;
  - at least one undercut segment in direct contact with and extending from said u-shaped base of said lower platform and surrounding at least one of said plurality of posts and wherein each of said at least one undercut segments is positioned between said upper portion and said base of said lower platform when said lower platform is joined with said upper portion;
  - wherein the height of said at least one of said plurality of posts measured from said u-shaped base of said lower platform to the end of said at least one post of said plurality of posts is higher than the height of said at least one undercut segment that surrounds said at least one of said plurality of posts measured from said u-shaped base of said lower platform;
  - at least one perimeter groove, wherein each of said at least one perimeter grooves is cut into said bottom surface of said floor of said upper portion around one of said plurality of holes so as to surround one of said plurality of holes, each of said at least one perimeter grooves having a depth less than said each one of said plurality of holes such that each of said at least one undercut segments fits into one of said at least one perimeter grooves when said lower platform is joined with said upper portion;
  - wherein a groove is molded into a bottom surface of said floor of said u-shaped channel of said upper portion.
- 2. The mouthguard as recited in claim 1 further comprising an attachment strap, said attachment strap having a header at

one end of said strap wherein said header is shaped to fit into said groove between said upper portion and said lower platform, wherein said attachment strap is attached to said mouthguard when said lower platform is joined to said upper portion.

- 3. The mouthguard as recited in claim 2 wherein said attachment strap defines a plurality of strap holes distributed along the length of said strap and includes at least one leader at the other end of said strap configured to fit through at least one of said plurality of strap holes.
- 4. The mouthguard as recited in claim 1 further comprising an attachment strap, said attachment strap having a header at one end of said strap wherein said header is shaped to attach to at least one of said plurality of posts.
- 5. The mouthguard as recited in claim 4 wherein said header is shaped to attach to said at least one post using a snap fit.
- 6. The mouthguard as recited in claim 5 wherein said shaped header comprises two prongs wherein each of said two prongs is shaped to attach to a separate one of said plurality of posts.
- 7. The mouthguard as recited in claim 1 further comprising an attachment strap, said attachment strap having a header at one end of said strap wherein said header is shaped to attach to at least one of said plurality of undercut segments.
- 8. The mouthguard as recited in claim 7 wherein said header is shaped to attach to said at least one undercut segment using a snap fit.
- 9. The mouthguard as recited in claim 8 wherein said shaped header comprises two prongs wherein each of said two prongs is shaped to attach to a separate one of said plurality of posts.
- 10. The mouthguard as recited in claim 1 wherein said upper portion and lower platform are each fabricated from ethylene vinyl acetate.
- 11. The mouthguard as recited in claim 10 wherein said filler material is softer than said upper portion and said lower platform.
- 12. The mouthguard as recited in claim 11 wherein said softer material is ethylene vinyl acetate.
- 13. The mouthguard as recited in claim 1 wherein at least one air cushion is formed between two posts.
- 14. The mouthguard as recited in claim 13 wherein said at least one air cushion comprises a plurality of air cushions.
- 15. The mouthguard as recited in claim 1 wherein at least one air cushion is formed between two succeeding undercut segments.
- 16. The mouthguard as recited in claim 15 wherein said at least one air cushion comprises a plurality of air cushions.

\* \* \* \* \*