



US009080635B2

(12) **United States Patent**
Avins

(10) **Patent No.:** **US 9,080,635 B2**

(45) **Date of Patent:** **Jul. 14, 2015**

(54) **HARDENED TURBINE PLATE**

USPC 60/330, 338, 361
See application file for complete search history.

(75) Inventor: **David C. Avins**, Burbank, OH (US)

(73) Assignee: **Schaeffler Technologies AG & Co. KG**,
Herzogenaurach (DE)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 611 days.

6,044,946 A * 4/2000 Makino et al. 60/361
6,142,272 A 11/2000 Meisner et al.
7,401,688 B2 * 7/2008 Fukunaga et al. 60/338
8,607,556 B2 * 12/2013 Graf 60/338

* cited by examiner

(21) Appl. No.: **13/441,509**

(22) Filed: **Apr. 6, 2012**

(65) **Prior Publication Data**

US 2012/0266589 A1 Oct. 25, 2012

Primary Examiner — Thomas E Lazo

(74) *Attorney, Agent, or Firm* — Simpson & Simpson, PLLC

Related U.S. Application Data

(60) Provisional application No. 61/476,847, filed on Apr. 19, 2011.

(51) **Int. Cl.**

F16H 41/24 (2006.01)
F16F 15/12 (2006.01)
F16H 45/02 (2006.01)

(57) **ABSTRACT**

A torque converter, including: a damper assembly including a cover plate including a first plurality of openings, a flange, and at least one spring in contact with the flange and the cover plate; a turbine including at least one first blade and a shell including a portion disposed radially inward of the at least one blade, and a second plurality of openings in the portion; a turbine plate with a third plurality of openings; and a plurality of fasteners passing through the first, second, and third pluralities of openings. The plurality of fasteners: fixedly secure the cover plate, the portion of the turbine shell, and the turbine plate to one another; or fixed securing the portion of the turbine shell to the turbine plate and restricting rotation of the cover plate with respect to the portion of the turbine shell to the turbine plate.


(52) **U.S. Cl.**

CPC **F16F 15/1207** (2013.01); **F16H 41/24** (2013.01); **F16H 2045/021** (2013.01); **F16H 2045/0205** (2013.01); **F16H 2045/0226** (2013.01); **F16H 2045/0278** (2013.01); **F16H 2045/0294** (2013.01)

(58) **Field of Classification Search**

CPC F16F 15/1207; F16H 2045/0205; F16H 2045/021; F16H 2045/0226; F16H 2045/0278; F16H 2045/0294; F16H 41/24

18 Claims, 7 Drawing Sheets

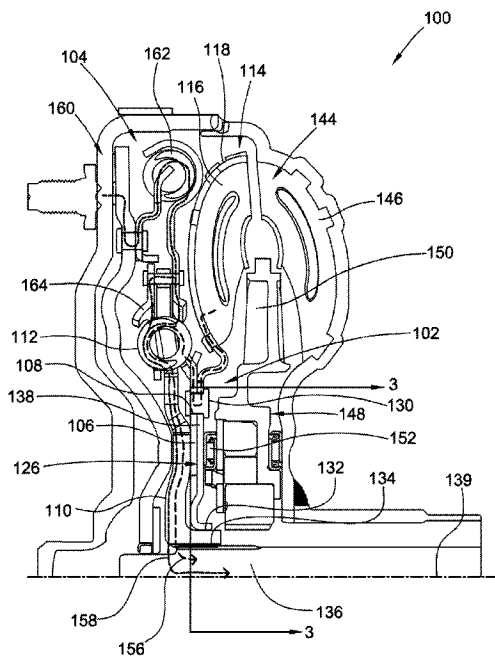

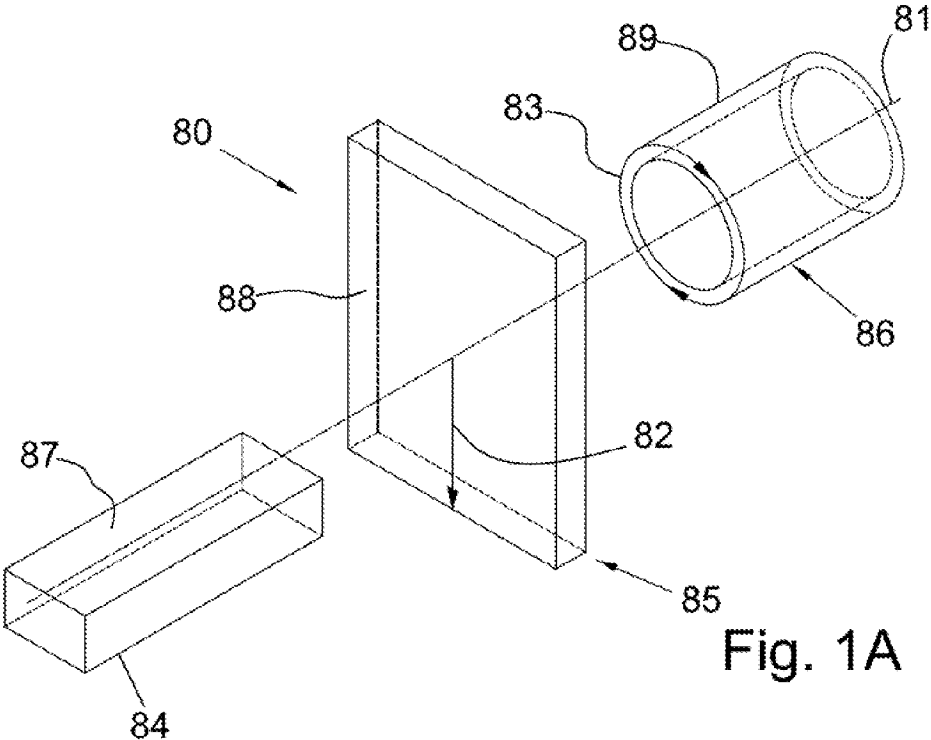


Fig. 1A

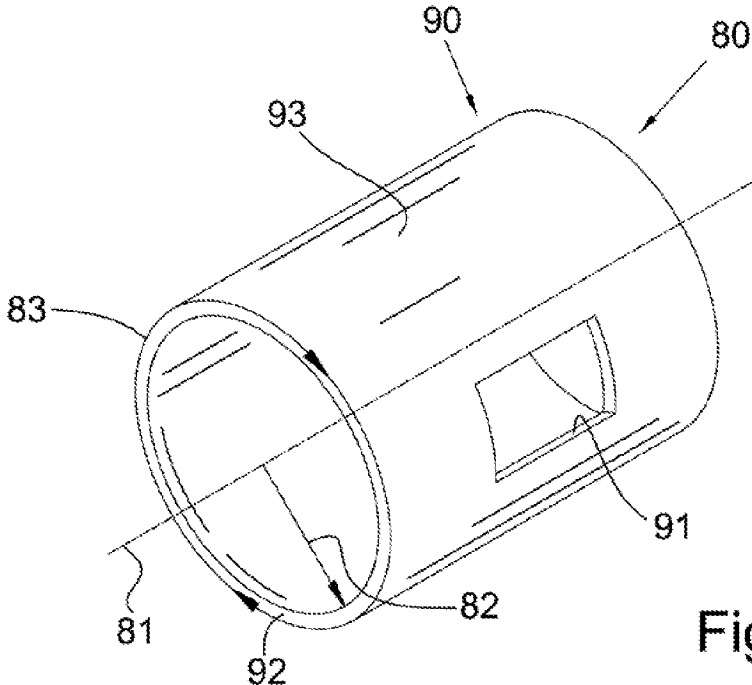


Fig. 1B

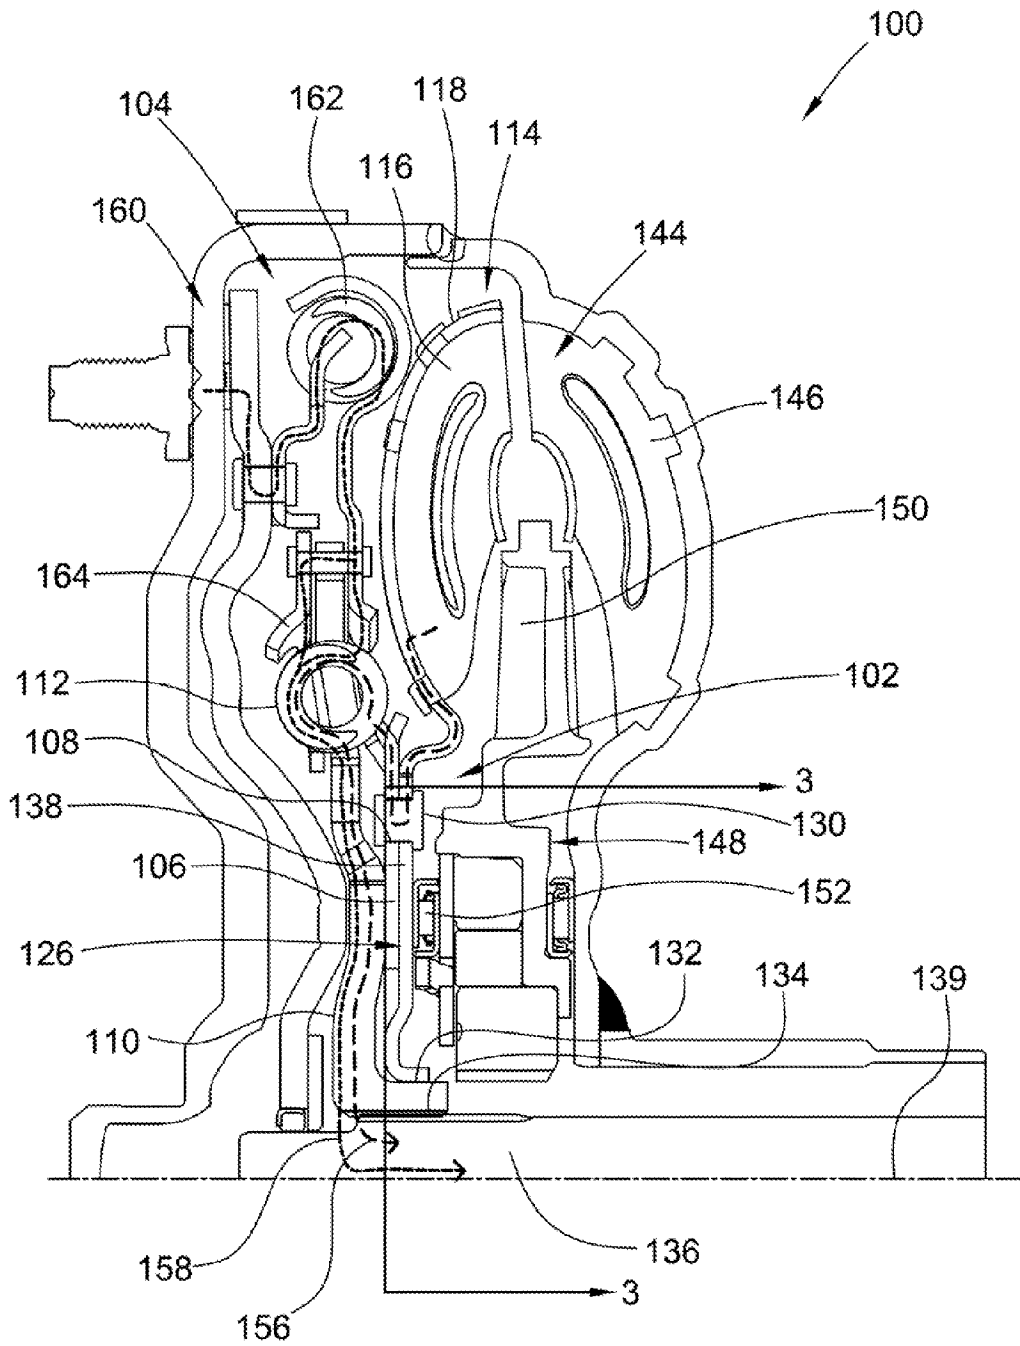


Fig. 2

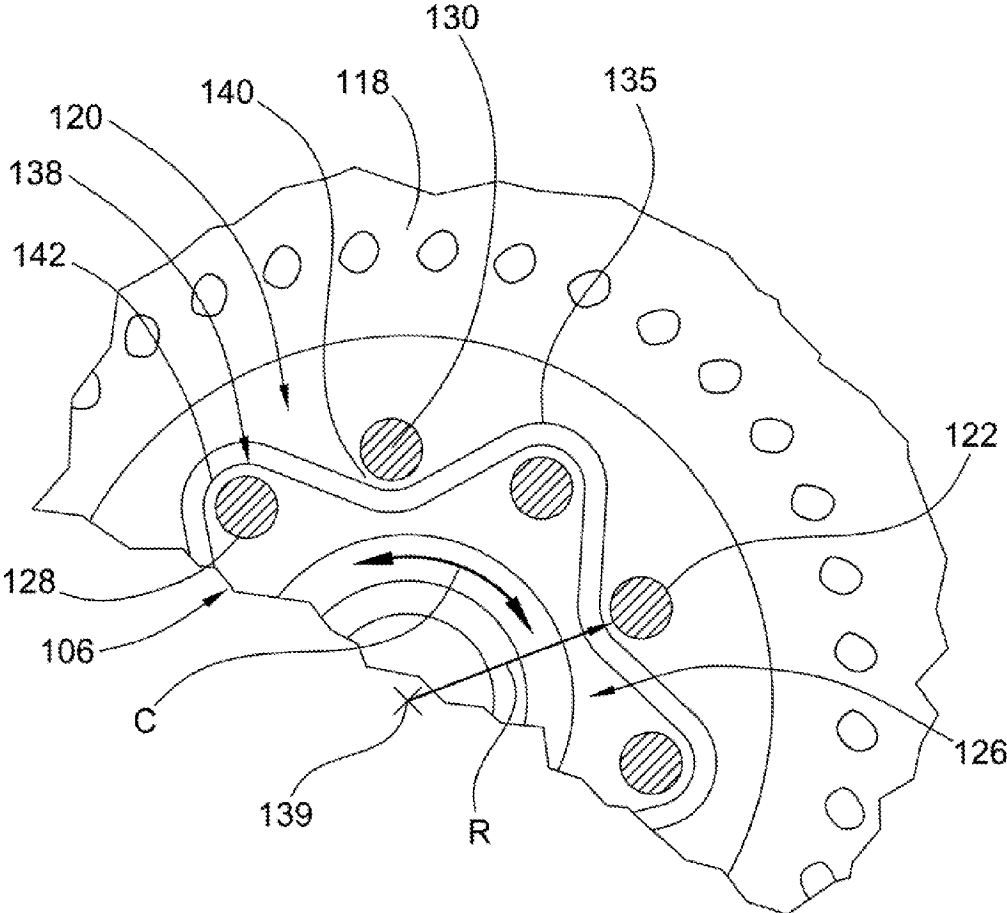


Fig. 3

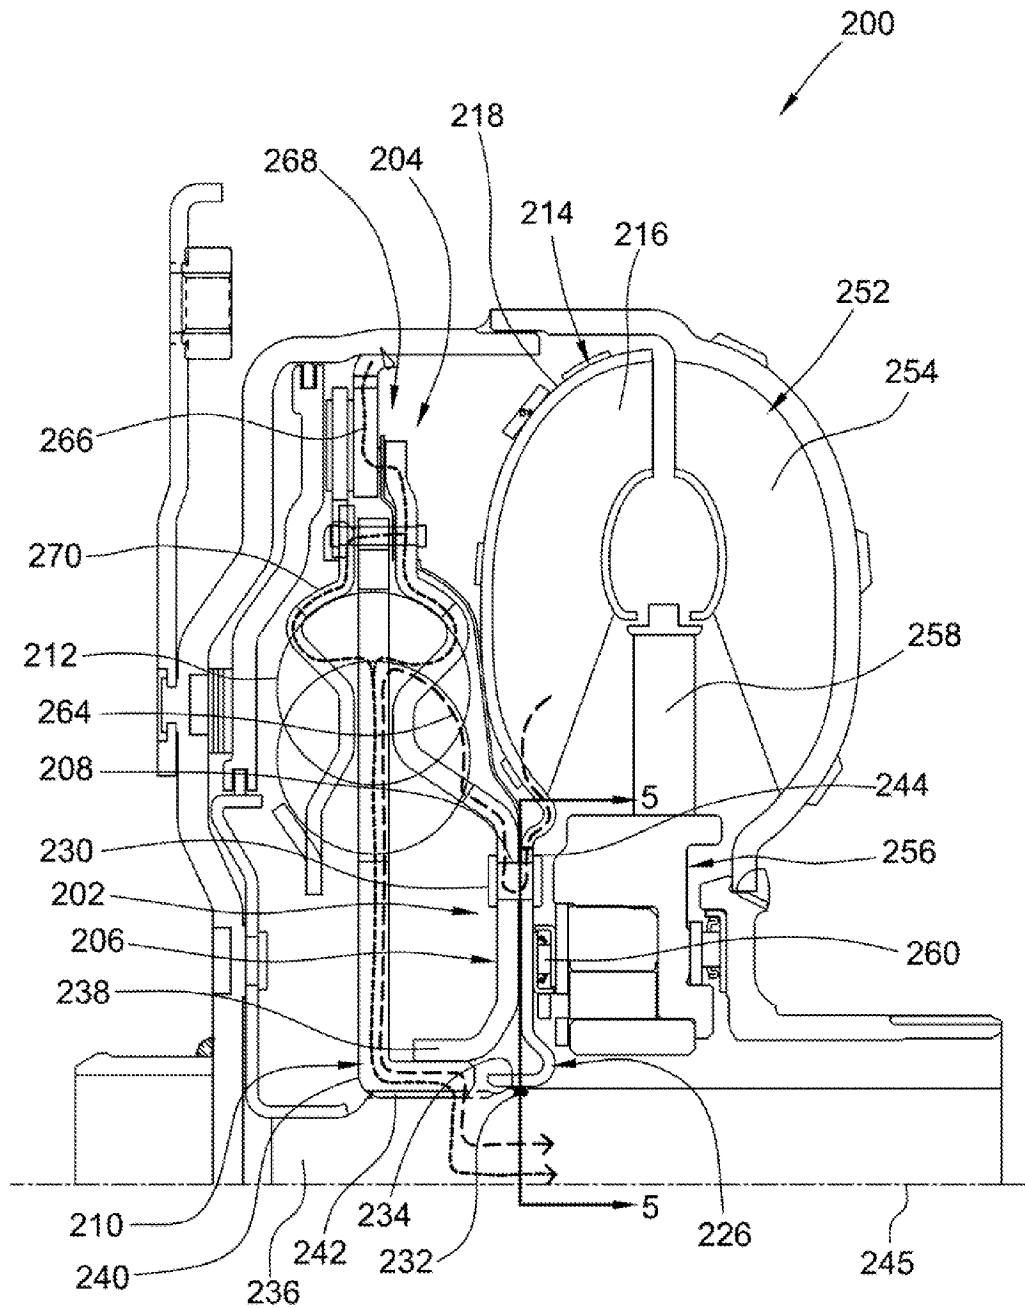


Fig. 4

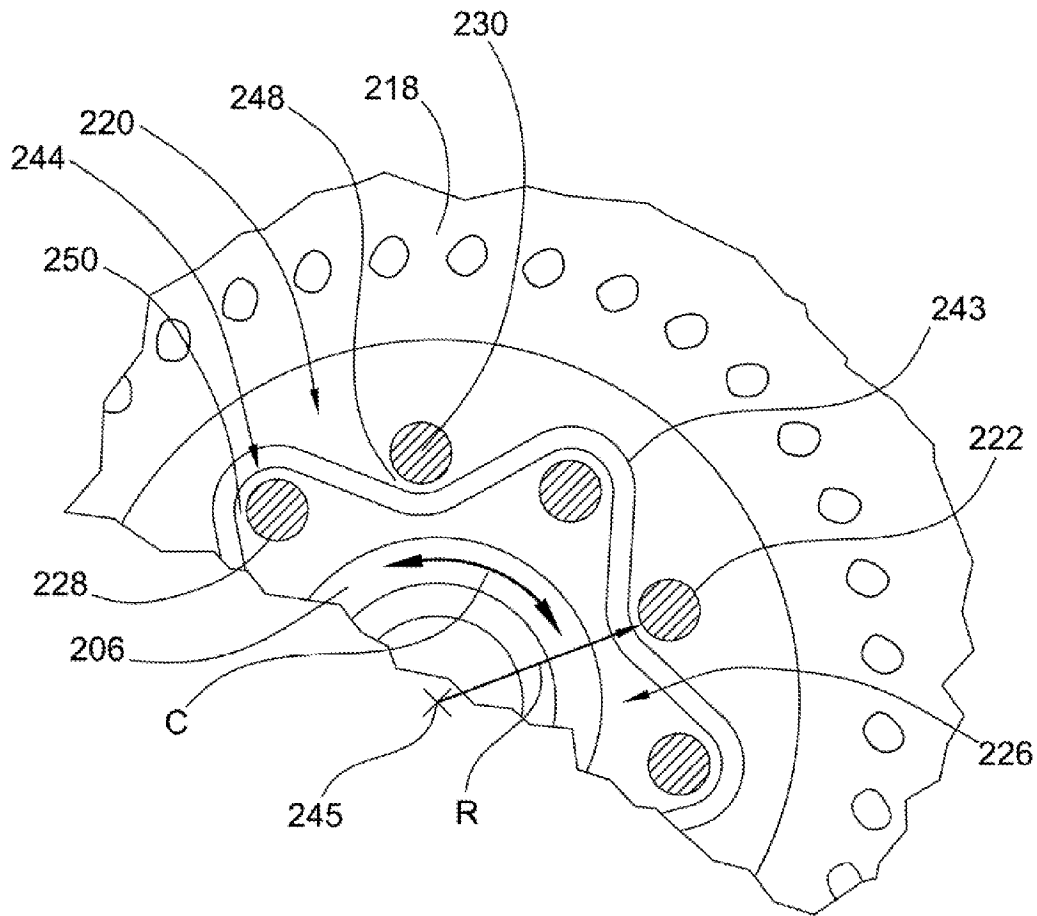


Fig. 5

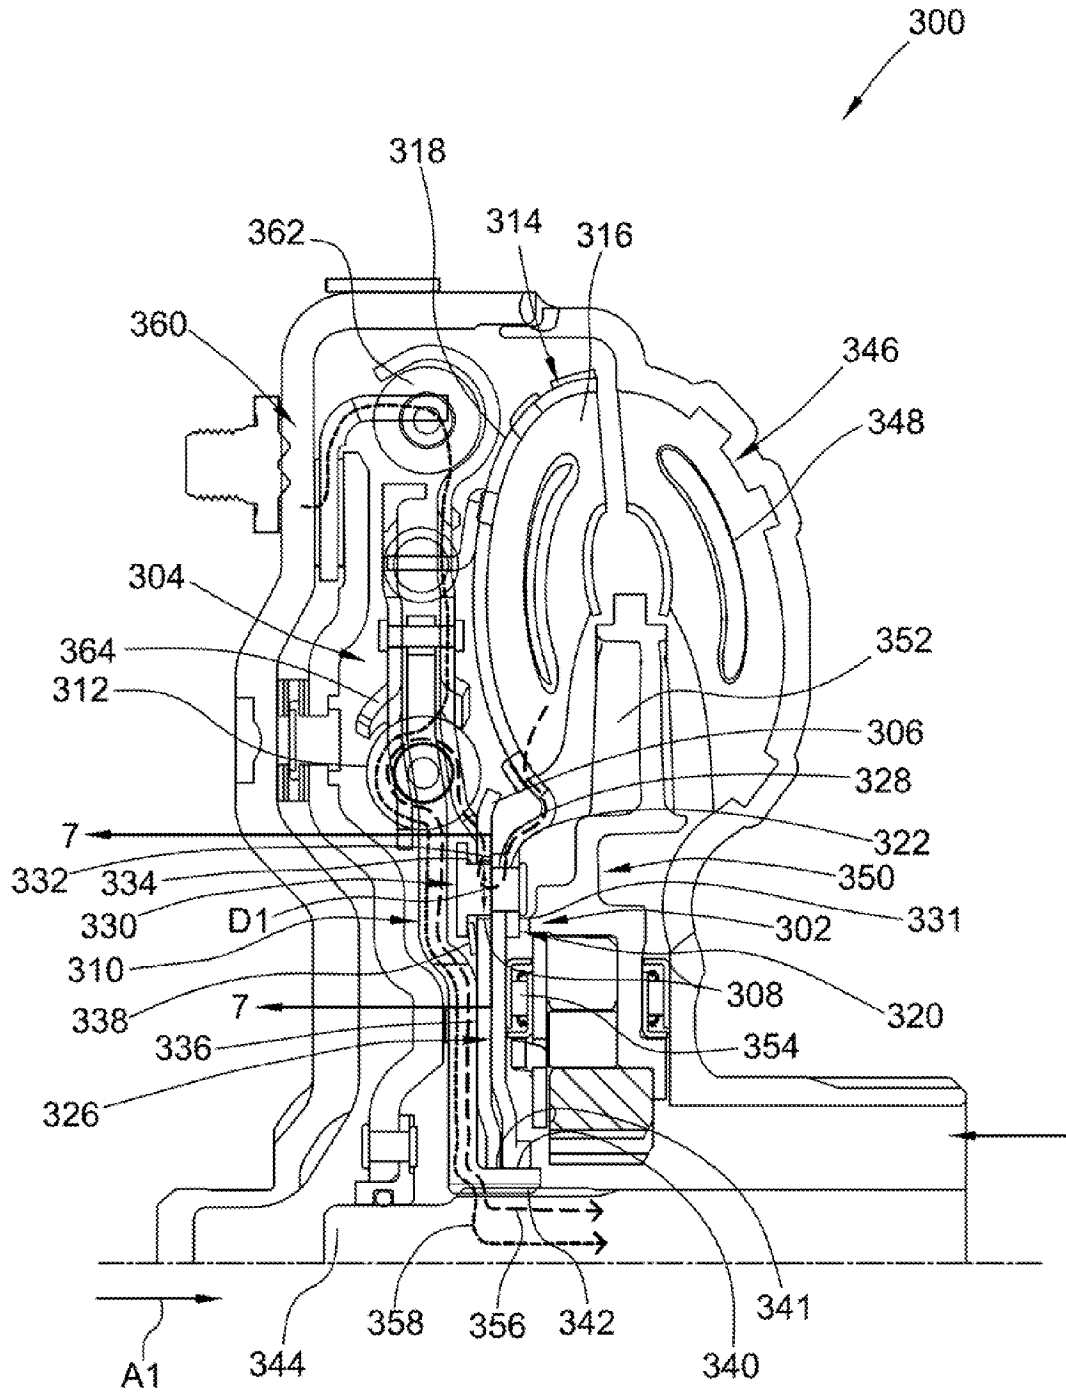


Fig. 6

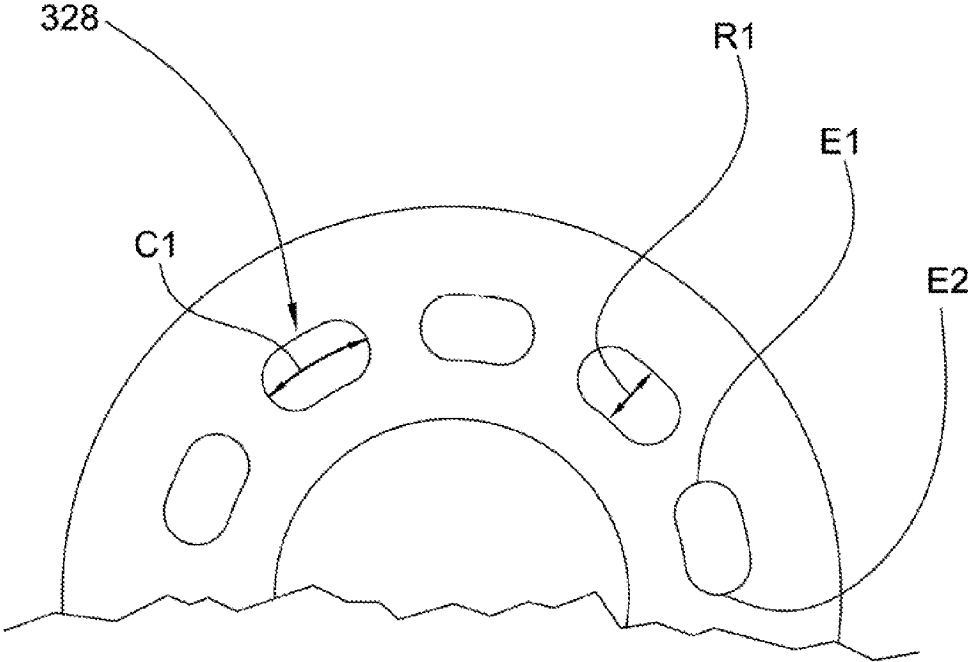


Fig. 7

1

HARDENED TURBINE PLATE**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims the benefit under 35 U.S.C. §119 (e) of U.S. Provisional Application No. 61/476,847 filed Apr. 19, 2011, which application is incorporated herein by reference.

TECHNICAL FIELD

The present disclosure relates to an assembly for a torque converter that links a turbine to a damper assembly and eliminates a turbine hub. Specifically, a hardened plate links the turbine and the damper assembly and provides a surface to receive a thrust bearing.

BACKGROUND

Commonly owned U.S. Pat. No. 6,142,272 discloses a torque converter including a plate welded to a turbine shell and connected to cover plates for a damper assembly. A thrust bearing is located between the plate and a stator. The patent also discloses a turbine hub to which the damper assembly is connected. The turbine hub receives torque from the turbine or the damper assembly and transmits the torque to an input shaft for a transmission.

SUMMARY

According to aspects illustrated herein, there is provided an assembly for a torque converter, including: a damper assembly including a cover plate including a first plurality of openings, a flange, and at least one spring in contact with the flange and the cover plate; a turbine including at least one first blade and a shell including a portion disposed radially inward of the at least one blade, and a second plurality of openings in the portion; a turbine plate with a third plurality of openings; and a plurality of fasteners passing through the first, second, and third pluralities of openings. The plurality of fasteners: fixedly secure the cover plate, the portion of the turbine shell, and the turbine plate to one another; or fixedly securing the portion of the turbine shell to the turbine plate and restricting rotation of the cover plate with respect to the portion of the turbine shell to the turbine plate.

According to aspects illustrated herein, there is provided a torque converter, including: a turbine including at least one first blade and a shell including a portion disposed radially inward of the at least one blade, and a first plurality of openings in the portion; an impeller with at least one second blade; a stator with at least one third blade, the stator axially disposed between to the turbine and the impeller; a damper assembly including a cover plate including a second plurality of openings, a flange, and at least one spring in contact with the flange and the cover plate; and a turbine plate assembly including: a turbine plate with a third plurality of openings; a plurality of fasteners passing through the first, second, and third pluralities of openings and fixedly securing the portion of the turbine shell to the turbine plate; and a resilient element in contact with the plurality of fasteners and the cover plate and urging the cover plate toward the turbine plate. The torque converter includes a bearing axially disposed between the turbine plate and the stator and in contact with the turbine plate and the stator to enable relative rotation of the turbine shell with respect to the stator. A radially inner circumference of the turbine plate is in contact with the flange to radially

2

center the turbine with respect to the flange. Torque from the turbine is transmitted from the portion of the turbine shell to the cover plate through the plurality of fasteners and from the cover plate to the flange of the damper through the at least one spring. The portion of the turbine shell and a radially outward portion of the turbine plate are aligned in an axial direction. For each fastener in the plurality of fasteners, a first portion of said each fastener passing through the cover plate has a first diameter. Each opening in the first plurality of openings has a radial extent and a circumferential extent each greater than the diameter such that relative rotation of the cover plate and the plurality of fasteners is enabled.

According to aspects illustrated herein, there is provided a torque converter, including: a turbine including at least one first blade and a shell including a portion disposed radially inward of the at least one blade, and a first plurality of openings in the portion; an impeller with at least one second blade; a stator with at least one third blade, the stator connected to the turbine and the impeller; a damper assembly including a cover plate including a second plurality of openings, a flange, and at least one spring in contact with the flange and the cover plate; and a turbine plate assembly including: a turbine plate with a third plurality of openings; and a plurality of fasteners passing through the first, second, and third pluralities of openings and fixedly securing the portion of the turbine shell to the turbine plate. The torque converter includes a bearing axially disposed between the turbine plate and the stator and in contact with the turbine plate and the stator to enable relative rotation of the turbine shell with respect to the stator. Torque from the turbine is transmitted from the portion of the turbine shell to the cover plate through the plurality of fasteners and from the cover plate to the flange of the damper through the at least one spring. The portion of the turbine shell and a radially outward portion of the turbine plate are aligned in a radial direction. A radially inner circumference of the turbine plate is in contact with the flange to radially center the turbine with respect to the flange; or the turbine plate assembly includes a seal element sealed against a radially inner circumference of the turbine plate and arranged to seal against an input shaft for a transmission.

BRIEF DESCRIPTION OF THE DRAWINGS

Various embodiments are disclosed, by way of example only, with reference to the accompanying schematic drawings in which corresponding reference symbols indicate corresponding parts, in which:

FIG. 1A is a perspective view of a cylindrical coordinate system demonstrating spatial terminology used in the present application;

FIG. 1B is a perspective view of an object in the cylindrical coordinate system of FIG. 1A demonstrating spatial terminology used in the present application; and,

FIG. 2 is a partial cross-sectional view of a torque converter with a turbine plate assembly;

FIG. 3 is a front view generally along line 3-3 in FIG. 2;

FIG. 4 is a partial cross-sectional view of a torque converter with a turbine plate assembly;

FIG. 5 is a front view generally along line 5-5 in FIG. 4;

FIG. 6 is a partial cross-sectional view of a torque converter with a turbine plate assembly;

FIG. 7 is a back view generally along line 7-7 in FIG. 6.

DETAILED DESCRIPTION

At the outset, it should be appreciated that like drawing numbers on different drawing views identify identical, or

functionally similar, structural elements of the disclosure. It is to be understood that the disclosure as claimed is not limited to the disclosed aspects.

Furthermore, it is understood that this disclosure is not limited to the particular methodology, materials and modifications described and as such may, of course, vary. It is also understood that the terminology used herein is for the purpose of describing particular aspects only, and is not intended to limit the scope of the present disclosure.

Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood to one of ordinary skill in the art to which this disclosure belongs. It should be understood that any methods, devices or materials similar or equivalent to those described herein can be used in the practice or testing of the disclosure.

FIG. 1A is a perspective view of cylindrical coordinate system **80** demonstrating spatial terminology used in the present application. The present invention is at least partially described within the context of a cylindrical coordinate system. System **80** has a longitudinal axis **81**, used as the reference for the directional and spatial terms that follow. The adjectives “axial,” “radial,” and “circumferential” are with respect to an orientation parallel to axis **81**, radius **82** (which is orthogonal to axis **81**), and circumference **83**, respectively. The adjectives “axial,” “radial” and “circumferential” also are regarding orientation parallel to respective planes. To clarify the disposition of the various planes, objects **84**, **85**, and **86** are used. Surface **87** of object **84** forms an axial plane. That is, axis **81** forms a line along the surface. Surface **88** of object **85** forms a radial plane. That is, radius **82** forms a line along the surface. Surface **89** of object **86** forms a circumferential plane. That is, circumference **83** forms a line along the surface. As a further example, axial movement or disposition is parallel to axis **81**, radial movement or disposition is parallel to radius **82**, and circumferential movement or disposition is parallel to circumference **83**. Rotation is with respect to axis **81**.

The adverbs “axially,” “radially,” and “circumferentially” are with respect to an orientation parallel to axis **81**, radius **82**, or circumference **83**, respectively. The adverbs “axially,” “radially,” and “circumferentially” also are regarding orientation parallel to respective planes.

FIG. 1B is a perspective view of object **90** in cylindrical coordinate system **80** of FIG. 1A demonstrating spatial terminology used in the present application. Cylindrical object **90** is representative of a cylindrical object in a cylindrical coordinate system and is not intended to limit the present invention in any manner. Object **90** includes axial surface **91**, radial surface **92**, and circumferential surface **93**. Surface **91** is part of an axial plane, surface **92** is part of a radial plane, and surface **93** is a circumferential surface.

FIG. 2 is a partial cross-sectional view of torque converter **100** with turbine plate assembly **102**.

FIG. 3 is a front view generally along line 3-3 in FIG. 2. The following should be viewed in light of FIGS. 2 and 3. Torque converter **100** includes damper assembly **104** including cover plate **106** with a plurality of openings **108**, flange **110**, and at least one spring **112** in contact with the flange and the cover plate. The torque converter also includes turbine **114** including at least one blade **116** and shell **118** including portion **120** disposed radially inward of blade **116**. Portion **120** also includes a plurality of openings **122**. Turbine plate assembly **102** includes turbine plate **126** with a plurality of openings **128**, and a plurality of fasteners **130** passing through the openings **108**, **122**, and **128**. Fasteners **130** fixedly secure cover plate **106**, portion **120**, and the turbine plate to one another.

In an example embodiment, radially inner circumference **132** of the turbine plate is in contact with the flange to radially center the turbine with respect to the flange. In an example embodiment, radially inner circumference **134** of the flange is arranged to contact input shaft **136** for a transmission (not shown) to radially center the flange with respect to the input shaft and to transmit torque to the input shaft as further described below.

In an example embodiment, radially inner circumference **135** of portion **120** of the turbine shell and radially outer circumference **138** of the turbine plate are aligned in a radial direction, advantageously minimizing an axial extent of the turbine plate assembly. In an example embodiment, openings **122** and **128** are at least partially aligned in a circumferential direction such that fasteners **130** are at a uniform radial distance **R** from axis of rotation **139** for the torque converter. Having fasteners **130** at a single radius reduces the radial space requirements for assembly **102**. For example, if respective fasteners for the turbine plate and portion **120** were at different radii, greater radial space would be needed to accommodate the two rings of fasteners. In an example embodiment, portion **120** includes a plurality of radially inwardly projecting protrusions **140** and the turbine plate includes a plurality of radially outwardly projecting protrusions **142**. Protrusions **140** and **142** are interleaved. By interleaved, we mean that protrusions **140** and **142** are at least partially aligned in circumferential direction **C** and protrusions **140** and **142** alternate in direction **C**.

In an example embodiment, torque converter **100** includes impeller **144** with at least one blade **146**, stator **148** with at least one blade **150**, and bearing **152**. The stator is axially disposed between the turbine and the impeller, and the bearing is axially disposed between the turbine plate and the stator and in contact with the turbine plate and the stator to enable relative rotation of the turbine shell with respect to the stator. In an example embodiment, bearing **152** is a thrust bearing and axial force associated with axial displacement of the damper assembly or the turbine toward each other is transmitted to the bearing. The most radially inward segment of the portion of the turbine shell is radially outward of the bearing.

Advantageously, the configuration shown for torque converter **100** eliminates the need for a separate turbine hub to center the turbine and the damper assembly and to connect the turbine and the damper assembly to an input shaft. Eliminating the hub reduces the cost, size, weight, and complexity of the torque converter. For example, torque path **156** (for operation in torque converter mode) extends from the turbine to the input shaft via portion **120**, fasteners **130**, cover plate **106**, spring **112**, and the flange. In lock-up mode, torque path **158** extends from lock-up clutch **160** to the input shaft via at least one spring **162**, cover plates **106** and **164**, spring **112**, and the flange.

FIG. 4 is a partial cross-sectional view of torque converter **200** with turbine plate assembly **202**. Torque converter **200** includes damper assembly **204** including cover plate **206** with a plurality of openings **208**, flange **210**, and at least one spring **212** in contact with the flange and the cover plate. The torque converter also includes turbine **214** including at least one blade **216** and shell **218** including portion **220** disposed radially inward of blade **216**. Portion **220** also includes a plurality of openings **222**. Turbine plate assembly **202** includes turbine plate **226** with a plurality of openings **228**, and a plurality of fasteners **230** passing through the openings **208**, **222**, and **228**. Fasteners **230** fixedly secure cover plate **206**, portion **220**, and turbine plate **226** to one another.

Assembly **224** includes seal element **232** sealed against radially inner circumference **234** of turbine plate **226** and

arranged to seal against input shaft **236** for a transmission (not shown). Radially inner circumference **238** of cover plate **206** is in contact with portion **240** of flange **210** and radially inner circumference **242** of the flange is arranged to contact input shaft **236** to radially center the flange and cover plate **206** with respect to the input shaft and to transmit torque to the input shaft as further described below.

In an example embodiment, radially inner circumference **243** of portion **220** of the turbine shell and radially outer circumference **244** of the turbine plate are aligned in a radial direction, advantageously minimizing an axial extent of the turbine plate assembly. In an example embodiment, openings **222** and **228** are at least partially aligned in circumferential direction **C** such that fasteners **230** are at a uniform radial distance **R** from axis of rotation **245** for the torque converter. In an example embodiment, portion **220** includes a plurality of radially inwardly projecting protrusions **248** and the turbine plate includes a plurality of radially outwardly projecting protrusions **250**. Protrusions **248** and **250** are interleaved. By interleaved, we mean that protrusions **248** and **250** are at least partially aligned in circumferential direction **C** and protrusions **248** and **250** alternate in direction **C**.

In an example embodiment, torque converter **200** includes impeller **252** with at least one blade **254**, stator **256** with at least one blade **258**, and bearing **260**. The stator is connected to the turbine and the impeller, and the bearing is axially disposed between the turbine plate and the stator and in contact with the turbine plate and the stator to enable relative rotation of the turbine shell with respect to the stator. In an example embodiment, bearing **260** is a thrust bearing and axial force associated with axial displacement of the damper assembly or the turbine toward each other is transmitted to the bearing.

Advantageously, the configuration shown for torque converter **200** eliminates the need for a separate turbine hub to provide a seal, to center the turbine and the damper assembly, and to connect the turbine and the damper assembly to an input shaft. Eliminating the hub reduces the cost, size, weight, and complexity of the torque converter. For example, torque path **264** (for operation in torque converter mode) extends from the turbine to the input shaft via portion **220**, fasteners **230**, cover plate **206**, spring **212**, and the flange. In lock-up mode, torque path **266** extends from lock-up clutch **268** to the input shaft via plates **206** and **270**, spring **212**, and flange **210**.

FIG. 6 is a partial cross-sectional view of torque converter **300** with turbine plate assembly **302**.

FIG. 7 is a back view generally along line 7-7 in FIG. 6. The following should be viewed in light of FIGS. 6 and 7. Torque converter **300** includes damper assembly **304** including cover plate **306** with a plurality of openings **308**, flange **310**, and at least one spring **312** in contact with the flange and the cover plate. The torque converter also includes turbine **314** including at least one blade **316** and shell **318** including portion **320** disposed radially inward of blade **316**. Portion **320** also includes a plurality of openings **322**. Turbine plate assembly **302** includes turbine plate **326** with a plurality of openings **328**, and a plurality of fasteners **330** passing through the openings **308**, **322**, and **328**.

Segment **331** of portion **320** and segment **332** of turbine plate **326** are aligned in axial direction **A1**. Fasteners **330** fixedly secure portion **320** and turbine plate **326** to one another and restrict rotation of cover plate **306** with respect to portion **320** and turbine plate **326**. To enable the fixing of plate **306** and portion **320**, portion **334** of fasteners **330**, passing through the cover plate, is engaged with radial surface **336** of plate **306**. Portion **334** has a diameter **D1** and each opening **328** is in the form of a circumferentially curved slot with

radial extent **R1** greater than **D1** and circumferential extent **C1** greater than **D1**. Thus, fasteners **330** have a limited degree of circumferential motion within openings **328** and with respect to turbine plate **326** and the turbine. Specifically, rotation of fasteners **330**, and turbine plate **326** and the turbine, is limited by contact of the fasteners with ends **E1** and **E2** of openings **328**. Assembly **324** also includes resilient element **338** which urges cover plate **306** in axial direction **A1** against turbine plate **326**, creating frictional contact, or hysteresis between cover plate **306** and turbine plate **326**, which is beneficial to the operation of damper assembly **304**. For example, the hysteresis can be used to tune the damper assembly to attenuate undesirable vibration.

In an example embodiment, radially inner circumferences **340** and **341** of the turbine plate and cover plate **306**, respectively, are in contact with flange **310** to radially center turbine **314** and cover plate **306** with respect to the flange. In an example embodiment, radially inner circumference **342** of the flange is arranged to contact input shaft **344** for a transmission (not shown) to radially center the flange with respect to the input shaft and to transmit torque to the input shaft as further described below.

In an example embodiment, torque converter **300** includes impeller **346** with at least one blade **348**, stator **350** with at least one blade **352**, and bearing **354**. The stator is connected to the turbine and the impeller, and the bearing is axially disposed between the turbine plate and the stator and in contact with the turbine plate and the stator to enable relative rotation of the turbine shell with respect to the stator. In an example embodiment, bearing **354** is a thrust bearing and axial force associated with axial displacement of the damper assembly or the turbine toward each other is transmitted to the bearing.

Advantageously, the configuration shown for torque converter **300** eliminates the need for a separate turbine hub to center the turbine and the damper assembly and to connect the turbine and the damper assembly to an input shaft. At the same time assembly **302** provides the desired frictional and rotational contact between cover plate **306** and turbine plate **326**. Eliminating the hub reduces the cost, size, weight, and complexity of the torque converter. For example, torque path **356** (for operation in torque converter mode) extends from the turbine to the input shaft via portion **320**, fasteners **330**, cover plate **306**, spring **312**, and the flange. In lock-up mode, torque path **358** extends from lock-up clutch **360** to the input shaft via at least one spring **362**, cover plates **106** and **364**, spring **112**, and the flange.

The following should be viewed in light of FIGS. 2 through 7. Advantageously, when turbine shell **118**, **218**, or **318** is formed by a stamping process, the respective turbine plate can be formed from the portion of the blank for the turbine shell left over from the stamping process, reducing cost for the turbine plate. Since a separate stamping operation with its attendant costs and complexities is not required, using the left over portion even further reduces costs and complexity for the turbine plate.

Advantageously, the turbine shell and the turbine plate shown in the figures can be subjected to differing fabrication processes once the pieces are formed by stamping. For example, it is usually not necessary to harden the turbine shell because of the added "rib" strength from the plurality of blades. Furthermore, if hardened, the shell would likely lose much of the strength gained during exposure to the elevated temperatures necessary to braze the blades. On the other hand, the turbine plate acts as a receiving surface for a thrust bearing and it is desirable to harden the turbine plate, for example, by heat treating, so that the turbine plate has better

7

wearing properties. If the receiving surface for the bearing and the turbine shell are formed of a single piece, the wearing properties of the plate would be sacrificed during the turbine manufacturing process. Further, if a receiving surface for a thrust bearing is integral to the shell, characteristics of the receiving surface can be undesirably modified by the brazing oven, for example, the receiving surface can be distorted. Advantageously, by the use of a separate turbine plate, the turbine plate can be withheld from the brazing oven when the turbine is formed.

Although torque converters **100**, **200**, and **300**, and assemblies **102**, **202**, and **302** have been shown with respective particular configurations of components, it should be understood that torque converters **100**, **200**, and **300**, and assemblies **102**, **202**, and **302** are not limited to the respective particular configuration of components shown and that other respective configurations of components are possible.

It will be appreciated that various of the above-disclosed and other features and functions, or alternatives thereof, may be desirably combined into many other different systems or applications. Various presently unforeseen or unanticipated alternatives, modifications, variations, or improvements therein may be subsequently made by those skilled in the art which are also intended to be encompassed by the following claims.

What I claim is:

1. An assembly for a torque converter, comprising:
 - a damper assembly including a cover plate including a first plurality of openings, a flange, and at least one spring in contact with the flange and the cover plate;
 - a turbine including at least one first blade and a shell including a portion disposed radially inward of the at least one blade, and a second plurality of openings in the portion;
 - a turbine plate with a third plurality of openings; and,
 - a plurality of fasteners passing through the first, second, and third pluralities of openings and:
 - fixedly securing the cover plate, the portion of the turbine shell, and the turbine plate to one another; or,
 - fixedly securing the portion of the turbine shell to the turbine plate and restricting rotation of the cover plate with respect to the portion of the turbine shell to the turbine plate, wherein the turbine plate is hardened by heat treatment and the turbine shell is not hardened by heat treatment.
2. The assembly of claim 1 wherein a radially inner circumference of the turbine plate is in contact with the flange to radially center the turbine with respect to the flange.
3. The assembly of claim 2 wherein a radially inner circumference of the flange is arranged to contact an input shaft for a transmission to radially center the flange with respect to the input shaft.
4. The assembly of claim 1 wherein torque from the turbine is transmitted from the portion of the turbine shell to the cover plate through the plurality of fasteners and from the cover plate to the flange of the damper through the at least one spring.
5. The assembly of claim 4 wherein the flange is arranged to engage an input shaft for a transmission to transmit the torque to the input shaft.
6. The assembly of claim 1 wherein the turbine plate is arranged to seal against an input shaft for a transmission.
7. The assembly of claim 1 wherein:
 - the torque converter includes an impeller with at least one second blade, a stator with at least one third blade, and a bearing;

8

the stator is axially disposed between the turbine and the impeller; and,

the bearing is axially disposed between the turbine plate and the stator and in contact with the turbine plate and the stator to enable relative rotation of the turbine shell with respect to the stator.

8. The assembly of claim 7 wherein axial force associated with axial displacement of the damper assembly or the turbine toward each other is transmitted to the bearing.

9. The assembly of claim 7 wherein a most radially inward segment of the portion of the turbine shell is radially outward of the bearing.

10. The assembly of claim 1 wherein an inner circumference of the portion of the turbine shell and an outer circumference of the turbine plate are aligned in a radial direction.

11. The assembly of claim 1 wherein the second and third pluralities of openings are at least partially aligned in a circumferential direction.

12. The assembly of claim 1 wherein at least respective segments of the portion of the turbine shell and the turbine plate are aligned in an axial direction.

13. The assembly of claim 1 wherein:

for each fastener in the plurality of fasteners, a first portion of said each fastener passing through the cover plate has a first diameter; and,

each opening in the first plurality of openings has a radial extent and a circumferential extent each greater than the diameter such that relative rotation of the cover plate and the plurality of fasteners is enabled.

14. The assembly of claim 13 wherein the first portion of said each fastener is in contact with a radial surface for the turbine plate.

15. The assembly of claim 13 further comprising a resilient element in contact with the plurality of fasteners and the cover plate and urging the cover plate toward the turbine plate.

16. The assembly of claim 1 wherein:

the portion of the turbine shell includes a plurality of radially inwardly projecting protrusions; and,

the turbine plate includes a plurality of radially outwardly projecting protrusions interleaved with the plurality of radially inwardly projecting protrusions and at least partially aligned in a circumferential direction with the plurality of radially inwardly projecting protrusions.

17. A torque converter, comprising:

a turbine including at least one first blade and a shell including a portion disposed radially inward of the at least one blade, and a first plurality of openings in the portion;

an impeller with at least one second blade;

a stator with at least one third blade, the stator axially disposed between the turbine and the impeller;

a damper assembly including a cover plate including a second plurality of openings, a flange, and at least one spring in contact with the flange and the cover plate;

a turbine plate assembly including:

a turbine plate with a third plurality of openings;

a plurality of fasteners passing through the first, second, and third pluralities of openings and fixedly securing the portion of the turbine shell to the turbine plate; and,

a radially inner circumference of the turbine plate is in contact with the flange to radially center the turbine with respect to the flange;

torque from the turbine is transmitted from the portion of the turbine shell to the cover plate through the plurality of fasteners and from the cover plate to the flange of the damper through the at least one spring;

9

the portion of the turbine shell and a radially outward portion of the turbine plate are aligned in an axial direction;
 for each fastener in the plurality of fasteners, a first portion of said each fastener passing through the cover plate has a first diameter; and,
 each opening in the first plurality of openings has a radial extent and a circumferential extent each greater than the diameter such that relative rotation of the cover plate and the plurality of fasteners is enabled.

18. A torque converter, comprising:

- a turbine including at least one first blade and a shell including a portion disposed radially inward of the at least one blade, and a first plurality of openings in the portion;
- an impeller with at least one second blade;
- a stator with at least one third blade, the stator connected to the turbine and the impeller;
- a damper assembly including a cover plate including a second plurality of openings, a flange, and at least one spring in contact with the flange and the cover plate;

10

- a turbine plate assembly including:
 - a turbine plate with a third plurality of openings; and,
 - a plurality of fasteners passing through the first, second, and third pluralities of openings and fixedly securing the portion of the turbine shell to the turbine plate, wherein:
 - torque from the turbine is transmitted from the portion of the turbine shell through the turbine plate to the cover plate through the plurality of fasteners and from the cover plate to the flange of the damper through the at least one spring; and
- the portion of the turbine shell and a radially outward portion of the turbine plate are aligned in a radial direction, wherein:
 - a radially inner circumference of the turbine plate is in contact with the flange to radially center the turbine with respect to the flange; or,
 - the turbine plate assembly is arranged to seal against an input shaft for a transmission.

* * * * *