



US009353844B2

(12) **United States Patent**
Frary

(10) **Patent No.:** **US 9,353,844 B2**

(45) **Date of Patent:** **May 31, 2016**

(54) **TWO-PASS MULTI-FUNCTION TORQUE CONVERTER WITH NORMALLY CLOSED IMPELLER CLUTCH**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Schaeffler Technologies GmbH & Co. KG**, Herzogenaurach (DE)

(72) Inventor: **Matthew Frary**, Erlangen (DE)

(73) Assignee: **Schaeffler Technologies AG & Co. KG**, Herzogenaurach (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/458,851**

(22) Filed: **Aug. 13, 2014**

(65) **Prior Publication Data**

US 2015/0053521 A1 Feb. 26, 2015

Related U.S. Application Data

(60) Provisional application No. 61/868,876, filed on Aug. 22, 2013.

(51) **Int. Cl.**

F16H 45/02 (2006.01)

F16H 45/00 (2006.01)

(52) **U.S. Cl.**

CPC **F16H 45/02** (2013.01); **F16H 2045/002** (2013.01); **F16H 2045/0205** (2013.01)

(58) **Field of Classification Search**

None

See application file for complete search history.

5,695,028 A *	12/1997	Fukushima	F16H 45/00	192/3.27
7,980,992 B2	7/2011	Sturgin			
8,042,665 B2	10/2011	Sturgin			
2004/0188208 A1 *	9/2004	Leber	F16H 45/02	192/3.25
2004/0216971 A1 *	11/2004	Johann	F16H 45/02	192/3.26
2007/0074943 A1 *	4/2007	Hemphill	F16H 45/02	192/3.25
2009/0014269 A1	1/2009	Ari et al.			
2009/0127050 A1 *	5/2009	Ari	F16H 45/02	192/3.29
2009/0157272 A1 *	6/2009	Uhler	F16H 45/02	701/67
2013/0140122 A1 *	6/2013	Hemphill	F16D 39/00	192/3.25
2015/0021137 A1 *	1/2015	Lindemann	F16H 45/02	192/3.29

* cited by examiner


Primary Examiner — Huan Le


(74) *Attorney, Agent, or Firm* — Simpson & Simpson, PLLC

(57) **ABSTRACT**


A multi-function torque converter, including: a cover arranged to receive torque; an impeller including an impeller shell and at least one impeller blade connected to the impeller shell; a turbine including a turbine shell and at least one turbine blade connected to the turbine shell; and an impeller clutch including a resilient element urging the impeller shell toward the cover to close the impeller clutch and including at least a portion located radially inward of the at least one impeller blade.

20 Claims, 7 Drawing Sheets

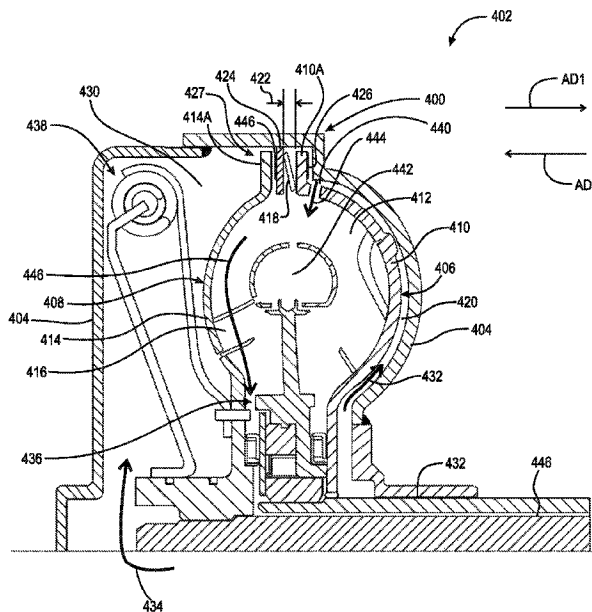

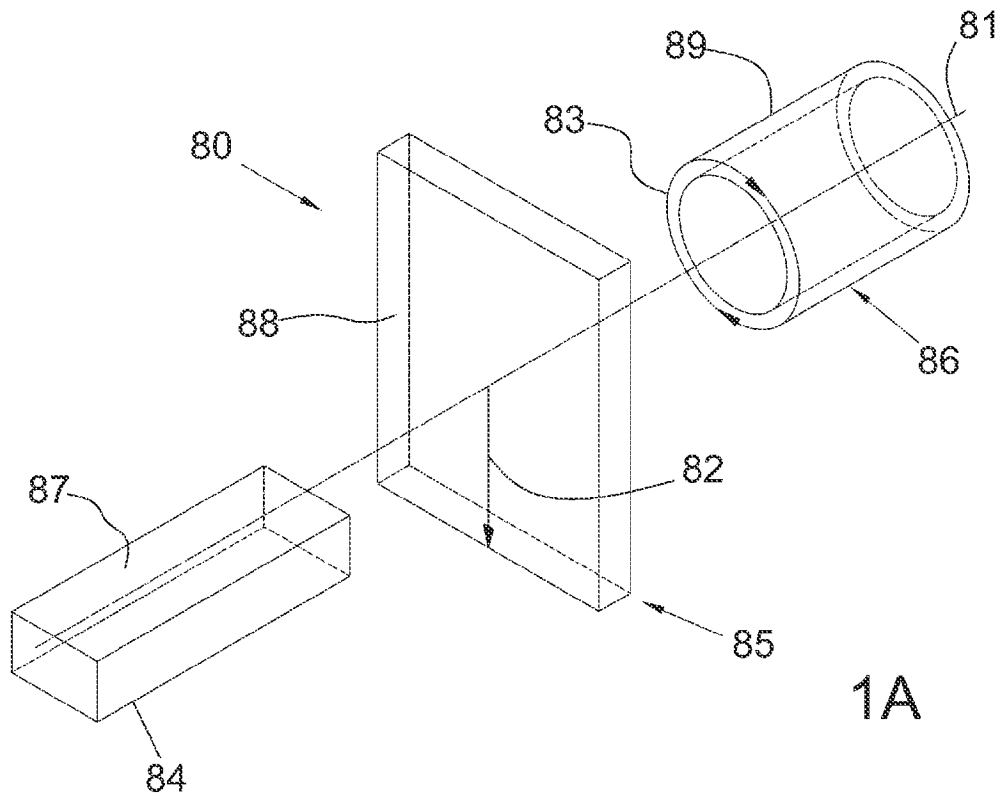

1A

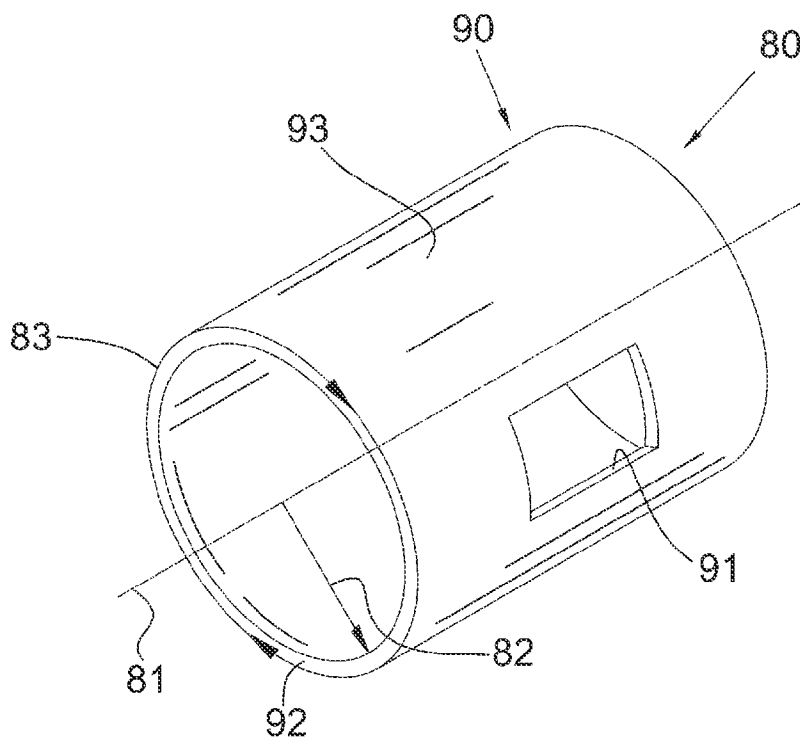

1B

Fig. 1

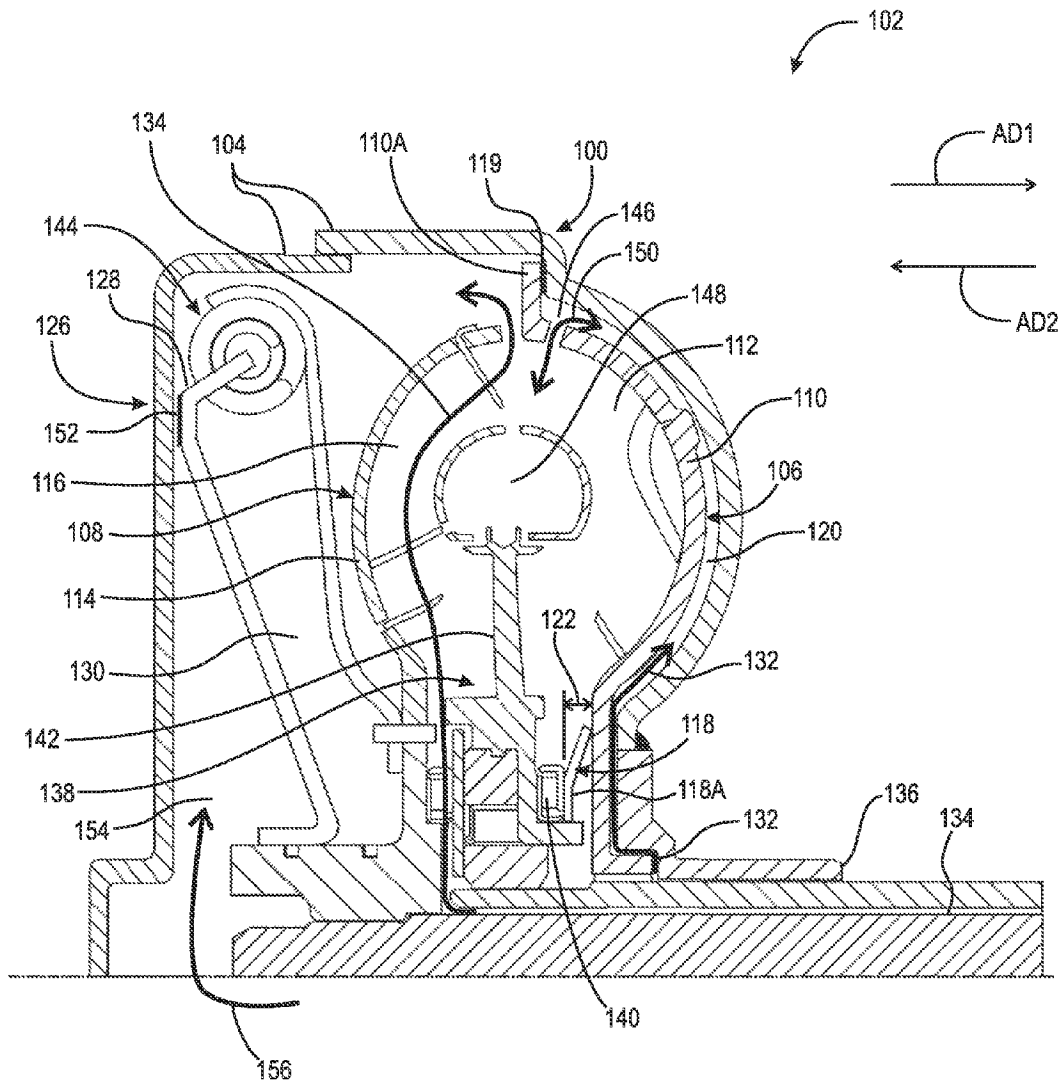


Fig. 2

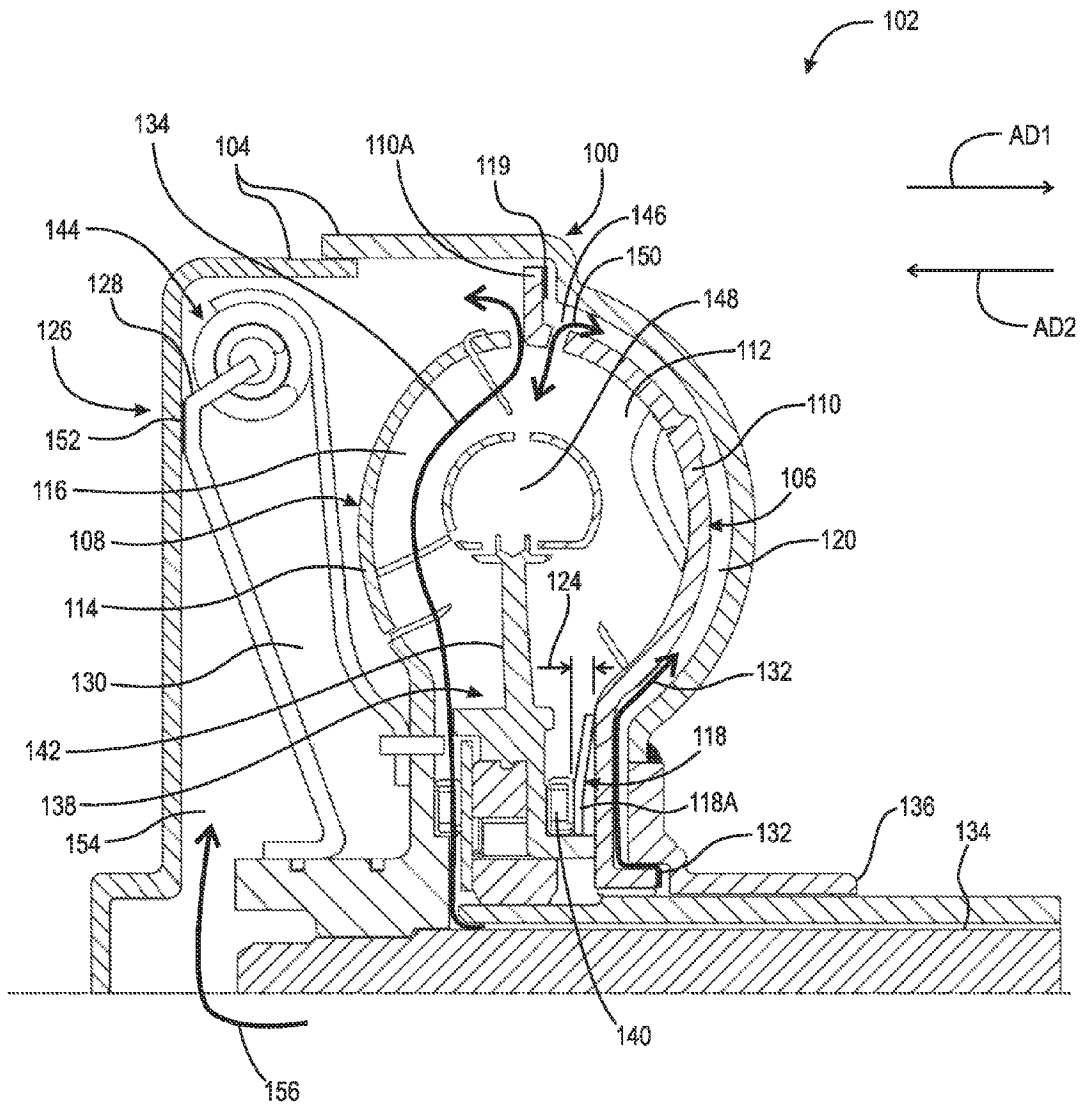


Fig. 3

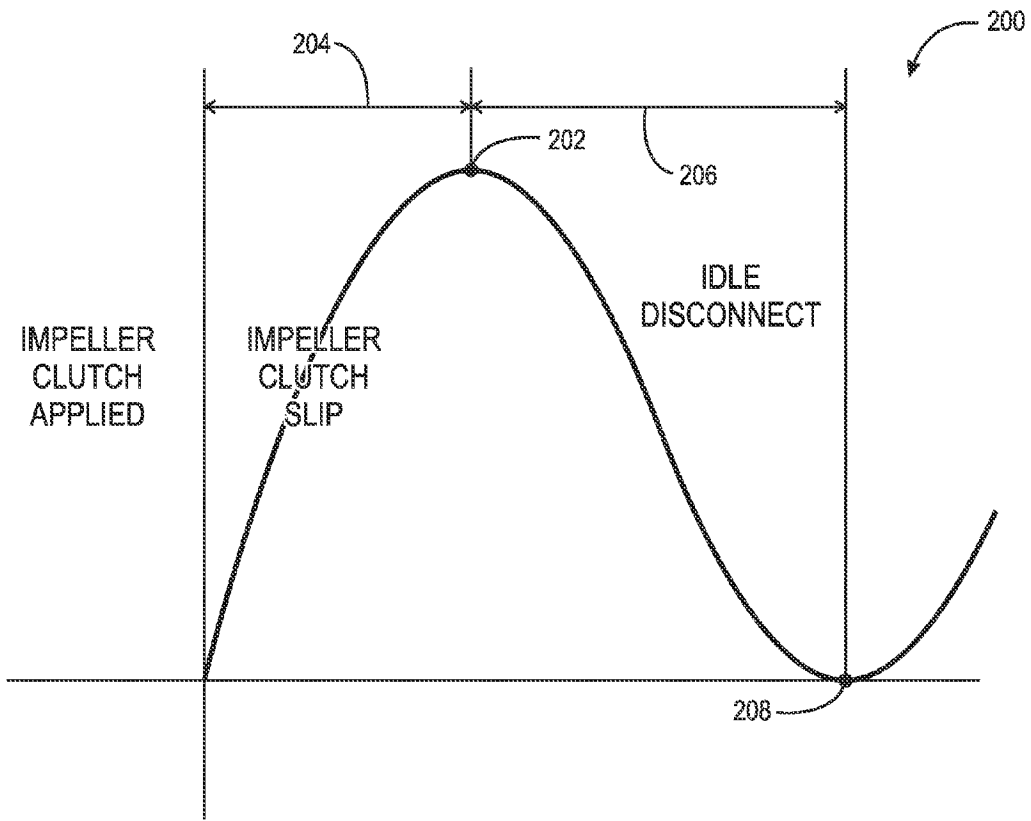


Fig. 4

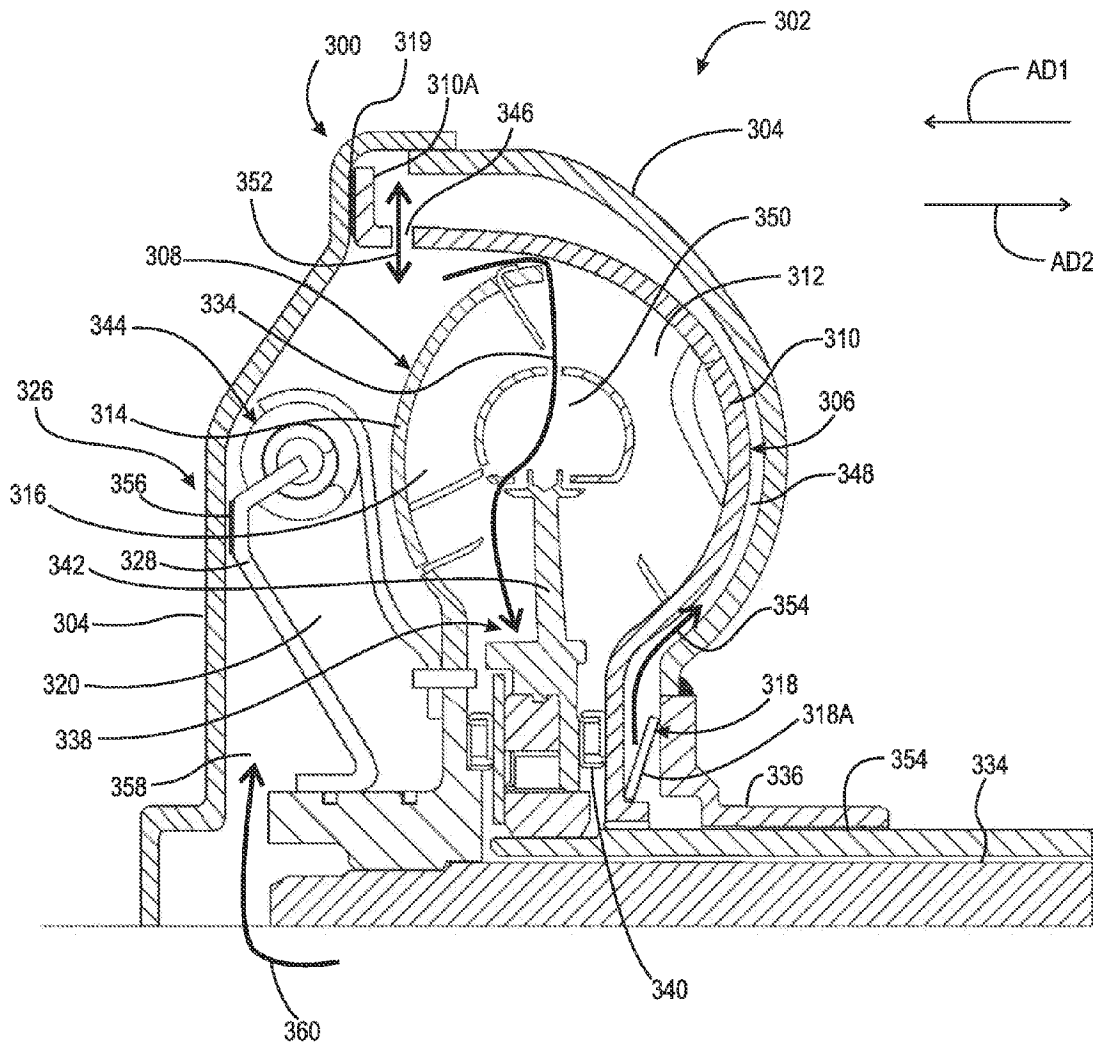


Fig. 5

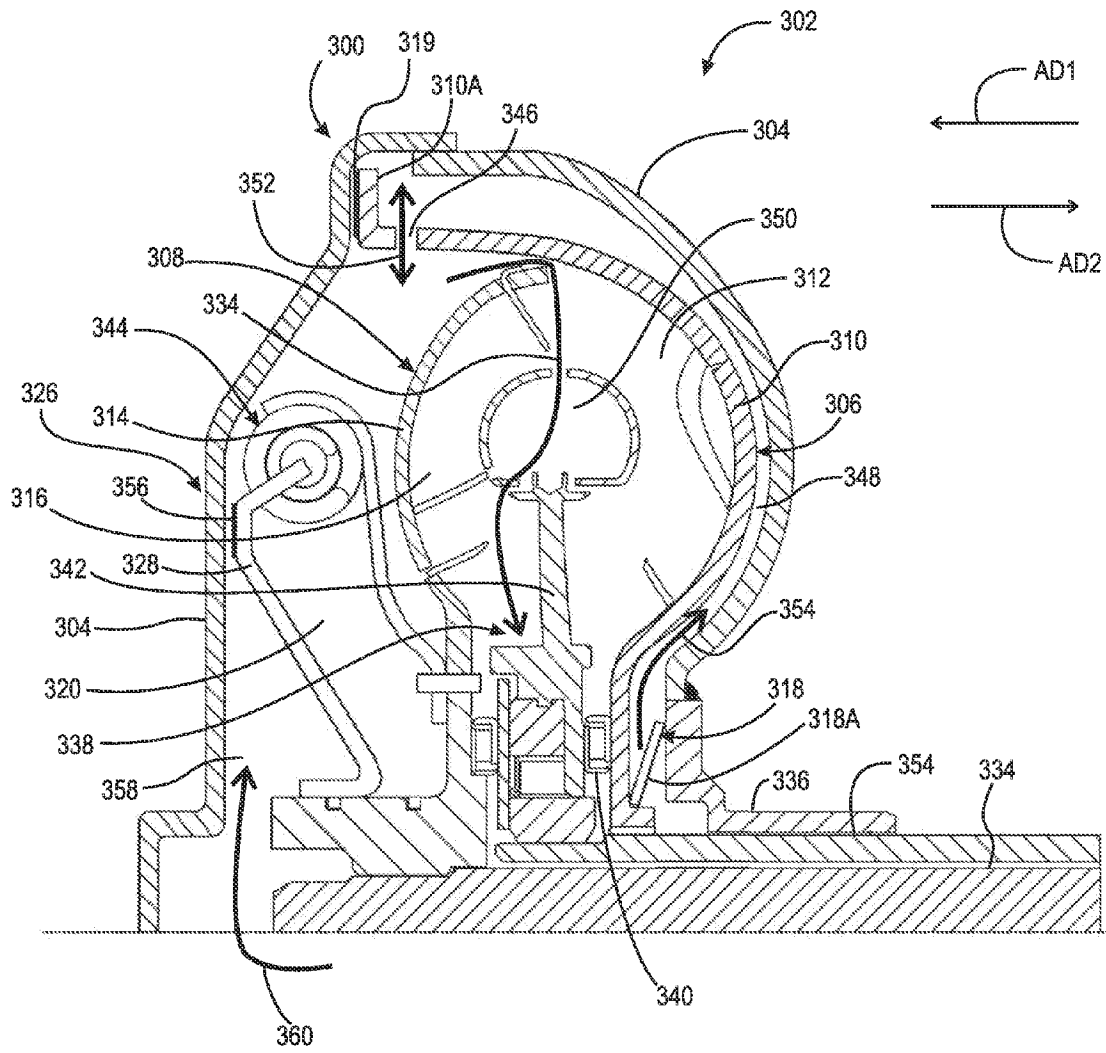


Fig. 6

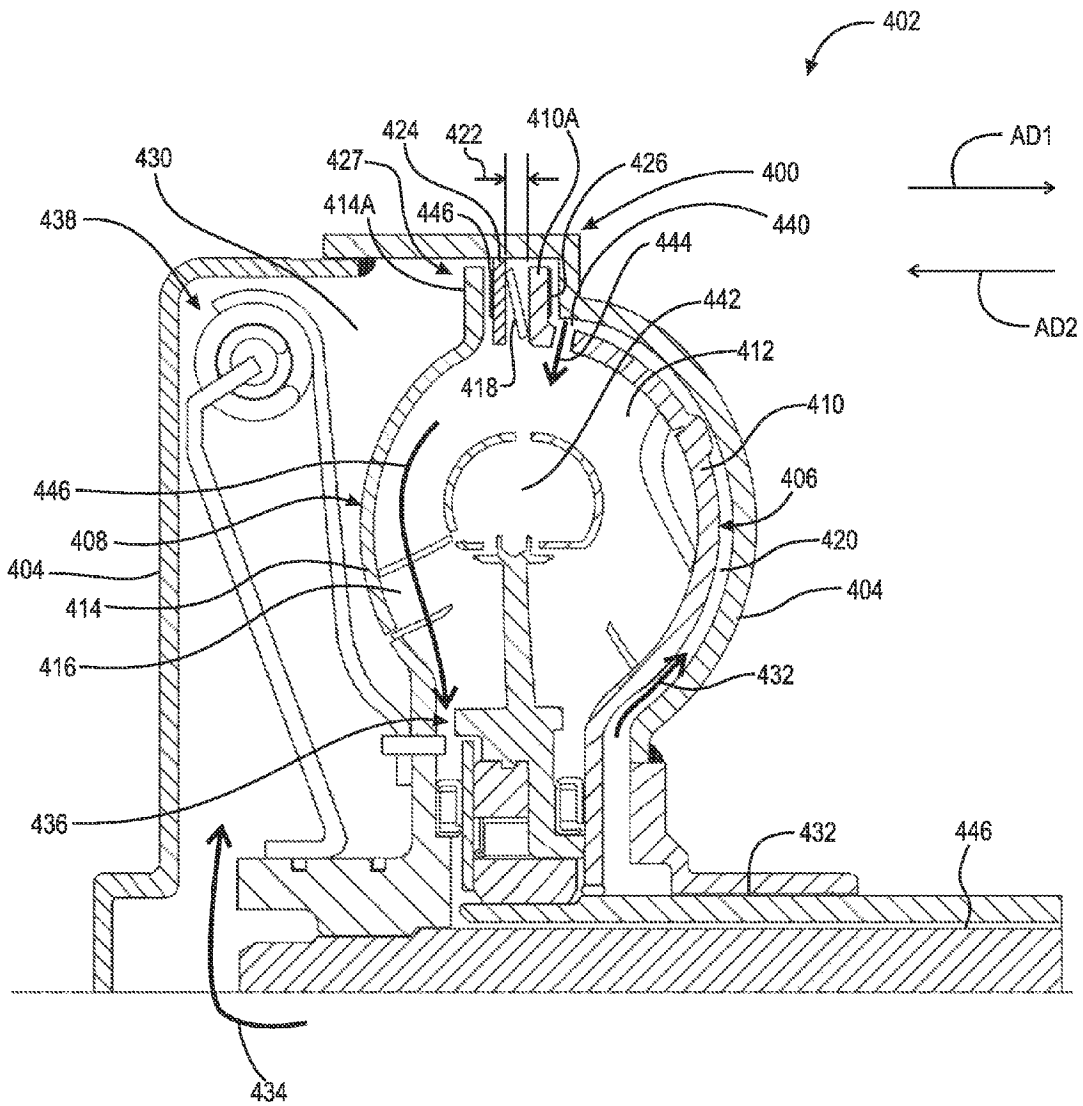


Fig. 7

1

TWO-PASS MULTI-FUNCTION TORQUE CONVERTER WITH NORMALLY CLOSED IMPELLER CLUTCH

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit under 35 U.S.C. §119 (e) of U.S. Provisional Patent Application No. 61/868,876, filed Aug. 22, 2013 which application is incorporated herein by reference in its entirety.

TECHNICAL FIELD

The present disclosure relates to a two-pass multi-function torque converter with a normally closed impeller clutch, in particular, an impeller clutch with a resilient element urging the impeller clutch to a closed position.

BACKGROUND

Multi-function torque converters include an impeller clutch to non-rotatably connect an impeller to a cover for the torque converter, and a torque converter clutch to bypass a turbine. It is known to close the impeller clutch and then to close the torque converter clutch in series. For example, the same fluid circuit can be used to provide apply pressure to close both the impeller clutch and the torque converter clutch. However, this process reduces the pressure bandwidth for both clutches. Further, the torque converter clutch apply pressure for known multi-function torque converters can be higher than in a conventional torque converter when the impeller clutch apply pressure opposes the torque converter clutch apply pressure. As a result, there is a need for higher pressure in the circuit and increased pump capacity, and efficiency of the hydraulic system decreases. In addition, apply pressure must be maintained for the impeller clutch to keep the impeller clutch closed to maintain the function of the torque converter, further increasing the energy requirement for the hydraulic system.

SUMMARY

According to aspects illustrated herein, there is provided a multi-function torque converter, including: a cover arranged to receive torque; an impeller including an impeller shell and at least one impeller blade connected to the impeller shell; a turbine including a turbine shell and at least one turbine blade connected to the turbine shell; and an impeller clutch including a resilient element urging the impeller shell toward the cover to close the impeller clutch and including at least a portion located radially inward of the at least one impeller blade.

According to aspects illustrated herein, there is provided a multi-function torque converter, including: a cover arranged to receive torque; an impeller including an impeller shell and at least one impeller blade connected to the impeller shell; a turbine including a turbine shell and at least one turbine blade connected to the turbine shell; a first pressure chamber including a torus at least partially formed by the turbine and impeller shells; and an impeller clutch including a resilient element urging the impeller shell in a first axial direction to close the impeller clutch and including at least a portion located radially inward of the at least one impeller blade. Fluid pressure in the first pressure chamber is arranged to displace the impeller shell in a second axial direction, oppo-

2

site the first axial direction, to an open position in which the impeller shell is rotatable with respect to the cover.

According to aspects illustrated herein, there is provided a multi-function torque converter, including: a cover arranged to receive torque; an impeller including an impeller shell and at least one impeller blade connected to the impeller shell; a turbine including a turbine shell and at least one turbine blade connected to the turbine shell; a torque converter clutch including an axially displaceable piston; a first pressure chamber at least partially formed by the cover and the impeller shell; a second pressure chamber at least partially formed by the cover, the turbine shell, and the impeller shell; a third pressure chamber at least partially formed by the cover and the axially displaceable piston; a first fluid circuit providing pressurized fluid to the first pressure chamber; a second fluid circuit, separate from the first fluid circuit, providing pressurized fluid to the third pressure chamber; a passive fluid circuit arranged to drain fluid from the second chamber; and an impeller clutch including a resilient element located in the first pressure chamber, urging the impeller shell in a first axial direction to close the impeller clutch to connect the impeller shell to the cover, and including at least a portion located radially inward of the at least one impeller blade. Fluid pressure in the second pressure chamber is arranged to displace the impeller shell in a second axial direction, opposite the first axial direction, to open the impeller clutch, and displace the axially displaceable piston in the first axial direction to close the torque converter clutch to connect the cover to the turbine shell. Fluid pressure in the third pressure chamber is arranged to displace the axially displaceable piston in the second axial direction to open the torque converter clutch.

BRIEF DESCRIPTION OF THE DRAWINGS

Various embodiments are disclosed, by way of example only, with reference to the accompanying schematic drawings in which corresponding reference symbols indicate corresponding parts, in which:

FIG. 1A is a perspective view of a cylindrical coordinate system demonstrating spatial terminology used in the present application;

FIG. 1B is a perspective view of an object in the cylindrical coordinate system of FIG. 1A demonstrating spatial terminology used in the present application;

FIG. 2 is partial cross-sectional view of a multi-function torque converter with a normally closed impeller clutch in a closed position;

FIG. 3 is partial cross-sectional view of the multi-function torque converter of FIG. 2 with the normally closed impeller clutch in an open position;

FIG. 4 illustrates a load-deflection curve for a bi-stable resilient element;

FIG. 5 is partial cross-sectional view of a multi-function torque converter with a normally closed impeller clutch in a closed position;

FIG. 6 is partial cross-sectional view of the multi-function torque converter of FIG. 5 with the normally closed impeller clutch in an open position; and,

FIG. 7 is partial cross-sectional view of a multi-function torque converter, with a normally closed impeller clutch, in an idle mode.

DETAILED DESCRIPTION

At the outset, it should be appreciated that like drawing numbers on different drawing views identify identical, or

functionally similar, structural elements of the disclosure. It is to be understood that the disclosure as claimed is not limited to the disclosed aspects.

Furthermore, it is understood that this disclosure is not limited to the particular methodology, materials and modifications described and as such may, of course, vary. It is also understood that the terminology used herein is for the purpose of describing particular aspects only, and is not intended to limit the scope of the present disclosure.

Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood to one of ordinary skill in the art to which this disclosure belongs. It should be understood that any methods, devices or materials similar or equivalent to those described herein can be used in the practice or testing of the disclosure.

FIG. 1A is a perspective view of cylindrical coordinate system **80** demonstrating spatial terminology used in the present application. The present invention is at least partially described within the context of a cylindrical coordinate system. System **80** has a longitudinal axis **81**, used as the reference for the directional and spatial terms that follow. The adjectives “axial,” “radial,” and “circumferential” are with respect to an orientation parallel to axis **81**, radius **82** (which is orthogonal to axis **81**), and circumference **83**, respectively. The adjectives “axial,” “radial” and “circumferential” also are regarding orientation parallel to respective planes. To clarify the disposition of the various planes, objects **84**, **85**, and **86** are used. Surface **87** of object **84** forms an axial plane. That is, axis **81** forms a line along the surface. Surface **88** of object **85** forms a radial plane. That is, radius **82** forms a line along the surface. Surface **89** of object **86** forms a circumferential plane. That is, circumference **83** forms a line along the surface. As a further example, axial movement or disposition is parallel to axis **81**, radial movement or disposition is parallel to radius **82**, and circumferential movement or disposition is parallel to circumference **83**. Rotation is with respect to axis **81**.

The adverbs “axially,” “radially,” and “circumferentially” are with respect to an orientation parallel to axis **81**, radius **82**, or circumference **83**, respectively. The adverbs “axially,” “radially,” and “circumferentially” also are regarding orientation parallel to respective planes.

FIG. 1B is a perspective view of object **90** in cylindrical coordinate system **80** of FIG. 1A demonstrating spatial terminology used in the present application. Cylindrical object **90** is representative of a cylindrical object in a cylindrical coordinate system and is not intended to limit the present invention in any manner. Object **90** includes axial surface **91**, radial surface **92**, and circumferential surface **93**. Surface **91** is part of an axial plane, surface **92** is part of a radial plane, and surface **93** is a circumferential surface.

FIG. 2 is partial cross-sectional view of a multi-function torque converter with normally closed impeller clutch **100** in a closed position.

FIG. 3 is partial cross-sectional view of the multi-function torque converter of FIG. 2 with normally closed impeller clutch **100** in an open position. The following should be viewed in light of FIGS. 2 and 3. Multi-function torque converter **102** includes cover **104** arranged to receive torque from a prime mover such as an engine, for example, impeller **106**, and turbine **108**. Impeller **106** includes impeller shell **110**, and at least one impeller blade **112** connected to the impeller shell. Turbine **106** includes turbine shell **114** and at least one turbine blade **116** connected to the turbine shell. Clutch **100** includes resilient element **118** and friction material **119**. Element **118** urges the impeller shell into a closed position non-rotatably connecting impeller shell **110**, friction material **119**,

and cover **104**. Element **118** includes portion **118A** located radially inward of impeller blade **112**.

In an example embodiment, torque converter **102** includes pressure chamber **120** at least partially formed by cover **104** and impeller shell **110**. Resilient element **118** urges impeller shell **118** in axial direction **AD1** away from turbine shell **114** to close clutch **100**. Fluid pressure in pressure chamber **120** is arranged to displace the impeller shell in axial direction **AD2**, opposite the axial direction **AD1**, to axially compress the resilient element (reduce axial extent **122** of the resilient element) to an open position for clutch **100** in which impeller shell **110** is rotatable with respect to the cover.

FIG. 4 illustrates load-deflection curve **200** for a bi-stable resilient element. The following should be viewed in light of FIGS. 2 through 4. The X axis for curve **200** is travel, or axial compression for element **118**. The Y axis for curve **200** is force applied by element **118** on the impeller shell. In an example embodiment, element **118** is a diaphragm spring or a bi-stable resilient element. When torque converter **102** is assembled, element **118** is compressed, or preloaded, to a point in region **204** near point **202**. To transition from the closed position to the open position for the clutch shown in FIG. 3, the fluid pressure in chamber **120** is increased from a first magnitude to a second magnitude to progressively displace the impeller shell in axial direction **AD2** to progressively axially compress the resilient element to an intermediate axial extent (analogous to point **202** on curve **200**) between axial extent **112** shown in FIG. 2 and axial extent **124** shown in FIG. 3. The resilient element exerts a progressively greater force, in axial direction **AD1**, on the impeller shell as element **118** is compressed. This is analogous to region **204** of curve **200**. The pressure in chamber **120** continues to displace the impeller shell in direction **AD2** to compress element **118** past the intermediate extent. At that point element **118** exerts less force in the axial direction **AD1** (entering region **206** of curve **200**) as element **118** is further compressed. Since progressively less force is required to compress element **118** in region **206**, as element **118** enters region **206**, the fluid pressure can be decreased from the second magnitude to a third magnitude. The fluid pressure continues to progressively displace the impeller shell in axial direction **AD2**, and the force exerted by the resilient element in axial direction **AD1** on the impeller shell continues to decrease. When the third magnitude is approximately equal to the first magnitude (point **208**), relatively low pressure is required to hold element **118** in a compressed position with clutch **100** open as shown in FIG. 3.

In an example embodiment, the multi-function torque converter includes torque converter clutch **126** with piston **128** and pressure chamber **130** at least partially formed by the turbine shell. Clutch **126** is arranged to connect the cover to the turbine shell and by-pass the impeller shell. That is, torque flows from the cover to the turbine shell through the torque converter clutch without passing through the impeller shell. Fluid circuit **132** is arranged to provide pressurized fluid to pressure chamber **120** to displace the impeller shell to open clutch **100** such that the impeller shell is rotatable with respect to the cover. Fluid circuit **134** is arranged to provide pressurized fluid to pressure chamber **130** to close the torque converter clutch to connect the cover to the turbine shell.

Advantageously, circuit **134** is the only fluid circuit in the torque converter used in the closing of the impeller clutch and the torque converter clutch. Specifically, since element **118** is used to close impeller clutch **100**, it is not necessary to supply pressurized fluid to close clutch **100**. Thus, the pressure bandwidth problem and the efficiency and energy requirement problems for the hydraulic system, noted above, are eliminated.

5

In an example embodiment, the multi-function torque converter includes pump hub **136** non-rotatably connected to the cover and arranged to engage and drive a pump for a transmission. At least a portion of the resilient element is axially disposed between the impeller shell and the pump hub.

In an example embodiment, the multi-function torque converter includes stator **138** and bearing **140**. Stator **138** is axially located between the turbine and the impeller and includes at least one stator blade **142**. At least portion **118A** of the resilient element is axially located between the stator and the impeller shell. In an example embodiment, element **118** reacts against bearing **140** to urge the impeller shell in direction **AD1**. In an example embodiment, the multi-function torque converter includes vibration damper **144**.

In an example embodiment, the impeller shell includes passageway **146** through the material forming the impeller shell, wholly surrounded by the material, and opening to pressure chamber **120** and torus **148** formed by the impeller and the turbine. Passageway **146** provides flow path **150** between the torus and the pressure chamber.

In torque converter mode (clutch **100** is closed and clutch **126** is open), fluid pressure in circuit **132** and chamber **120** is low, fluid pressure in circuit **134** and chamber **130** is substantial equal to zero or is negative, and element **118** urges the impeller shell in direction **AD1** to close clutch **100**. Flow in flow path **150** is from chamber **120** to the torus for cooling purposes.

To close clutch **126** for torque converter clutch mode, fluid pressure in circuit **134** and chamber **130** is increased to a high value to non-rotatably engage piston **128**, friction material **152**, and cover **104**. Clutch **100** remains closed and flow in flow path **150** is from the torus to chamber **120** for cooling purposes. In idle disconnect mode (clutches **100** and **126** each open), pressure in fluid circuit **132** and chamber **120** is increased to a high value to open clutch **100**, and fluid pressure in circuit **134** and chamber **130** is decreased to zero or a negative value, opening clutch **126**. Flow in flow path **150** is from chamber **120** to the torus for cooling purposes. Fluid also flows between extension **110A** and the cover into chamber **130**. To open clutch **126**, fluid pressure in chamber **154** is increased via fluid circuit **156**. Fluid pressure in chamber **154** and circuit **156** is decreased to close clutch **126**.

FIG. **5** is partial cross-sectional view of a multi-function torque converter with normally closed impeller clutch **300** in an open position.

FIG. **6** is partial cross-sectional view of the multi-function torque converter of FIG. **5** with normally closed impeller clutch **300** in a closed position. Multi-function torque converter **302** includes cover **304** arranged to receive torque from a prime mover, impeller **306**, and turbine **308**. Impeller **306** includes impeller shell **310**, and at least one impeller blade **312** connected to the impeller shell. Turbine **306** includes turbine shell **314** and at least one turbine blade **316** connected to the turbine shell. Clutch **300** includes resilient element **318** and friction material **319**. Element **318** urges the impeller shell into a closed position connecting impeller shell **310** with cover **304**. The connection between impeller shell **310** and cover **304** is substantially non-rotatable; however, it should be understood that some slip may occur between shell **310** and cover **304** when the impeller clutch is closed. Element **318** includes portion **318A** located radially inward of impeller blade **312**.

Resilient element **318** urges impeller shell **318** in axial direction **AD1** toward turbine shell **314** to close clutch **300**. In an example embodiment, torque converter **302** includes chamber **320** at least partially formed by the cover, the turbine shell, and the impeller shell. Fluid pressure in pressure cham-

6

ber **320** is arranged to displace the impeller shell in axial direction **AD2**, opposite the axial direction **AD1**, to an open position for clutch **300** in which impeller shell **310** is rotatable with respect to the cover.

In an example embodiment, element **318** is a diaphragm spring or a bi-stable resilient element. The discussion regarding **218** as a bi-stable resilient element is applicable to element **318**.

In an example embodiment, the multi-function torque converter includes torque converter clutch **326** with axially displaceable piston **328**. Clutch **326** is arranged to connect the cover to the turbine shell and by-pass the impeller shell. That is, torque flows from the cover to the turbine shell through the torque converter clutch without passing through the impeller shell. The connection between piston **328** and cover **304** is substantially non-rotatable; however, it should be understood that some slip may occur between piston **328** and cover **304** when the torque converter clutch is closed. Fluid circuit **360** is arranged to provide pressurized fluid to pressure chamber **320** to displace the impeller shell to open clutch **300** such that the impeller shell is rotatable with respect to the cover, and to pressure chamber **358** to displace piston **328** to open clutch **326** such that the turbine shell is rotatable with respect to the cover. Fluid circuit **354** is arranged to provide pressurized fluid to pressure chamber **320** through chamber **348**, at least partially formed by shell **310** and cover **304**, and passageway **346** to close the torque converter clutch to connect the cover to the turbine shell. Passageway **346** is through the material forming the impeller shell and wholly surrounded by the material.

Advantageously, circuit **354** is the only fluid circuit in the torque converter used in the closing of the impeller clutch and torque converter clutches. Specifically, since element **318** is used to close impeller clutch **300**, it is not necessary to supply pressurized fluid to close clutch **300**. Thus, the pressure bandwidth problem and the efficiency and energy requirement problems for the hydraulic system, noted above, are eliminated.

In an example embodiment, the multi-function torque converter includes pump hub **336** non-rotatably connected to the cover and arranged to engage and drive a pump for a transmission. At least a portion of the resilient element is axially disposed between the impeller shell and the pump hub. Element **318** reacts against the pump hub to urge the impeller shell in direction **AD1**. That is, element **318** is located in chamber **348** described below.

In an example embodiment, the multi-function torque converter includes stator **338** axially located between the turbine and the impeller and including bearing **340** and at least one stator blade **342**. At least portion **318A** of the resilient element is axially located between hub **336** and the impeller shell. In an example embodiment, the multi-function torque converter includes vibration damper **344**. Friction material **319** is axially disposed between the cover and the impeller shell and radially aligned with the turbine shell or the vibration damper.

In an example embodiment, chamber **320** which includes torus **350**, at least partially formed by shells **310** and **314**. Passageway **346** provides flow path **352** between pressure chamber **348** and torus **350**.

In torque converter mode (clutch **300** is closed and clutch **326** is open), fluid pressure in circuit **354**, chamber **348**, and chamber **320**, is low, and element **318** urges clutch **300** closed. To close clutch **326** for torque converter clutch mode, fluid pressure in circuit **354** and chamber **348** is increased, increasing fluid pressure in chamber **320** through flow path **352** in passage **346** to a high value to engage piston **328**, friction material **356** for clutch **326**, and cover **304**. Clutch

7

300 remains closed. In idle disconnect mode (clutches **300** and **326** each open), pressure in fluid circuit **360** and chamber **358** is increased to a high value to open clutch **300** and clutch **326**. That is, to open clutch **326**, fluid pressure in chamber **358** is increased via fluid circuit **360**. Fluid flows from chamber **348** to chamber **320**. Fluid drains from chamber **320** and torus **350** via passive fluid circuit **334**. To re-close clutch **326**, fluid pressure in chamber **358** and circuit **360** is decreased, and/or fluid pressure in chamber **320** and circuit **354** is increased.

FIG. 7 is partial cross-sectional view of a multi-function torque converter, with normally closed impeller clutch **400**, in an idle mode. By “idle mode” we mean both clutch **400** and a torque converter clutch are open. Multi-function torque converter **402** includes cover **404** arranged to receive torque from a prime mover, impeller **406**, and turbine **408**. Impeller **406** includes impeller shell **410**, and at least one impeller blade **412** connected to the impeller shell. Turbine **406** includes turbine shell **414** and at least one turbine blade **416** connected to the turbine shell. Clutch **400** includes resilient element **418** urging the impeller shell into a closed position connecting impeller shell **410** with cover **404**. The connection between impeller shell **410** and cover **404** is substantially non-rotatable; however, it should be understood that some slip may occur between shell **410** and cover **404** when the impeller clutch is closed. Element **418** is located radially outward of blades **412** and **416**.

In an example embodiment, torque converter **402** includes pressure chamber **420** at least partially formed by cover **404** and impeller shell **410**. Resilient element **418** urges impeller shell **418** in axial direction AD1 away from turbine shell **414** to close clutch **400**. Fluid pressure in pressure chamber **420** is arranged to displace the impeller shell in axial direction AD2, opposite the axial direction AD1, to an open position for clutch **400** in which impeller shell **410** is rotatable with respect to the cover.

In an example embodiment, element **418** is a diaphragm spring or a bi-stable resilient element. The discussion regarding element **218** as a bi-stable element is applicable to element **418**.

In an example embodiment, the impeller clutch includes radial extension **410A** of the impeller shell; backing plate **424** non-rotatably connected to the cover, and friction material **426** located between the extension **410A** and the cover. In the closed position for the impeller clutch, extension **410A**, friction material **426**, and cover **404** are engaged.

In an example embodiment, the multi-function torque converter includes torque converter clutch **427** with radial extension **414A** of shell **414**. Pressure chamber **430** is at least partially formed by the cover and the turbine shell. Clutch **427** is arranged to connect the cover to the turbine shell and by-pass the fluid connection between the turbine shell and the impeller shell. That is, torque flows from the cover directly to the turbine shell through the torque converter clutch. Fluid circuit **432** is arranged to provide pressurized fluid to pressure chamber **420** to displace the impeller shell in direction AD2 to open clutch **400** such that the impeller shell is rotatable with respect to the cover. Fluid circuit **434** is arranged to provide pressurized fluid to pressure chamber **430** to close the torque converter clutch to connect the cover to the turbine shell.

Advantageously, circuit **434** is the only fluid circuit in the torque converter used in the closing of the impeller clutch and the torque converter clutch. Specifically, since element **418** is used to close impeller clutch **400**, it is not necessary to supply pressurized fluid to close clutch **400**. Thus, the pressure bandwidth problem and the efficiency and energy requirement problems for the hydraulic system, noted above, are eliminated.

8

In an example embodiment, the multi-function torque converter includes stator **436**. In an example embodiment, the multi-function torque converter includes vibration damper **438**.

In an example embodiment, the impeller shell includes passageway **440** through the material forming the impeller shell, wholly surrounded by the material, and opening to pressure chamber **420** and torus **442** formed by the impeller and the turbine. Passageway **440** provides flow path **444** between the torus and pressure chamber **420**.

In torque converter mode (clutch **400** is closed and clutch **427** is open), fluid pressure in circuit **432** and chamber **420** is low, fluid pressure in circuit **434** and chamber **430** is low, and element **418** urges clutch **400** closed. Flow in flow path **444** is from chamber **420** to the torus. Fluid pressure in the torus is equal to or greater than fluid pressure in chamber **430**. For torque converter clutch mode, fluid pressure in circuit **432** and chamber **420** is high to open clutch **400**. Fluid pressure in circuit **434** and chamber **430** is increased to a high value to non-rotatably engage extension **414A**, friction material **446**, and plate **424**. Pressure in chamber **430** is higher than pressure in torus **442** and flow path **444** is from chamber **420** to the torus. Fluid drains from the torus through passive fluid circuit **446**. In idle disconnect mode (clutches **400** and **427** each open), pressure in fluid circuit **432** and chamber **420** is increased to a high value to open clutch **400** and fluid pressure in circuit **434** and chamber **430** is equal to or lower than pressure in the torus to open clutch **427**. Flow in flow path **444** is from chamber **420** to the torus. Fluid also flows between extension **414A** and the cover into chamber **430**. To open clutch **427**, fluid pressure in fluid circuit **434** and chamber **430** is lowered and fluid pressure in torus **442** is increased via fluid circuit **432**, chamber **420**, and passageway **440**.

It will be appreciated that various of the above-disclosed and other features and functions, or alternatives thereof, may be desirably combined into many other different systems or applications. Various presently unforeseen or unanticipated alternatives, modifications, variations, or improvements therein may be subsequently made by those skilled in the art which are also intended to be encompassed by the following claims.

What I claim is:

1. A multi-function torque converter, comprising:
 - a cover arranged to receive torque;
 - an impeller including an impeller shell and at least one impeller blade connected to the impeller shell;
 - a turbine including a turbine shell and at least one turbine blade connected to the turbine shell; and,
 - an impeller clutch including a resilient element:
 - urging the impeller shell toward the cover to close the impeller clutch; and,
 - including at least a portion located radially inward of the at least one impeller blade.
2. The multi-function torque converter of claim 1, further comprising:
 - a pressure chamber at least partially formed by the cover and the impeller shell, wherein:
 - the resilient element is located in the pressure chamber.
3. The multi-function torque converter of claim 1, further comprising:
 - a pressure chamber at least partially formed by the cover, the turbine shell, and the impeller shell; and,
 - a fluid circuit arranged to supply pressurized fluid to the pressure chamber to open the impeller clutch so that the impeller shell is rotatable with respect to the cover.
4. The multi-function torque converter of claim 1, further comprising:

9

a pressure chamber at least partially formed by the cover, the turbine shell, and the impeller shell; and, a passive fluid circuit arranged to drain fluid from the pressure chamber.

5 **5.** The multi-function torque converter of claim 1, further comprising:

a vibration damper, wherein:

the impeller clutch includes friction material axially disposed between the cover and the impeller shell and radially aligned with the turbine shell or the vibration damper.

6. The multi-function torque converter of claim 1, wherein: the resilient element urges the impeller shell toward the turbine.

7. The multi-function torque converter of claim 1, further comprising:

a pressure chamber at least partially formed by the cover, the turbine shell, and the impeller shell, wherein:

the resilient element urges the impeller shell in a first axial direction; and,

fluid pressure in the pressure chamber is arranged to displace the impeller shell in a second axial direction, opposite the first axial direction, to an open position in which the impeller shell is rotatable with respect to the cover.

8. The multi-function torque converter of claim 7, wherein: the resilient element is a diaphragm spring or a bi-stable resilient element;

when the impeller clutch is in the closed position, the fluid pressure in the pressure chamber is arranged to increase from a first magnitude to displace the impeller shell in the second axial direction to progressively compress the resilient element;

when the fluid pressure in the pressure chamber increases to a second magnitude greater than the first magnitude, the resilient element is compressed to a first extent and the impeller clutch opens;

the fluid pressure in the pressure chamber is arranged to decrease from the second magnitude while continuing to compress the resilient element and keep the impeller clutch open; and,

to close the clutch, the fluid pressure in the pressure chamber is arranged to decrease to a third magnitude at which point the resilient element is arranged to displace the impeller shell in the first axial direction to close the impeller clutch.

9. The multi-function torque converter of claim 1, further comprising:

a first pressure chamber at least partially formed by the cover and the impeller shell;

a second pressure chamber at least partially formed by the cover, the turbine shell, and the impeller shell;

a passageway through the material forming the impeller shell, wholly surrounded by the material, and connecting the first and second pressure chambers;

a torque converter clutch; and,

a first fluid circuit arranged to supply pressurized fluid to the second pressure chamber via the first pressure chamber and the passageway to close the torque converter clutch to connect the cover to the turbine shell, wherein: the first fluid circuit is the only fluid circuit used to provide pressurized fluid for closing the torque converter clutch.

10. The multi-function torque converter of claim 9, wherein the torque converter clutch includes an axially displaceable piston, the torque converter further comprising:

a third pressure chamber at least partially formed by the cover and the axially displaceable piston; and,

10

a second fluid circuit, separate from the first fluid circuit, arranged to supply pressurized fluid to the third pressure chamber to axially displace the axially displaceable piston to open the torque converter clutch.

11. The multi-function torque converter of claim 10, the second fluid circuit is arranged to supply pressurized fluid to the second pressure chamber to open the impeller clutch.

12. A multi-function torque converter, comprising:

a cover arranged to receive torque;

an impeller including an impeller shell and at least one impeller blade connected to the impeller shell;

a turbine including a turbine shell and at least one turbine blade connected to the turbine shell;

a first pressure chamber at least partially formed by the cover, the turbine shell, and the impeller shell; and,

an impeller clutch including a resilient element: urging the impeller shell in a first axial direction to close the impeller clutch; and,

including at least a portion located radially inward of the at least one impeller blade, wherein:

fluid pressure in the first pressure chamber is arranged to displace the impeller shell in a second axial direction, opposite the first axial direction, to an open position in which the impeller shell is rotatable with respect to the cover.

13. The multi-function torque converter of claim 12, further comprising:

a passive fluid circuit arranged to drain fluid from the first pressure chamber.

14. The multi-function torque converter of claim 12, further comprising:

a vibration damper, wherein:

the impeller clutch includes friction material axially disposed between the cover and the impeller shell and radially aligned with the turbine shell or the vibration damper.

15. The multi-function torque converter of claim 12, wherein:

the resilient element is a diaphragm spring or a bi-stable resilient element;

when the impeller clutch is in the closed position, the fluid pressure in the first pressure chamber is arranged to increase from a first magnitude to displace the impeller shell in the second axial direction to progressively compress the resilient element;

when the fluid pressure in the first pressure chamber increases to a second magnitude greater than the first magnitude, the resilient element is compressed to a first extent and the impeller clutch opens;

the fluid pressure in the first pressure chamber is arranged to decrease from the second magnitude while continuing to compress the resilient element and keep the impeller clutch open; and,

to close the clutch, the fluid pressure in the first pressure chamber is arranged to decrease to a third magnitude at which point the resilient element is arranged to displace the impeller shell in the first axial direction to close the impeller clutch.

16. The multi-function torque converter of claim 12, further comprising:

a second pressure chamber at least partially formed by the cover and the impeller shell;

a first fluid circuit arranged to provide pressurized fluid to the second pressure chamber;

a passageway through the material forming the impeller shell, wholly surrounded by the material, and connecting the first and second pressure chambers; and,

11

a torque convert clutch, wherein:

the first fluid circuit is arranged to provide the pressurized fluid to the first pressure chamber, via the second pressure chamber and the passageway to close the torque converter clutch to connect the cover to the turbine shell; and,

the first fluid circuit is the only fluid circuit used to provide pressurized fluid for closing the torque converter clutch and the impeller clutch.

17. The multi-function torque converter of claim 16, wherein the torque converter clutch includes an axially displaceable piston, the torque converter further comprising:

a third pressure chamber at least partially formed by the cover and the piston; and,

a second fluid circuit, separate from the first fluid circuit, arranged to supply pressurized fluid to the third pressure chamber to axially displace the piston to open the torque converter clutch.

18. The multi-function torque converter of claim 17, wherein the second fluid circuit is arranged to supply pressurized fluid to the first pressure chamber to open the impeller clutch.

19. A multi-function torque converter, comprising:

a cover arranged to receive torque;

an impeller including an impeller shell and at least one impeller blade connected to the impeller shell;

a turbine including a turbine shell and at least one turbine blade connected to the turbine shell;

a torque converter clutch including an axially displaceable piston;

a first pressure chamber at least partially formed by the cover and the impeller shell;

a second pressure chamber at least partially formed by the cover, the turbine shell, and the impeller shell;

a third pressure chamber at least partially formed by the cover and the axially displaceable piston;

a first fluid circuit providing pressurized fluid to the first pressure chamber;

12

a second fluid circuit, separate from the first fluid circuit, providing pressurized fluid to the third pressure chamber;

a passive fluid circuit arranged to drain fluid from the second chamber; and,

an impeller clutch including a resilient element:

located in the first pressure chamber;

urging the impeller shell in a first axial direction to close the impeller clutch to connect the impeller shell to the cover; and,

including at least a portion located radially inward of the at least one impeller blade, wherein:

fluid pressure in the second pressure chamber is arranged to:

displace the impeller shell in a second axial direction, opposite the first axial direction, to open the impeller clutch; and,

displace the axially displaceable piston in the first axial direction to close the torque converter clutch to connect the cover to the turbine shell; and,

fluid pressure in the third pressure chamber is arranged to displace the axially displaceable piston in the second axial direction to open the torque converter clutch.

20. The multi-function torque converter of claim 19, wherein:

the impeller shell includes a passageway through material forming the impeller shell;

the first fluid circuit is arranged to provide pressurized fluid to the second chamber via the first pressurized chamber and the passageway to close the torque converter clutch;

the second fluid circuit is arranged to provide pressurized fluid to the second chamber to open the impeller clutch; and,

the first and second fluid circuits are the only fluid circuits used to provide pressurized fluid to the torque converter.

* * * * *