



US009506379B2

(12) **United States Patent**
Dupuis

(10) **Patent No.:** **US 9,506,379 B2**

(45) **Date of Patent:** ***Nov. 29, 2016**

(54) **CONCENTRIC CAMSHAFT PHASER**

(56) **References Cited**

(71) Applicant: **Schaeffler Technologies AG & Co.**
KG, Herzogenaurach (DE)

U.S. PATENT DOCUMENTS

(72) Inventor: **Craig Dupuis**, Windsor (CA)

6,763,791 B2 7/2004 Gardner et al.
6,932,039 B2* 8/2005 Takahashi F01L 1/02
123/90.15

(73) Assignee: **Schaeffler Technologies AG & Co.**
KG, Herzogenaurach (DE)

8,122,863 B2 2/2012 Myers
8,146,551 B2* 4/2012 Pluta F01L 1/3442
123/90.15

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

8,191,521 B2* 6/2012 Kandolf F01L 1/3442
123/90.15
8,627,795 B2* 1/2014 Kapp F01L 1/34
123/90.15

This patent is subject to a terminal disclaimer.

2008/0283010 A1 11/2008 Bohner et al.
2010/0089353 A1 4/2010 Myers et al.

OTHER PUBLICATIONS

(21) Appl. No.: **14/201,214**

Kandolf et al., Camshaft Phase Adjuster for Concentric Camshafts, US Patent Application Pub. 2010/0186700 A1, Jul. 29, 2010.*
Christopher J. Pluta, Concentric Cam with Phaser, US Patent Application Pub. 2010/0186698 A1, Jul. 29, 2010.*
Wigsten et al., Concentric Camshaft Phaser Torsional Drive Mechanism, US Patent Application Pub. 2014/0158074 A1, Jun. 12, 2014.*

(22) Filed: **Mar. 7, 2014**

(65) **Prior Publication Data**

US 2014/0251249 A1 Sep. 11, 2014

Related U.S. Application Data

(60) Provisional application No. 61/775,904, filed on Mar. 11, 2013.

* cited by examiner

(51) **Int. Cl.**

F01L 1/34 (2006.01)

F01L 1/344 (2006.01)

F01L 1/047 (2006.01)

Primary Examiner — Ching Chang

(74) *Attorney, Agent, or Firm* — Simpson & Simpson, PLLC

(52) **U.S. Cl.**

CPC **F01L 1/344** (2013.01); **F01L 1/047** (2013.01); **F01L 1/3442** (2013.01); **F01L 2001/0473** (2013.01); **F01L 2001/34496** (2013.01); **Y10T 29/49293** (2015.01)


(57) **ABSTRACT**

A concentric cam shaft phaser, including: a first camshaft; a second camshaft located radially inside of the first camshaft; a control gear in contact with the first camshaft and fixedly connected to the first camshaft by a weld, a press fit, or a shrink fit; a rotor non-rotatably connected to the second camshaft; and a stator non-rotatably connected to the control gear.

(58) **Field of Classification Search**

CPC F01L 1/047; F01L 1/344; F01L 1/3442; F01L 2001/0473; F01L 2001/34496
USPC 123/90.17, 90.27, 90.31
See application file for complete search history.

19 Claims, 7 Drawing Sheets

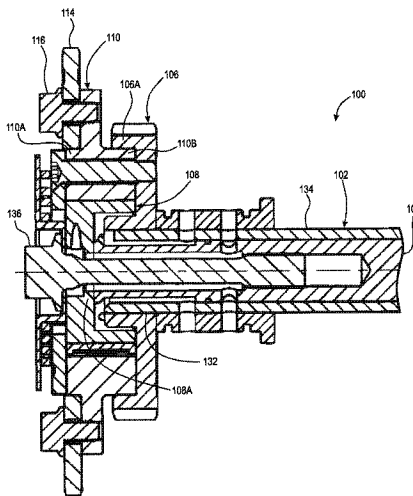

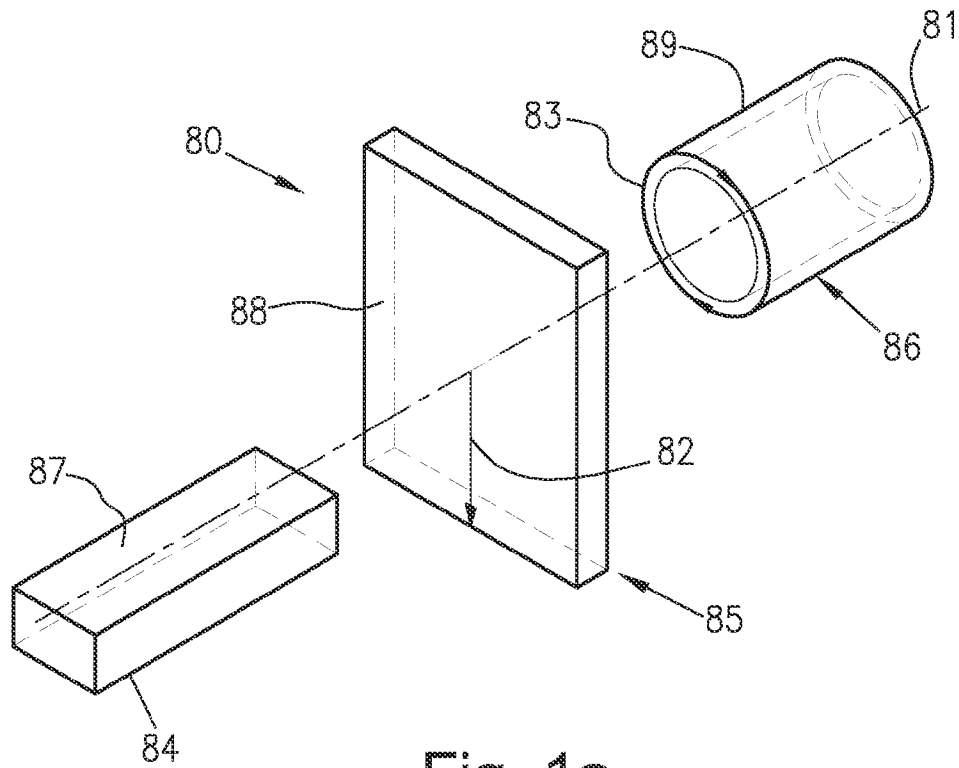


Fig. 1a

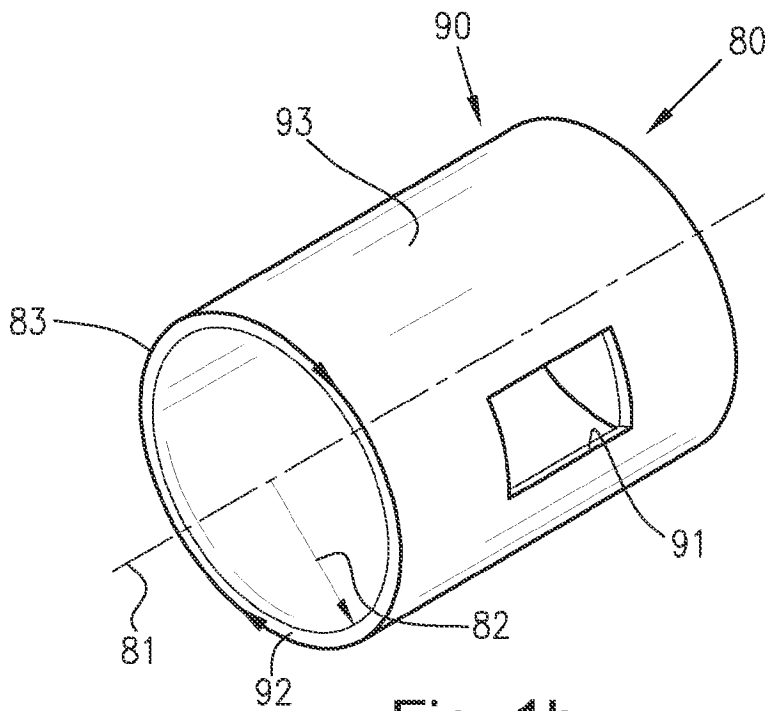


Fig. 1b

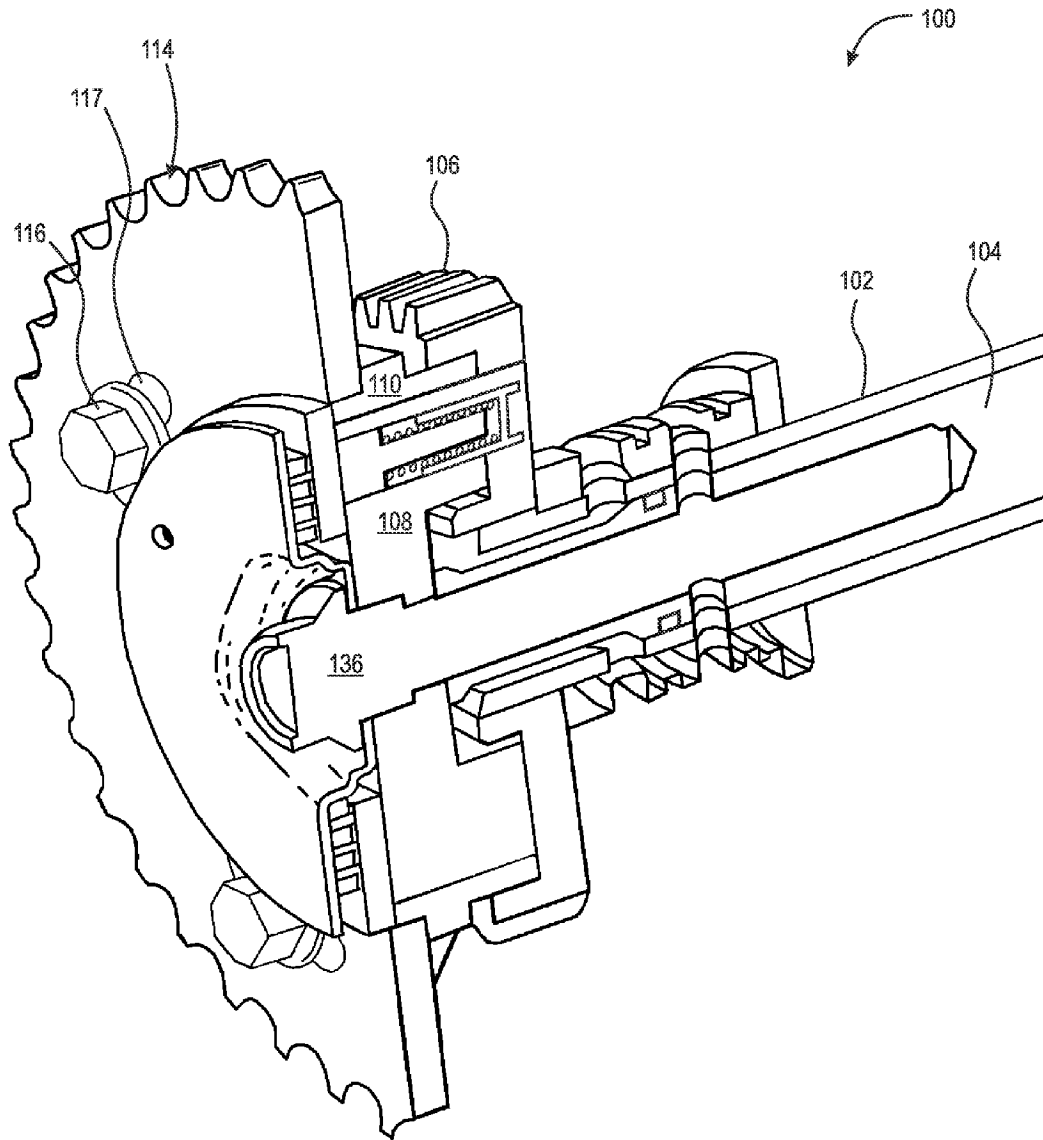


Fig. 2

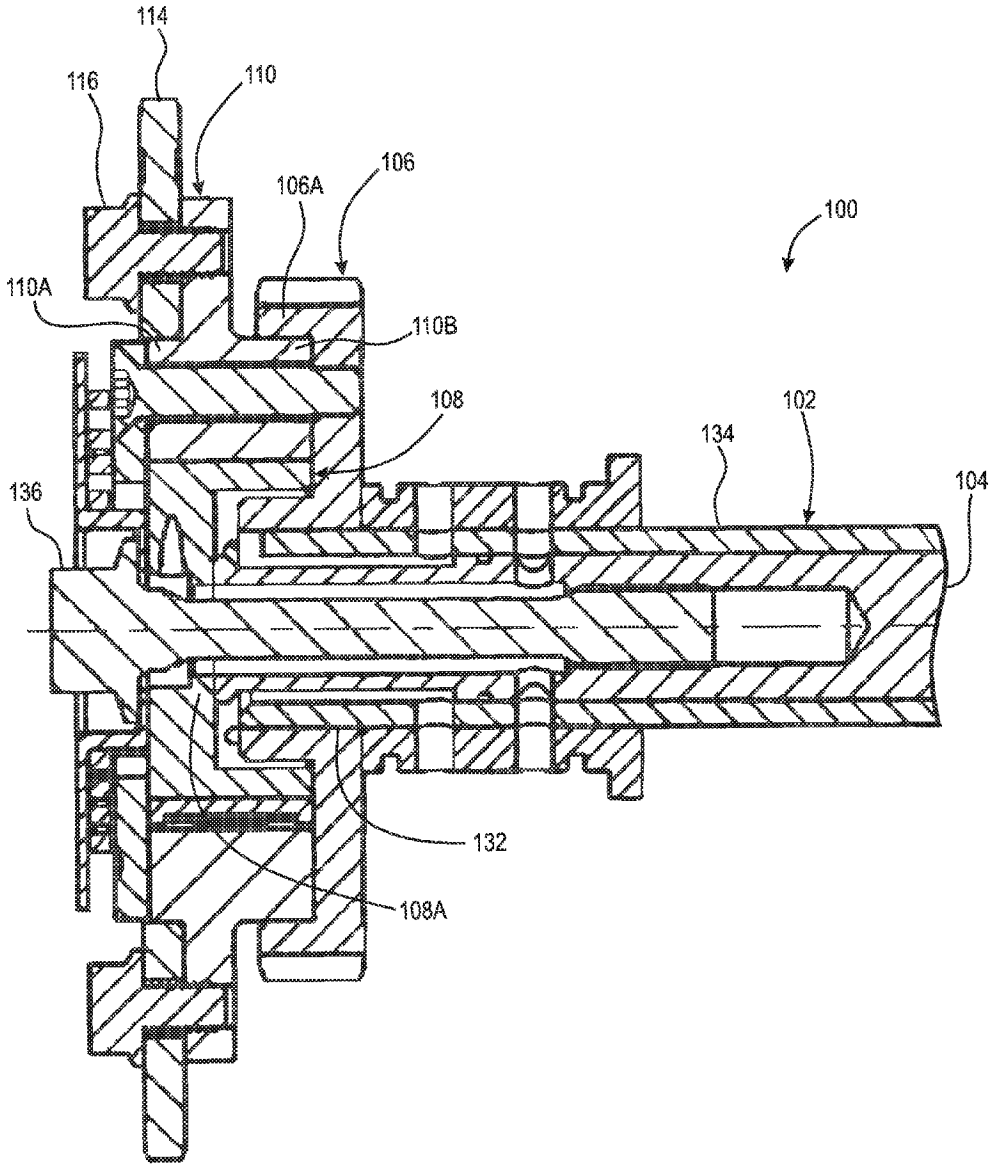


Fig. 3

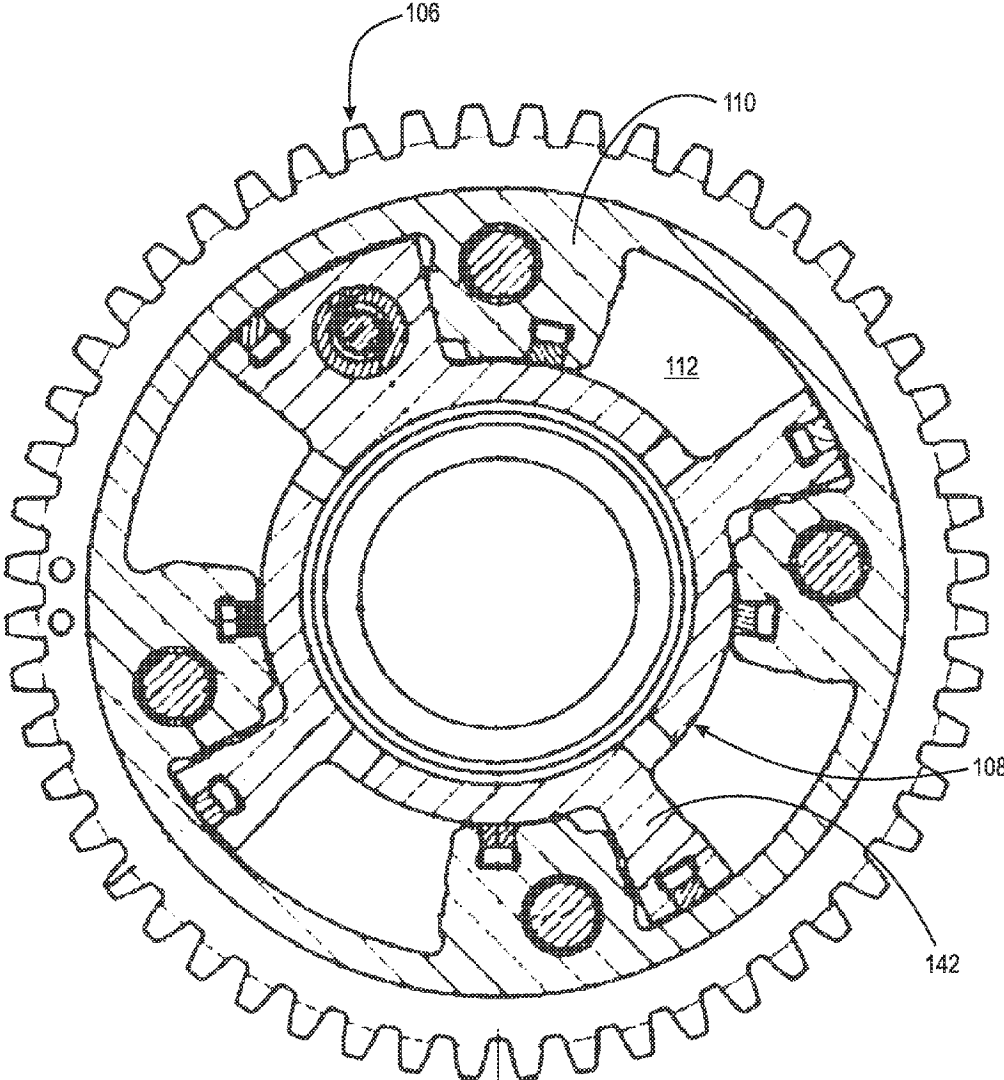


Fig. 4

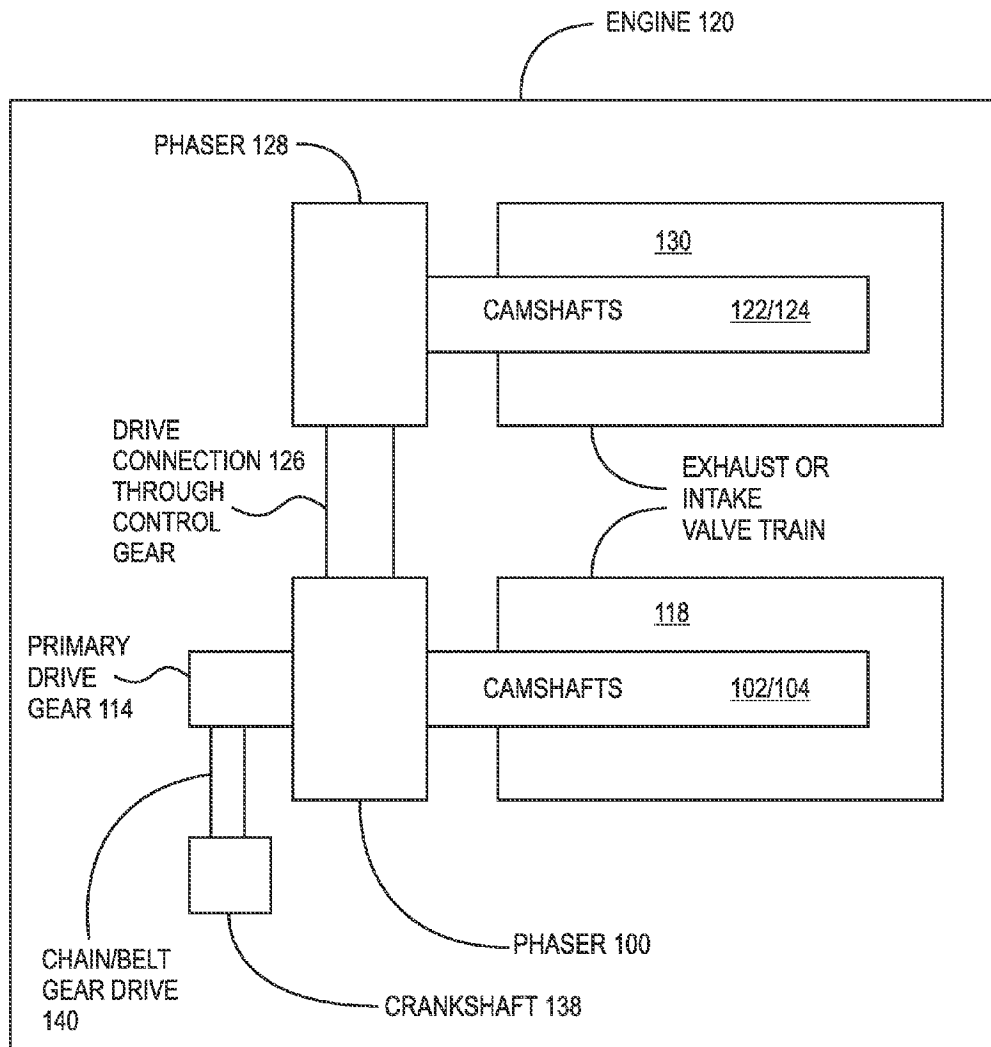


Fig. 5

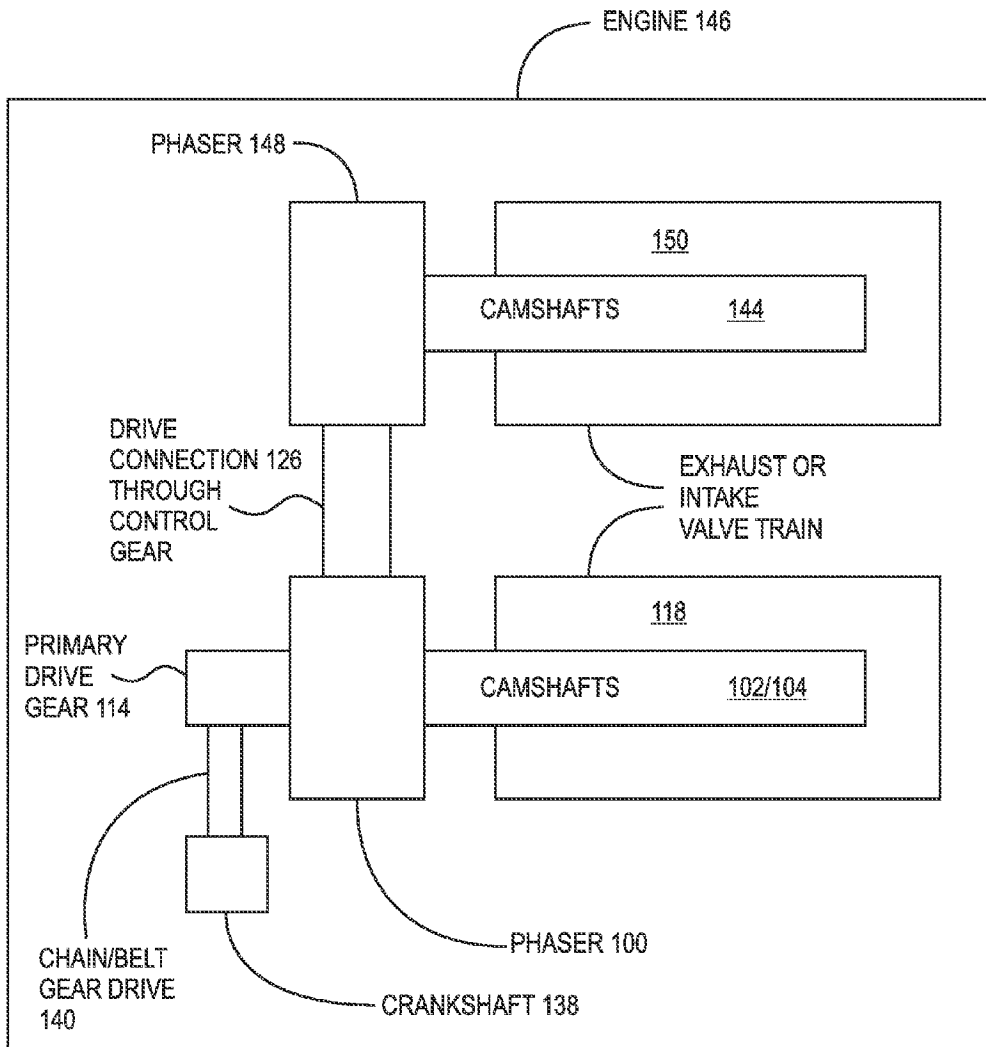


Fig. 6

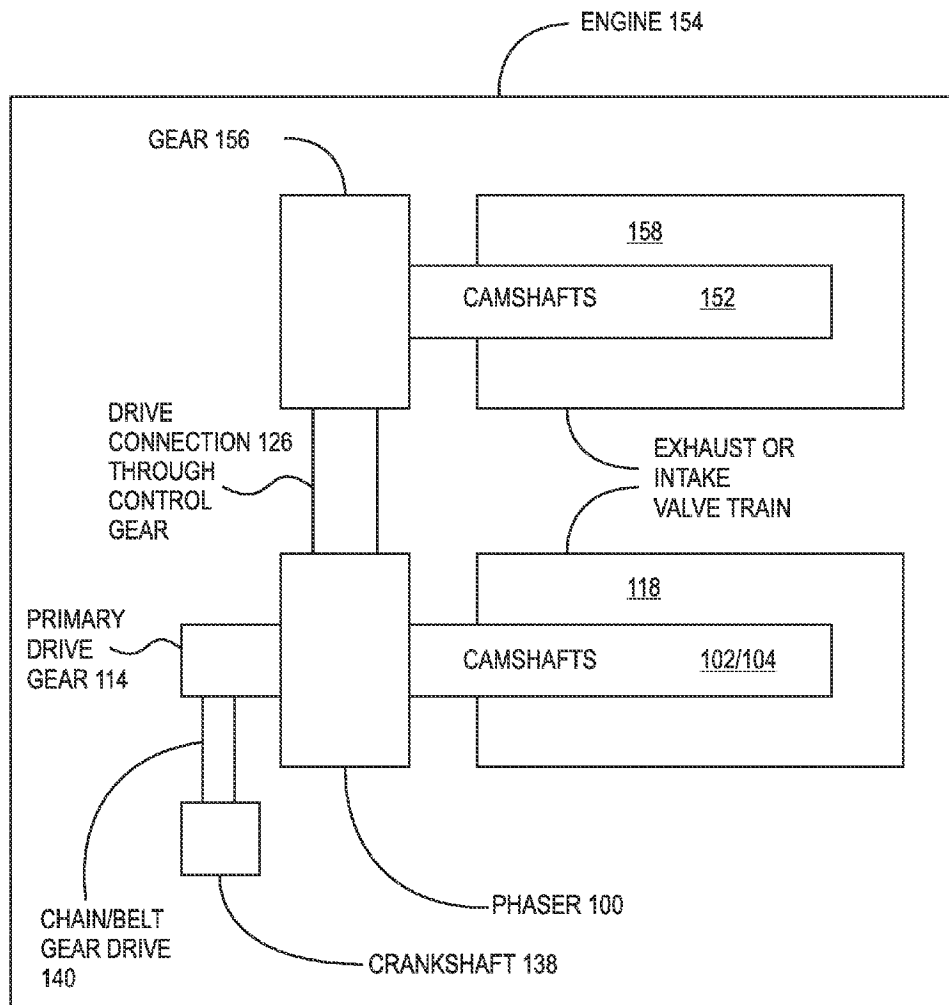


Fig. 7

1

CONCENTRIC CAMSHAFT PHASERCROSS-REFERENCE TO RELATED
APPLICATIONS

This application claims the benefit under 35 U.S.C. §119 (e) of U.S. Provisional Patent Application No. 61/775,904 filed Mar. 11, 2013, which application is incorporated herein in its entirety.

TECHNICAL FIELD

The invention relates generally to camshaft phasers, more specifically to concentric camshaft phasers, and even more specifically to camshaft phasers for diesel engine applications.

BACKGROUND

It is known to use a concentric camshaft phaser (two cam shafts, one radially inside the other) to control an intake or exhaust valve train for an internal combustion engine. It also is known to use a control gear on the camshaft phaser to drive a second gear or gear driven phaser for the intake or exhaust valve train. For proper timing and operation of the phasers, the radial runout of the control gear (circumferential position of the control gear with respect to the cam shafts) must be precisely controlled. The prior art teaches the use of intermediate components, such as fasteners, to secure the control gear to the camshafts. However, the use of intermediate components introduces tolerance variations associated with the components that add an additional degree of error to the runout of the control gear. The introduced tolerances can result in a less precise circumferential location of the control gear with respect to the camshaft, adversely impacting gear durability, and timing of a system using the phaser. In addition, during operation of the phaser, gear loads are indirectly transferred to the camshafts via the phaser, resulting in unreliable radial transfer of the gear loads. Thus, it is difficult to maintain the necessary gear radial runout for reliable, durable, and repeatable operation of the phasers.

SUMMARY

According to aspects illustrated herein, there is provided a concentric cam shaft phaser, including: a first camshaft; a second camshaft located radially inside of the first camshaft; a control gear in contact with the first camshaft and fixedly connected to the first camshaft by a weld, a press fit, or a shrink fit; a rotor non-rotatably connected to the second camshaft; and a stator non-rotatably connected to the control gear.

According to aspects illustrated herein, there is provided a concentric camshaft phaser, including: a first camshaft; a second camshaft located radially inward of the first camshaft; a control gear in contact with a radially outwardly facing surface of the first camshaft and fixedly connected to the first camshaft by a weld, a press fit, or a shrink fit; a rotor non-rotatably connected to the second camshaft; a stator non-rotatably connected to the control gear; and a plurality of chambers at least partially formed by the rotor and the stator and arranged to receive fluid at different pressures to circumferentially displace the rotor with respect to the stator to control a circumferential position of the second camshaft. The control gear is arranged to receive torque to rotate the first and second camshafts and to directly transmit the torque and radial loads to the first camshaft.

2

According to aspects illustrated herein, there is provided a method of fabricating a camshaft assembly, including: placing a control gear about a first camshaft and in contact with an outer circumferential surface of the first camshaft; positioning the control gear at a specified circumferential position with respect to the outer circumferential surface of the first camshaft; connecting the control gear to the first camshaft by welding, press fitting, or shrink fitting; inserting a second camshaft within the first camshaft; non-rotatably connecting a rotor to the second camshaft; and non-rotatably connecting a stator to the control gear.

BRIEF DESCRIPTION OF THE DRAWINGS

The nature and mode of operation of the present invention will now be more fully described in the following detailed description of the invention taken with the accompanying figures, in which:

FIG. 1A is a perspective view of a cylindrical coordinate system demonstrating spatial terminology used in the present application;

FIG. 1B is a perspective view of an object in the cylindrical coordinate system of FIG. 1A demonstrating spatial terminology used in the present application;

FIG. 2 is a perspective cross-sectional view of a concentric cam shaft phaser;

FIG. 3 is a cross-sectional view of the concentric cam shaft phaser of FIG. 2;

FIG. 4 is a front view of the concentric cam shaft phaser of FIG. 2 showing a control gear, stator, and rotor;

FIG. 5 is a schematic block diagram of an engine with a phaser of FIG. 2 connected to a concentric camshaft;

FIG. 6 is a schematic block diagram of an engine with a phaser of FIG. 2 connected to a phaser and single camshaft; and,

FIG. 7 is a schematic block diagram of an engine with a phaser of FIG. 2 connected to a gear and a single camshaft.

DETAILED DESCRIPTION

At the outset, it should be appreciated that like drawing numbers on different drawing views identify identical, or functionally similar, structural elements of the invention. While the present invention is described with respect to what is presently considered to be the preferred aspects, it is to be understood that the invention as claimed is not limited to the disclosed aspect. The present invention is intended to include various modifications and equivalent arrangements within the spirit and scope of the appended claims.

Furthermore, it is understood that this invention is not limited to the particular methodology, materials and modifications described and as such may, of course, vary. It is also understood that the terminology used herein is for the purpose of describing particular aspects only, and is not intended to limit the scope of the present invention, which is limited only by the appended claims.

Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood to one of ordinary skill in the art to which this invention belongs. Although any methods, devices or materials similar or equivalent to those described herein can be used in the practice or testing of the invention, the preferred methods, devices, and materials are now described.

FIG. 1A is a perspective view of cylindrical coordinate system **80** demonstrating spatial terminology used in the present application. The present invention is at least partially described within the context of a cylindrical coordinate

system. System **80** has a longitudinal axis **81**, used as the reference for the directional and spatial terms that follow. The adjectives “axial,” “radial,” and “circumferential” are with respect to an orientation parallel to axis **81**, radius **82** (which is orthogonal to axis **81**), and circumference **83**, respectively. The adjectives “axial,” “radial” and “circumferential” also are regarding orientation parallel to respective planes. To clarify the disposition of the various planes, objects **84**, **85**, and **86** are used. Surface **87** of object **84** forms an axial plane. That is, axis **81** forms a line along the surface. Surface **88** of object **85** forms a radial plane. That is, radius **82** forms a line along the surface. Surface **89** of object **86** forms a circumferential plane. That is, circumference **83** forms a line along the surface. As a further example, axial movement or disposition is parallel to axis **81**, radial movement or disposition is parallel to radius **82**, and circumferential movement or disposition is parallel to circumference **83**. Rotation is with respect to axis **81**.

The adverbs “axially,” “radially,” and “circumferentially” are with respect to an orientation parallel to axis **81**, radius **82**, or circumference **83**, respectively. The adverbs “axially,” “radially,” and “circumferentially” also are regarding orientation parallel to respective planes.

FIG. 1B is a perspective view of object **90** in cylindrical coordinate system **80** of FIG. 1A demonstrating spatial terminology used in the present application. Cylindrical object **90** is representative of a cylindrical object in a cylindrical coordinate system and is not intended to limit the present invention in any manner. Object **90** includes axial surface **91**, radial surface **92**, and circumferential surface **93**. Surface **91** is part of an axial plane, surface **92** is part of a radial plane, and surface **93** is a circumferential surface.

FIG. 2 is a perspective cross-sectional view of concentric cam shaft phaser **100**.

FIG. 3 is a cross-sectional view of concentric cam shaft phaser **100** of FIG. 2.

FIG. 4 is a front view of concentric cam shaft phaser **100** of FIG. 2 showing a control gear, stator, and rotor. The following should be viewed in light of FIGS. 2 through 4. Phaser **100** includes portion **101**, camshaft **102** and camshaft **104** located radially inward, for example, inside, of camshaft **102**. Phaser **100** includes control gear **106**, rotor **108** non-rotatably connected to camshaft **104**, and stator **110** non-rotatably connected to control gear **106**. Control gear **106** is in contact with camshaft **102** and fixedly connected to camshaft **102** by a weld, a press fit, or a shrink fit. By “fixedly connected” we mean control gear **106** is locked to camshaft **102** in axial and circumferential directions and is immovable with respect to camshaft **102**. Torque and radial loads applied to control gear **106** are transmitted directly to camshaft **102**.

In an example embodiment, phaser **100** includes chambers **112** at least partially formed by rotor **108** and stator **110**. Chambers **112** are arranged to receive fluid at different pressures to circumferentially displace rotor **108** with respect to stator **110** to control a circumferential position of camshaft **104**. In an example embodiment, phaser **100** includes primary drive gear **114** arranged to transmit torque to rotate camshafts **102** and **104**.

Rotor **108** is coupled with stator **110** via the fluid, and rotation of stator **110** is transferred to rotor **108** via the fluid coupling. In an example embodiment, at least a portion of stator **110**, for example portion **110A**, is located radially inward of portion of primary drive gear **114** and is radially aligned with primary drive gear **114**. In an example embodiment, at least a portion of stator **110**, for example portion

110B is located radially inward of portion of control gear **106**, for example portion **106A**, and is radially aligned with control gear **106**.

In an example embodiment, at least a portion of rotor **108** is located radially inward of at least a portion of stator **110** and radially aligned with stator **110**. In an example embodiment, at least a portion rotor **108**, for example, portion **108A**, is axially aligned with camshafts **102** and **104**.

In an example embodiment, a circumferential position of primary drive gear **114** with respect to stator **110** is adjustable and for a particular circumferential position, primary drive gear **114** is fixedly secured to stator **110** by fasteners **116** passing through slots **117** in gear **114**. That is, when fasteners **116** are loosened, primary drive gear **114** is rotatable with respect to stator **110** and when fasteners **116** are tightened, the position of primary drive gear **114** with respect to stator **110** is fixed. In an example embodiment (not shown), primary drive gear **114** and stator **110** are formed of a same single piece of material.

FIG. 5 is a schematic block diagram of an engine with phaser **100** of FIG. 2 connected to a concentric camshaft. The following should be viewed in light of FIGS. 2 through 5. In an example embodiment, camshafts **102** and **104** are arranged to operate one of an intake or exhaust valve train **118** for internal combustion engine **120**. In an example embodiment, control gear **106** is arranged to rotate camshafts **122** and **124** via drive connection **126** to phaser **128** including camshafts **122** and **124**. Phaser **100** phases/times phaser **128**, which in turn controls camshafts **122** and **124**. Phaser **128** is for valve train **130**, which is the other of the intake or exhaust valve train for engine **120**. In an example embodiment, phaser **128** has the same construction and functionality as phaser **100**.

In an example embodiment, control gear **106**, in particular, radially inwardly facing surface **132**, is in direct contact with radially outwardly facing surface **134** of camshaft **102**.

The following provides further detail regarding phaser **100**. To resolve the problems noted above regarding radial runout of the control gear and to reliably transfer radial gear loads to the camshaft, control gear **106** is directly mounted on outer camshaft **102** by weld, press fit, or shrink fit. Thus, there are no intermediate components involved in the positioning and securing of control gear **106** to camshaft **102** and the tolerance variations and unreliable transfer of radial gear loads associated with indirect transfer of gear loads through the phaser are eliminated. That is, the direct mounting of control gear **106** to outer camshaft **102** enables the radial runout of gear **106** to be better controlled and for gear loads to be transferred directly to outer camshaft **102**.

As noted above, stator **110** is positioned within phaser **100** to enable a compact radial and axial packaging space. Rotor **108** is positioned within stator **110** and is fixed to camshaft **104** by means of central bolt **136**. Optional primary drive gear/sprocket pulley **114** can be integrated to stator **110** as one piece, or attached by any means known in the art such as bolt, rivet, or weld. Optional primary drive gear/sprocket pulley **114** is driven by crank shaft **138** as known in the art, by means of chain, belt or gear drive **140**. In an example embodiment, the circumferential timing position of primary drive gear **114** relative to stator **110** is adjustable via fasteners **116**, for example during engine assembly.

As is known in the art, the phase or angle of camshaft **104** can be varied relative to the crankshaft by regulating the oil flow/pressure within chambers **112** formed by rotor vanes **142** and stator **110**. In an example embodiment (not shown), primary drive gear **114** is eliminated and control gear **106** is driven by the crankshaft by means of a gear drive system.

5

The following should be viewed in light of FIGS. 2 through 5. The following describes a present invention method for fabricating a concentric camshaft phaser. Although the method is presented as a sequence of steps for clarity, no order should be inferred from the sequence unless explicitly stated. A first step places a control gear, such as control gear 106, about a first camshaft, such as camshaft 102, and in contact with an outer circumferential surface of the first camshaft. A second camshaft, such as camshaft 104, is located within the first camshaft. A third step positions the control gear at a specified circumferential position with respect to the outer circumferential surface of the first camshaft. A fourth step connects the control gear to the first camshaft by welding, press fitting, or shrink fitting. A fifth step non-rotatably connects a rotor, such as rotor 108, to the second camshaft. A sixth step non-rotatably connects a stator, such as stator 110, to the control gear.

In an example embodiment, a seventh step non-rotatably connects a primary drive gear to the stator. In an example embodiment, an eighth step forms a plurality of chambers at least partially bounded by the rotor and the stator and arranged to receive fluid at different pressures to circumferentially displace the rotor with respect to the stator to control a circumferential position of the second camshaft. In an example embodiment, at least a first portion of the stator is located radially inward of a portion of the control gear and radially aligned with the control gear, and at least a second portion of the stator is located radially inward of a portion of the primary drive gear and radially aligned with the primary drive gear.

In an example embodiment, at least a first portion of the rotor is located radially inward of a portion of the stator and radially aligned with the stator, and at least a second portion of the rotor is axially aligned with the first and second camshafts. In an example embodiment, a ninth step circumferentially positions the primary drive gear with respect to the stator and a tenth step fixedly secures the primary gear to the stator with at least one fastener, such as fastener 116. In an example embodiment, an eleventh step forms the primary drive gear and the stator of a same single piece of material.

FIG. 6 is a schematic block diagram of an engine with phaser 100 of FIG. 2 connected to a phaser and single camshaft 144. In an example embodiment, camshafts 102 and 104 are arranged to operate one of an intake or exhaust valve train 118 for internal combustion engine 146. In an example embodiment, control gear 106 is arranged to rotate camshaft 144 via drive connection 126 to phaser 148 including camshaft 144. Phaser 100 phases/times phaser 148, which in turn controls camshaft 144. Phaser 148 is for valve train 150, which is the other of the intake or exhaust valve train for engine 146.

FIG. 7 is a schematic block diagram of an engine with phaser 100 of FIG. 2 connected to a gear and single camshaft 152. In an example embodiment, camshafts 102 and 104 are arranged to operate one of an intake or exhaust valve train 118 for internal combustion engine 154. In an example embodiment, control gear 106 is arranged to rotate camshaft 152 via drive connection 126 to gear 156 and camshaft 152. Phaser 100 phases/times gear 156, which in turn controls camshaft 152. Gear 156 and camshaft 152 are for valve train 158, which is the other of the intake or exhaust valve train for engine 154.

The following describes a present invention method for fabricating a concentric camshaft phaser. Although the method is presented as a sequence of steps for clarity, no order should be inferred from the sequence unless explicitly

6

stated. A first step assembles all the components of the phaser, for example as described above, with the exception of camshafts 102 and 104. A second step assembles camshafts 102 and 104 in the nested configuration described above. A third step connects the nested camshafts to the components assembled in step 1, for example, by shrink fit, press fit, or weld.

The following describes a present invention method for fabricating a concentric camshaft phaser. Although the method is presented as a sequence of steps for clarity, no order should be inferred from the sequence unless explicitly stated. A first step assembles all the components of the phaser, for example as described above, with the exception of gear 106 and camshafts 102 and 104. A second step assembles camshafts 102 and 104 in the nested configuration described above. A third step connects gear 106 to the nested camshafts. A fourth step connects the nested camshafts and gear 106 to the components assembled in step 1, for example, by shrink fit, press fit, or weld.

It will be appreciated that various of the above-disclosed and other features and functions, or alternatives thereof, may be desirably combined into many other different systems or applications. Various presently unforeseen or unanticipated alternatives, modifications, variations, or improvements therein may be subsequently made by those skilled in the art which are also intended to be encompassed by the following claims.

What is claimed is:

1. A concentric cam shaft phaser, comprising:

- a first camshaft;
- a second camshaft located radially inside of the first camshaft;
- a control gear in contact with the first camshaft and fixedly connected to the first camshaft by a weld, a press fit, or a shrink fit;
- a rotor non-rotatably connected to the second camshaft;
- a stator non-rotatably connected to the control gear; and,
- a primary drive gear, separate from the control gear, fixedly secured to the stator, wherein at least a portion of the stator is located radially inward of a portion of the control gear and radially aligned with the control gear.

2. The concentric cam shaft phaser of claim 1, wherein the primary drive gear is arranged to transmit torque to rotate the first and second camshafts.

3. The camshaft assembly of claim 2, wherein the primary drive gear and the stator are formed of a same single piece of material.

4. The camshaft assembly of claim 3, wherein: the rotor is coupled with the stator via the fluid; and, rotation of the stator is transferred to the rotor via coupling of the rotor with the stator.

5. The concentric cam shaft phaser of claim 1, further comprising:

- a plurality of chambers at least partially formed by the rotor and the stator and arranged to receive fluid at different pressures to circumferentially displace the rotor with respect to the stator to control a circumferential position of the second camshaft with respect to the first camshaft.

6. The camshaft assembly of claim 1, wherein at least a portion of the stator is located radially inward of a portion of the primary drive gear and radially aligned with the primary drive gear.

7. The camshaft assembly of claim 1, wherein at least a portion of the rotor is located radially inward of a portion of the stator and radially aligned with the stator.

8. The camshaft assembly of claim 1, wherein at least a portion of the rotor is axially aligned with the first and second camshafts.

9. The camshaft assembly of claim 1, further comprising: a primary drive gear non-rotatably connected to the stator and arranged to transmit torque and radial loads to rotate the first and second camshafts, wherein: a circumferential position of the primary gear with respect to the stator is adjustable; and, in the circumferential position, the primary gear is fixedly secured to the stator by at least one fastener.

10. The camshaft assembly of claim 1 wherein the first and second camshafts are arranged to operate an intake or exhaust valve train for an internal combustion engine.

11. The camshaft assembly of claim 1 wherein the control gear is arranged to rotate third and fourth camshafts.

12. The camshaft assembly of claim 1 wherein the control gear is in direct contact with a radially outwardly facing surface of the first camshaft.

13. The camshaft assembly of claim 1 wherein torque applied to rotate the control gear is transmitted directly to the first camshaft by the control gear.

14. A concentric camshaft phaser, comprising: a first camshaft; a second camshaft located radially inward of the first camshaft; a control gear in contact with a radially outwardly facing surface of the first camshaft and fixedly connected to the first camshaft by a weld, a press fit, or a shrink fit; a rotor non-rotatably connected to the second camshaft; a stator non-rotatably connected to the control gear; a primary drive gear, separate from the control gear, fixedly secured to the stator; and, a plurality of chambers at least partially formed by the rotor and the stator and arranged to receive fluid at

different pressures to circumferentially displace the rotor with respect to the stator to control a circumferential position of the second camshaft, wherein: the primary drive gear is arranged to receive torque and radial loads to rotate the first and second camshafts and to directly transmit the torque and radial loads to the control gear.

15. The camshaft assembly of claim 14 wherein the first and second camshafts are arranged to operate an intake or exhaust valve train for an internal combustion engine.

16. The camshaft assembly of claim 14, wherein at least a portion of the stator is located radially inward of a portion of the control gear and radially aligned with the control gear.

17. A concentric cam shaft phaser, comprising: a control gear arranged to contact with a first camshaft and arranged to be fixedly connected to the first camshaft; a rotor arranged to non-rotatably connected to a second camshaft, the second camshaft located radially inside of the first camshaft; a stator non-rotatably connected to the control gear; and, a primary drive gear, separate from the control gear, fixedly secured to the stator, wherein at least a portion of the stator is located radially inward of a portion of the control gear and radially aligned with the control gear.

18. The camshaft assembly of claim 17, wherein at least a portion of the stator is located radially inward of a portion of the control gear and radially aligned with the control gear.

19. The camshaft assembly of claim 17, wherein at least a portion of the stator is located radially inward of a portion of the primary drive gear and radially aligned with the primary drive gear.

* * * * *